





PLOT PLAN

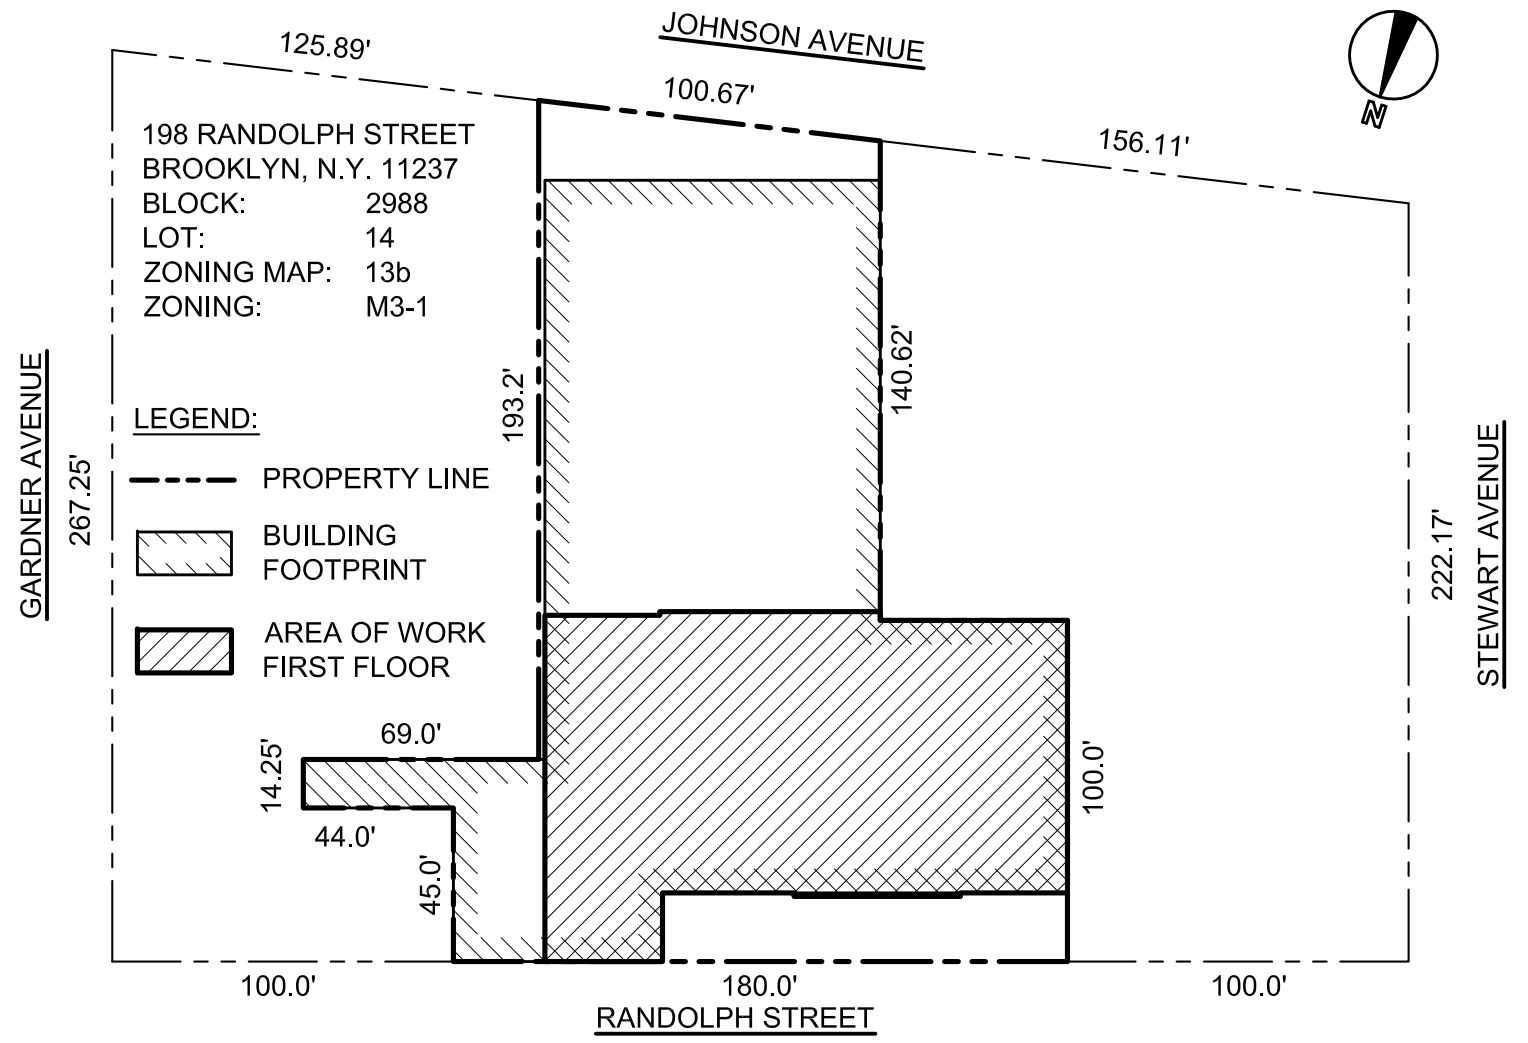

LOCATION MAP

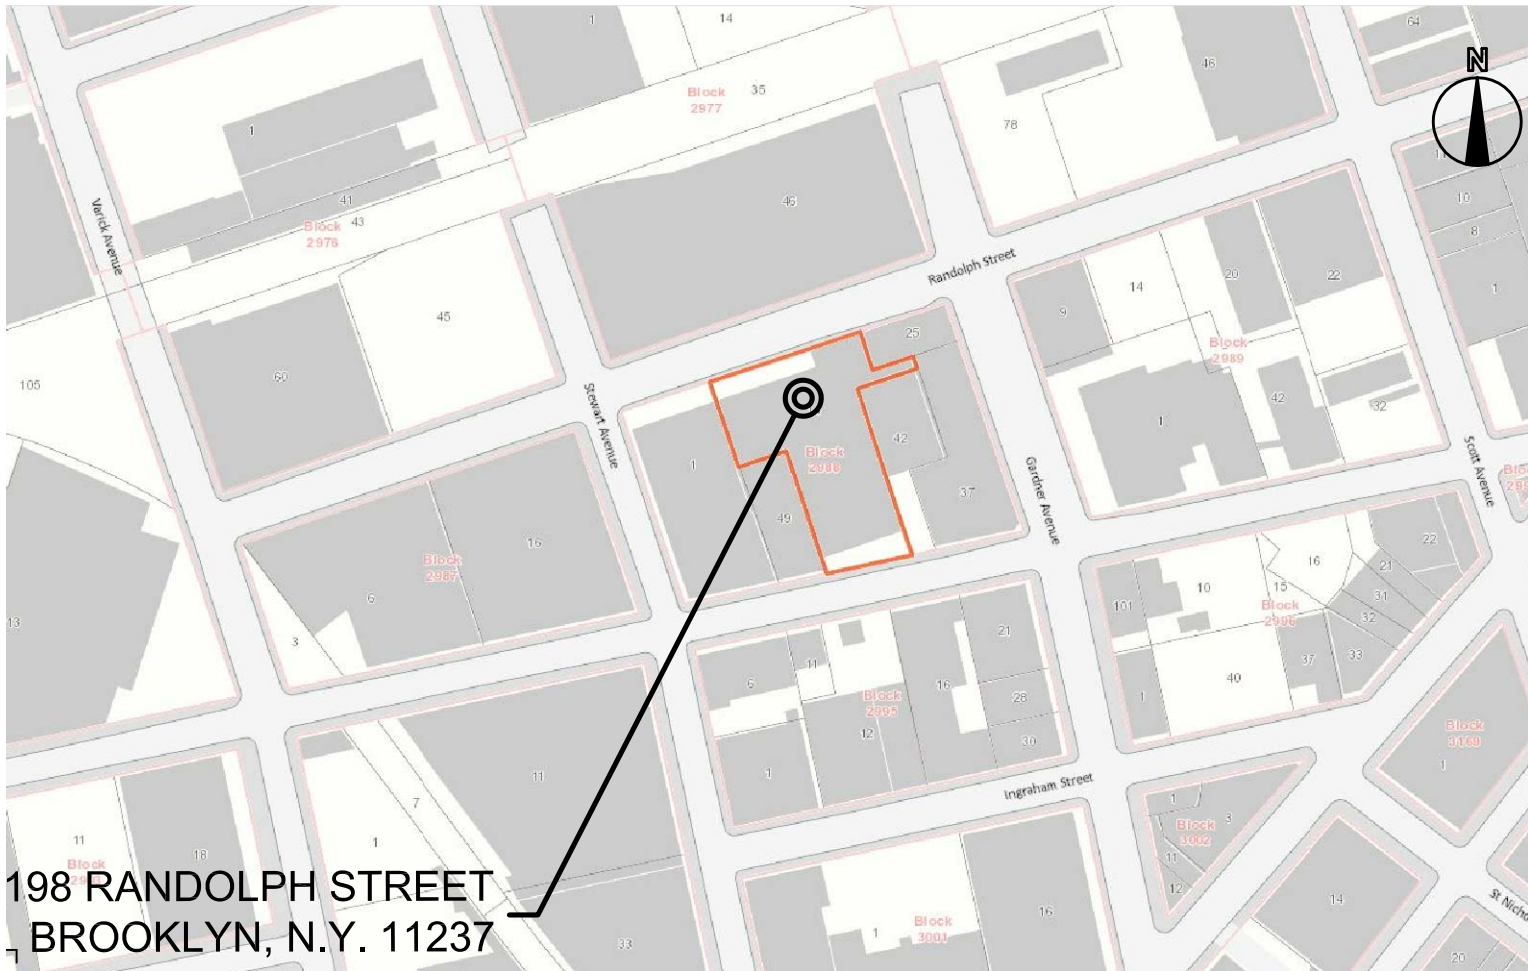

FLOOD MAP

PROPERTY IS NOT IN SFHA
ZONE X-AREA DETERMINED TO BE OUTSIDE
THE 0.2% ANNUAL CHANCE FLOODPLAIN

LEGEND

- EXISTING CONSTRUCTION TO REMAIN FIRE RATING AS NOTED.
FIRE RATING TO BE VERIFIED IN FIELD BY CONTRACTOR
- EXISTING CONSTRUCTION TO BE REMOVED
- NEW PARTITION CONSTRUCTION
SEE PLAN AND TYPICAL PARTITION DETAIL.
- NEW PARTITION CONSTRUCTION - 2 HOUR FIRE RATED
SEE PLAN AND TYPICAL PARTITION DETAIL
- NYC APPROVED 40 LINE EXIT SIGN
(BATTERY PACKS ON SEPARATE CIRCUIT)
- DIRECTIONAL NYC APPROVED 40 LINE EXIT SIGN
(BATTERY PACKS ON SEPARATE CIRCUIT)
- EMERGENCY LIGHT (2 LIGHTS)
(BATTERY PACKS ON SEPARATE CIRCUIT)
- EMERGENCY LIGHT (3 LIGHT)
(BATTERY PACKS ON SEPARATE CIRCUIT)
- SMOKE DETECTOR
- CARBON MONOXIDE DETECTOR

PROJECT DIRECTORY

CLIENT

Eric Cohen
198 Randolph Street
Brooklyn, NY. 11237
(646) 417-8439

ARCHITECT OF RECORD

SWA Architecture PLLC
11 Park Place
Suite 817
New York, NY. 10007
(631) 424-8480

STRUCTURAL ENGINEER

Wexler Associates
12 West 32nd Street
8th Floor
New York, NY. 10001
(212) 643-1500

MECHANICAL ENGINEER

Benjamin Klein
M.E.P. Designs, Inc.
1839 Ocean Parkway
Brooklyn, NY. 11223
(718) 998-0660

SPECIAL INSPECTING AGENCY

SPECIAL INSPECTING AGENCY

SPECIAL INSPECTING AGENCY

SPECIAL INSPECTING AGENCY

DRAWING INDEX

GENERAL INFORMATION

T-001.00	Cover sheet
G-001.00	General notes & list of required inspections
G-100.00	Code analysis

ARCHITECTURAL

A-100.00	Existing/Demo 1st floor plan
A-200.00	Proposed 1st floor plan
A-201.00	Proposed mezzanine plan
A-202.00	Proposed roof plan
A-300.00	Existing elevation and proposed section & elevation
A-301.00	First floor reflected ceiling plan
A-400.00	Enlarged ada toilet room and details
A-401.00	Door schedule, wall types and details



11 PARK PLACE, SUITE 817
NEW YORK, NY 10007
PHONE: 212-832-7566

190 EAST MAIN STREET
HUNTINGTON, NY 11743
PHONE: 631-424-8480 FAX: 631-547-4193

PROJECT

ALT. 2
198 RANDOLPH STREET

198 RANDOLPH STREET
BROOKLYN, N.Y. 11237


MEP ENGINEER
NAME: BENJAMIN KLEIN
ADDRESS: 1839 OCEAN PARKWAY
CITY: BROOKLYN
STATE: NEW YORK
ZIP: 11223
TEL: 718-998-0660
E-MAIL: BKLEIN@MEPDESIGNS.NET

STRUCTURAL ENGINEER
NAME: WEXLER ASSOCIATES
ADDRESS: 12 WEST 32ND STREET
CITY: NEW YORK
STATE: NEW YORK
ZIP: 10001
TEL: 212-643-1500
E-MAIL: NWEXLER@NWEXLER.COM

SPECIAL INSPECTOR:

NAME:
ADDRESS:
CITY:
STATE:
ZIP:
TEL:
E-MAIL:

REVISIONS:

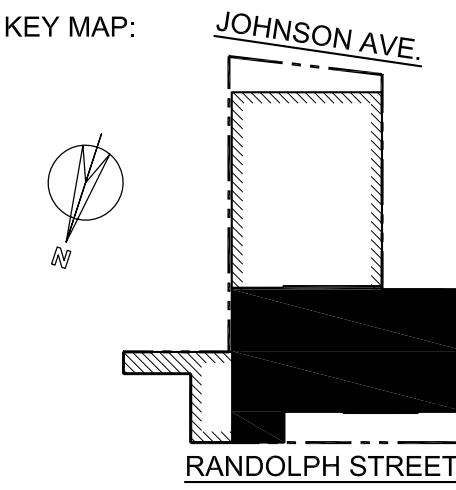

DOB B-SCAN

SCOPE OF WORK

INTERIOR DEMO AT THE FIRST FLOOR LEVEL TO INCLUDE REMOVAL OF
PARTITIONS, TOILET ROOM, FINISH CEILING AND FINISH FLOORING.

LIST OF SEPARATE APPLICATIONS:

ALT-1	FILED SEPARATELY
PLUMBING/MECH.	FILED SEPARATELY
STRUCTURAL	FILED SEPARATELY
SPRINKLER	FILED SEPARATELY
FIRE ALARM	FILED SEPARATELY
PUBLIC ASSEMBLY	FILED SEPARATELY

COVER SHEET

SEAL & SIGNATURE:

DATE: 07-13-2016
DWG No.:

T-001.00

SPECIAL AND CONTROL INSPECTIONS

CONTROLLER INSPECTIONS SHALL BE OBTAINED FOR THE FOLLOWING AREAS OF WORK. INSPECTIONS SHALL BE MADE AND WITNESSED BY OR UNDER THE DIRECT SUPERVISION OF AN ARCHITECT OR ENGINEER RETAINED BY THE OWNER AND ACCEPTABLE TO THE ARCHITECT OF RECORD. TEST REPORTS AND CERTIFICATES OF INSPECTION SHALL BE FILED WITH THE BUILDING DEPARTMENT:

- ☐ STRUCTURAL STEEL - WELDING

☐ STRUCTURAL STEEL - DETAILS

☐ STRUCTURAL STEEL - HIGH STRENGTH BOLTING

☐ STRUCTURAL COLD-FORMED STEEL

☐ CONCRETE - CAST-IN-PLACE

☐ CONCRETE - PRECAST

☐ CONCRETE - PRESTRESSED

☐ MASONRY

☐ WOOD - INSTALLATION OF HIGH-LOAD DIAPHRAGMS

☐ WOOD - INSTALLATION OF METAL-PLATE CONNECTED TRUSSES

☐ WOOD - INSTALLATION OF PREFABRICATED I-JOISTS

☐ SUBGRADE INSPECTION

☐ SUBSURFACE CONDITIONS - FILL PLACEMENT

☐ & IN-PLACE DENSITY

☐ SUBSURFACE INVESTIGATIONS (BORINGS/TEST PITS)

☐ DEEP FOUNDATION ELEMENTS

☐ HELICAL PILES (BB # 2014-020)

☐ VERTICAL MASONRY FOUNDATION ELEMENTS

☐ WALL PANELS, CURTAIN WALLS, AND VENEERS

☐ SPRAYED FIRE-RESISTANT MATERIALS

☐ MASTIC AND INTUMESCENT FIRE-RESISTANT COATING

☐ EXTERIOR INSULATION FINISH SYSTEMS (EIFS)

☐ ALTERNATIVE MATERIALS-OTCR BUILDINGS BULLETIN #

☐ SMOKE CONTROL SYSTEMS

☐ MECHANICAL SYSTEMS

☐ FUEL-OIL STORAGE AND FUEL OIL PIPING SYSTEMS

☐ HIGH-PRESSURE STEAM PIPING (WELDING)

☐ HIGH TEMPERATURE HOT WATER PIPING (WELDING)

☐ FUEL-GAS PIPING (WELDING)

☐ STRUCTURAL STABILITY - EXISTING BUILDING

☐ EXCAVATIONS-SHEETING, SHORING, AND BRACING

☐ UNDERPINNING

☐ MECHANICAL DEMOLITION

☐ RAISING AND MOVING OF A BUILDING

☐ SOIL PERCOLATION TEST- PRIVATE ON-SITE STORM WATER DRAINAGE DISPOSAL SYSTEMS, AND DETENTION FACILITIES

☐ PRIVATE ON-SITE STORM WATER DRAINAGE DISPOSAL SYSTEMS, AND DETENTION FACILITIES INSTALLATION

☐ INDIVIDUAL ON-SITE PRIVATE SEWAGE DISPOSAL SYSTEMS INSTALLATION

☐ SOIL PERCOLATION TEST-INDIVIDUAL ON-SITE PRIVATE SEWAGE DISPOSAL SYSTEMS

☐ SPRINKLER SYSTEMS

☐ STANDPIPE SYSTEMS

☐ HEATING SYSTEMS

☐ CHIMNEYS

☒ FIRE-RESISTANT PENETRATIONS AND JOINTS

☐ ALUMINUM WELDING

☐ FLOOD ZONE COMPLIANCE (ATTACH FEMA ELEVATION/DRY FLOORPROOFING CERTIFICATE WHERE APPLICABLE

☐ LUMINOUS EGRESS PATH MARKINGS

☐ EMERGENCY AND STANDBY POWER SYSTEMS (GENERATORS)

☐ POST-INSTALLED ANCHORS (BB#2014-018, 2014-013)

☐ SEISMIC ISOLATION SYSTEMS

☐ CONCRETE DESIGN MIX

☐ CONCRETE SAMPLING AND TESTING

☐ PRELIMINARY

☐ FOOTING AND FOUNDATION

☐ LOWEST FLOOR ELEVATION

☐ STRUCTURAL WOOD FRAME

☐ ENERGY CODE COMPLIANCE

☒ FIRE RESISTANCE RATED CONSTRUCTION

☐ PUBLIC ASSEMBLY EMERGENCY LIGHTING

☐ FINAL
- (BC 1704.3.1)

(BC 1704.3.2)

(BC 1704.3.3)

(BC 1704.3.4)

(BC 1704.4.4)

(BC 1704.4)

(BC 1704.4)

(BC 1704.5)

(BC 1704.6.1)

(BC 1704.6.2)

(BC 1704.6.3)

(BC 1704.7.1)

(BC 1704.7.2, BC 1704.7.3)

(BC 1704.7.4)

(BC 1704.8)

(BC 1704.8.5)

(BC 1704.9)

(BC 1704.10)

(BC 1704.11)

(BC 1704.12)

(BC 1704.13)

(BC 1704.14)

(BC 1704.15)

(BC 1704.16)

(BC 1704.17)

(BC 1704.18)

(BC 1704.18)

(BC 1704.19)

(BC 1704.19)

(BC 1704.20.2)

(BC 1704.20.3, BC 1814)

(BC 1704.20.4)

(BC 1704.20.5)

(BC 1704.21.1,2)

(BC 1704.21.2)

(BC 1704.22)

(BC 1704.22)

(BC 1704.23)

(BC 1704.24)

(BC 1704.25)

(BC 1704.26)

(BC 1704.27)

(BC 1704.28)

(BC 1704.29,BC G105)

(BC 1704.30, BC1024.8)

(1704.31)

(BC 1704.32)

(BC 1707.08)

(BC 1905.3, BC 1913.5)

(BC 1905.6, BC 1913.10)

(BC 28-116.2.1, BC 110.2)

(BC 110.3.1)

(BC 110.3.2)

(BC 110.3.3)

(BC 110.3.5)

(BC 110.3.4)

(28-116.2.2)

(28-116.2.4.2, BC 110.5, DIRECTIVE 14 OF 1975, AND 1RCNY101-10)

ENERGY CODE PROGRESS INSPECTION

- ☐ PROTECTION OF EXPOSED FOUNDATION INSULATION

☐ INSULATION PLACEMENT AND R VALUES

☒ FENESTRATION U-FACTOR AND PRODUCT RATING

☒ FENESTRATION AIR LEAKAGE

☒ FENESTRATION AREAS

☐ AIR SEALING AND INSULATION - VISUAL

☐ AIR SEALING AND INSULATION - TESTING

☐ PROJECTION FACTORS

☐ LOADING DECK WEATHER SEALS

☐ VESTIBULES

☐ FIREPLACES

☐ SHUTOFF DAMPERS

☐ HVAC AND SERVICE WATER HEATING EQUIPMENT

☐ HVAC AND SERVICE WATER HEATING SYSTEM CONTROLS

☐ HVAC INSULATION AND SEALING

☐ DUCT LEAKAGE TESTING

☐ ELECTRICAL ENERGY CONSUMPTION

☐ LIGHTING IN DWELLING UNITS

☐ INTERIOR LIGHTING POWER

☐ EXTERIOR LIGHTING POWER

☐ LIGHTING CONTROLS

☒ EXIT SIGNS

☐ ELECTRICAL MOTORS

☐ MAINTENANCE INFORMATION

☐ PERMANENT CERTIFICATION
- (IA1),(IIA1)

(IA2),(IIA2)

(IA3),(IIA3)

(IA4),(IIA4)

(IA5),(IIA5)

(IA6),(IIA7)

(IA7)

(IIA7)

(IIA8)

(IIA9)

(IB1),(IIB1)

(IB2),(IIB2)

(IB3),(IIB3)

(IB4),(IIB4)

(IB5),(IIB5)

(IB6),(IIB6)

(IC1),(IIC1)

(IIC2)

(IC2),(IIC3)

(IIC4)

(IIC5)

(IIC6)

(IIC7)

(ID1),(IID1)

(ID2)

GENERAL NOTES:

1. SCOPE OF WORK SHALL INCLUDE ALL WORK AS SHOWN ON DRAWINGS, NOTES OR AS REVIEWED VERBALLY PRIOR TO BIDDING. (ANY WORK ADDED FOLLOWING FINAL BID SUBMITTAL SHALL BE INCLUDED AS A CHANGE ORDER.)

2. ALL WORK SHALL CONFORM TO THE REQUIREMENTS OF THE NEW YORK CITY BUILDING CODES, FIRE DEPARTMENT REGULATIONS, UTILITY COMPANY REQUIREMENTS, AND THE BEST TRADE PRACTICES.

3. PREMISES TO COMPLY WITH ALL ARTICLES OF THE HOUSING MAINTENANCE CODE, AS APPLICABLE.

4. BEFORE COMMENCING WORK, THE CONTRACTOR SHALL FILE ALL REQUIRED CERTIFICATES OF INSURANCE WITH THE DEPARTMENTS OF BUILDING, OBTAIN ALL REQUIRED PERMITS, AND PAY ALL FEES REQUIRED BY GOVERNING NEW YORK CITY AGENCIES.

5. THE CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS IN THE FIELD PRIOR TO COMMENCING WORK, AND SHALL REPORT ANY DISCREPANCIES BETWEEN DRAWINGS AND FIELD CONDITIONS TO THE ARCHITECT.

6. CONTRACTOR TO COORDINATE VARIOUS ELEMENTS OF THE WORK AND ENTITIES ENGAGED TO PERFORM WORK AND COORDINATE WORK WITH EXISTING FACILITIES/CONDITIONS AND WITH ANY WORK BY SEPARATE CONTRACTORS AND BY OWNER.

7. CALCULATE DIMENSIONS AND MEASURE FOR LAYOUT OF WORK. DO NOT SCALE THE DRAWINGS. RECORD ANY DEVIATIONS (IF ANY) FROM DRAWING INFORMATION ON EXISTING CONDITIONS AND REVIEW WITH ARCHITECT AT TIME OF DISCOVERY.

8. MINOR DETAILS NOT USUALLY SHOWN OR SPECIFIED, BUT NECESSARY FOR PROPER CONSTRUCTION OR INSTALLATION OF ANY PART OF THE WORK SHALL BE INCLUDED AS IF THEY WERE INDICATED IN THE DRAWINGS.

9. THE CONTRACTOR SHALL COORDINATE ALL WORK PROCEDURES WITH REQUIREMENTS OF LOCAL AUTHORITIES, BUILDING MANAGEMENT OR BOARD OF DIRECTORS.

10. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF ALL CONDITIONS AND MATERIALS WITHIN THE PROPOSED CONSTRUCTION AREA. THE CONTRACTOR SHALL HAVE SOLE RESPONSIBILITY FOR ANY DAMAGE OR INJURIES CAUSED BY OR DURING THE EXECUTION OF THE WORK.

11. THE CONTRACTOR SHALL COORDINATE ALL DELIVERIES AND REMOVALS AND ALL OTHER TIMES WHEN THE USE OF THE SERVICE ELEVATOR SHALL BE REQUIRED WITH THE BUILDING MANAGER.

12. THE CONTRACTOR SHALL LAY OUT HIS OWN WORK, AND SHALL PROVIDE ALL DIMENSIONS REQUIRED FOR OTHER TRADES (PLUMBING, ELECTRICAL, ETC.)

13. PLUMBING AND ELECTRICAL WORK SHALL BE PERFORMED BY PERSONS LICENSED IN THEIR TRADES, WHO SHALL ARRANGE FOR AND OBTAIN INSPECTIONS AND REQUIRED SIGN-OFFS.

14. THE CONTRACTOR SHALL DO ALL CUTTING, PATCHING AND REPAIRING AS REQUIRED TO PERFORM ALL OF THE WORK INDICATED ON THE DRAWINGS, AND ALL OTHER WORK THAT MAY BE REQUIRED TO COMPLETE THE JOB.

15. CONTRACTOR ACCESS TO OTHER SPACES WITHIN THE BUILDING AS REQUIRED FOR PLUMBING AND ELECTRICAL WORK SHALL BE COORDINATED WORK WITH BUILDING MANAGER.

16. ALL CORING AND DRILLING REQUIRED TO BE PERFORMED AT TIMES ONLY AS ALLOWED BY BUILDING RULES, REGULATIONS OR POLICIES. COORDINATE WORK WITH BUILDING MANAGER.

17. CONTRACTOR TO PROVIDE FIRE-STOPPING OF REQUIRED RATING WHERE NEW YORK PENETRATES FIRE-RATED PARTITIONS, WALLS, CEILINGS AND FLOORS.

18. CONTRACTOR TO REQUIRE INSTALLER OF EACH UNIT OF WORK TO INSPECT SUBSTRATE AND CONDITIONS FOR INSTALLATION PRIOR TO INSTALLATION. CONTRACTOR TO CORRECT UNSATISFACTORY CONDITIONS. INSPECT EACH PRODUCT IMMEDIATELY BEFORE INSTALLATION. DO NOT INSTALL DAMAGED OR DEFECTIVE PRODUCTS, MATERIALS OR EQUIPMENT.

19. COMPLY WITH MANUFACTURES' INSTRUCTIONS AND RECOMMENDATIONS TO THE EXTENT THAT PRINTED INFORMATION IS MORE DETAILED OR STRINGENT THAN THE REQUIREMENTS CONTAINED DIRECTLY IN CONTACT DRAWINGS.

20. ANCHOR WORK SECURELY IN PLACE, PROPERLY LOCATED BY MEASURED LINE AND LEVEL, ORGANIZED FOR BEST UNIFORMITY, VISUAL EFFECT, OPERATIONAL EFFICIENCY, DURABILITY AND SIMILAR BENEFIT TO OWNER'S USE. WHEN ANY DOUBT EXISTS OF EXACT DIMENSIONS OR LOCATION OF EXACT DIMENSIONS OR LOCATION OF WORK, NOTIFY ARCHITECT FOR CLARIFICATION.

21. CLEAN EACH ELEMENT OF WORK AT TIME OF INSTALLATION. PROVIDE SUFFICIENT MAINTENANCE AND PROTECTION DURING CONSTRUCTION TO ENSURE FREEDOM FROM DAMAGE AND DETERIORATION AT TIME OF SUBSTANTIAL COMPLETION.

22. ALL WORK TO BE IN COMPLIANCE WITH PARK WEST TENANTS CORPORATION ALTERATION AGREEMENT

23. CONTRACTOR TO PROVIDE COPIES OFF ALL PERMITS AND INSURANCE PRIOR TO COMMENCING WORK.

24. ANY WORK PRACTICES INVOLVING EXISTING LEAD PAINT WITHIN THE PREMISES WHICH MAY BE DISTURBED DURING CONSTRUCTION, SHOULD BE HANDLED BY PEOPLE LICENSED FOR THIS WORK IN ACCORDANCE WITH FEDERAL, STATE, AND N.Y.C. LAWS AND IMPLEMENTING REGULATIONS REGARDING LEAD BASED PAINT HAZARDS.

25. COORDINATE SHUTDOWN OF BASE BUILDING UTILITIES WITH BUILDING MANAGEMENT.

26. NO CHOPPING OR CHANNELING OF THE FLOOR OR CEILING STRUCTURAL SLAB WILL BE PERMITTED, OR REMOVAL OF REQUIRED FIREPROOFING/FIRE PROTECTION.

27. WATERPROOFING MEMBRANE (LATICRETE, NOBLESEAL OR EQUAL) BE INSTALLED UNDER THE ENTIRE FINISHED FLOOR OF THE KITCHEN & MASTER BATHROOM, TURNED UP 6" MINIMUM AT THE WALLS, TO AFFORD ADDITIONAL PROTECTION TO SPACES BELOW.

CARPENTRY AND DRYWALL NOTES:

1. THE CONTRACTOR SHALL FURNISH AND INSTALL ALL PARTITIONS, DOORS AND JAMBS, AS INDICATED ON THE DRAWINGS.

2. CONTRACTOR SHALL FURNISH AND INSTALL CORNER BEADS AT ALL EXPOSED CORNERS AND J-MOLDNGS ON ALL EXPOSED ENDS OF DRYWALL CONSTRUCTION. TAPE, SPACKLE, AND POLISH ALL WORK.

3. FURNISH AND INSTALL SUFFICIENT FRAMING FOR ALL WALL OPENINGS REQUIRED.

4. ALL DIMENSIONS OF PARTITIONS ARE GIVEN FROM FINISH FACE TO FINISH FACE UNLESS OTHERWISE NOTED.

5. ALL DAMAGED "EXISTING TO REMAIN" AREAS OR AREAS AFFECTED BY DEMOLITION OR OTHER WORK TO BE PATCHED AS REQUIRED TO MATCH ADJACENT AREAS IN FINISH, COLOR, MATERIAL, AND FIRE RATING.

6. CONTRACTOR SHALL FURNISH, INSTALL, AND COORDINATE ALL NECESSARY WOOD GROUNDS, CORNER CASINGS, AND REQUIRED WOOD BLOCKING AND SHIMMING WITH MILLWORK CONTRACTOR, CEILING CONTRACTOR, AND/OR OTHER TRADES AS REQUIRED.

7. ALL ROUGH AND FINISH LUMBER SPECIFIED AND/OR USED SHALL BE FIRE TREATED RETARDANT PER ALL APPLICABLE RULES AND REGULATIONS PER SECTION 27-328 OF THE NEW YORK CITY BUILDING CODE.

8. CONTRACTOR TO ISOLATE CONSTRUCTION AREA FROM OCCUPIED BUILDING AREAS BY MEANS OF HEAVY WEIGHT DROP CLOTHS. CONTRACTOR SHALL VERIFY ALL WINDOW OPENING DIMENSIONS PRIOR TO FABRICATION OF NEW WINDOWS. ALL WINDOW DIMENSIONS SHOWN ON PLANS ARE BETWEEN STOP BEADS.

9. NO JOISTS SHALL BE CUT NOR NOTCHED.

10. ALL METAL STUD AND WALLBOARD PARTITIONS, EXCEPT AT TOILETS, BATHROOMS, AND OTHER WET WALLS SHALL BE SHEATHED WITH 5 5/8" FIRECODE "X" WALLBOARD BSA AL #301-60-SM.

11. ALL METAL STUD AND WALLBOARD PARTITIONS AT ALL TOILETS, BATHROOMS, AND OTHER WET WALLS SHALL BE SHEATHED WITH 5/8" FIRECODE "C" WATER RESISTANT WALLBOARD OSA CAL #486-39-M OR CEMENTIOUS WALLBOARD AS NOTED AND/OR KEYED.

12. PARTITIONS ADJACENT TO RANGES SHALL BE FIRE RETARDED WITH ONE (1) LAYER OF 5/8" FIREC CODE "C" GYPSUM WALLBOARD. WOOD OR COMPOSITION BOARD CABINETS ADJACENT TO RANGES SHALL BE FIRE RETARDED AS REQUIRED BY THE DEPT OF BLDGS AND THE ADMINISTRATIVE CODE.

13. ALL FPSC DOORS SHALL BE 1-HOUR TEST INCLUDING JAMBS AND TRIM AS APPROVED BY THE DEPARTMENT OF BUILDINGS UNLESS OTHERWISE NOTED. DOORS TO PUBLIC STAIRS AND OTHER LOCATIONS AS REQUIRED BY THE DEPT OF BLDGS SHALL BE 1-1/2 HOUR TEST RATED.

14. ALL MATERIALS AND EQUIPMENT WHICH ARE INSTALLED OVERHEAD SUCH AS CEILINGS, LIGHTING FIXTURES, AIR DUCTS, PIPES, MECHANICAL EQUIPMENT AND OTHERS MUST BE PROPERLY AND FIRMLY SUSPENDED FROM THE STRUCTURAL ELEMENTS OF THE BUILDING OR FROM A HANGER SYSTEM APPROVED BY THE NYC BUILDING CODE TO CARRY SUCH LOAD. THE CONTRACTOR AND SUBCONTRACTOR ARE ALWAYS RESPONSIBLE FOR PROVIDING SAFE AND APPROPRIATE SUSPENSION OF ALL MATERIALS AND EQUIPMENT INSTALLED OVERHEAD EVEN WHEN SUCH METHODS ARE NOT SPECIFICALLY CALLED FOR ON THE ARCHITECT'S DRAWINGS OR SPECIFICATIONS.

15. NO ELECTRIC PANELS, MEDICINE CABINETS, CONDUITS, PIPES, ETC. SHALL ENCROACH UPON FIRE RESISTIVE PARTITIONS ENCLOSING PUBLIC HALLS, FIRE STAIRS, ELEVATOR, AND VENTILATION SHAFTS, OR SEPARATING APARTMENTS FROM EACH OTHER OR FROM OTHER OCCUPANCY GROUPS.

16. ALL PLUMBING AND ELECTRICAL LINES AND DUCT WORK SHALL BE ENCLOSED IN GYPSUM WALLBOARD SOFFITS, CHASES, OR SHAFTS UNLESS OTHERWISE NOTED OR SPECIFICALLY SHOWN ENCLOSED IN SOME OTHER MANNER.

17. ALL PIPE RECESSES SHALL BE FILLED WITH INCOMBUSTIBLE MATERIAL AND FIRESTOPPED.

18. THE ARCHITECT HAS NOT BEEN RETAINED FOR SUPERVISION.

DEMOLITION NOTES:

1. CONTRACTOR SHALL PERFORM ALL OPERATIONS OF DEMOLITION AND REMOVAL INDICATED ON DRAWINGS AND AS MAY BE REQUIRED BY THE WORK. ALL WORK SHALL BE DONE CAREFULLY AND NEATLY, IN A SYSTEMATIC MANNER.

2. ALL EXISTING SURFACES AND EQUIPMENT SHALL BE FULLY PROTECTED FROM DAMAGE. THE CONTRACTOR SHALL ASSUME FULL RESPONSIBILITY FOR DAMAGE AND SHALL MAKE REPAIRS REQUIRED WITHOUT ADDITIONAL COST TO THE OWNER.

3. NO DEBRIS SHALL ACCUMULATE ON THE SITE. DEBRIS SHALL BE REMOVED BY THE CONTRACTOR AS THE JOB PROCEEDS. THE SITE SHALL BE LEFT BROOM CLEAN AT THE COMPLETION OF DEMOLITION.

4. NO STRUCTURAL ELEMENTS SHALL BE REMOVED UNLESS PORTIONS AFFECTED ARE ADEQUATELY SUPPORTED BY EITHER TEMPORARY SHORING OR NEW STRUCTURAL ELEMENTS AS REQUIRED TO PROTECT THE STABILITY AND INTEGRITY OF THE EXISTING STRUCTURE.

5. ALL ADJOINING PROPERTY AFFECTED BY ANY OPERATIONS OF DEMOLITION SHALL BE PROTECTED BY THE REQUIREMENTS OF ARTICLE 19 OF NEW YORK CITY BUILDING CODE. OF THE

6. REMOVE OR RELOCATE ALL WIRING, PLUMBING, MECHANICAL EQUIPMENT, ETC. AFFECTED BY REMOVAL OF PARTITIONS. REMOVED PIPES AND/OR LINES SHALL BE CUT TO POINT OF CONCEALMENT BEHIND OR BELOW FINISHED SURFACES, AND SHALL BE PROPERLY CAPPED, PLUGGED OR DISCONNECTED.

7. PROPERTY IS TO BE KEPT SECURE AT ALL TIMES.

8. THE CONTRACTOR SHALL PROVIDE ADEQUATE WEATHER PROTECTION FOR THE BUILDING AND ITS CONTENTS DURING THE COURSE OF THE WORK. ALL OPENINGS IN ANY WALL SHALL BE PROTECTED FROM ALL FORMS OF WEATHER OR WATER PENETRATION.

9. DISCONNECT AND SEAL UTILITIES SERVING ITEMS TO BE REMOVED PRIOR TO START OF DEMOLITION WORK.
10. PROMPTLY REPAIR DAMAGES TO EXISTING ITEMS IN AREA OF WORK AND ADJACENT SPACES CAUSED BY DEMOLITION OPERATIONS AT NO COST TO OWNER.

11. PATCH ALL SURFACES, SUBSTRATES AND FINISHES SURROUNDING AND AFFECTED BY REMOVALS AND BRING UP TO NEW CONDITIONS.

12. PATCH, REPAIR OR REPLACE SUB FLOORING IN PREPARATION TO RECEIVE NEW FLOOR FINISHES.

13. STORE ALL SALVAGED MATERIALS AS NOTED FOR REUSE IN A SAFE AND SECURE LOCATION TO PREVENT DAMAGED OR THEFT. PROPERTY IS TO BE KEPT SECURE AT ALL TIMES.

14. REMOVE FROM SITE ALL DEBRIS, RUBBISH AND OTHER MATERIALS RESULTING FROM DEMOLITION WORK AND AS REQUIRED DURING THE COURSE OF THE NEW CONSTRUCTION WORK.

SMOKE & CARBON MONOXIDE DETECTOR NOTES:

1. EACH DWELLING UNIT SHALL BE EQUIPPED WHIT AN APPROVED TYPE SMOKE DETECTION AND CARBON MONOXIDE DEVICE RECEIVING ITS PRIMARY POWER FROM BUILDING WIRING WITH NO SWITCH IN CIRCUIT OTHER THAN THE OVER CIRCUIT PROTECTING THE BRANCH CIRCUIT AS PER SEC. C26-1705.3.

2. SUCH A SMOKE DETECTOR AND CARBON MONOXIDE SHALL BE EITHER THE IONIZATION CHAMBER TYPE OR THE PHOTOELECTRIC TYPE AS PER C26-1705 i-b

3. ALL SMOKE AND CARBON MONOXIDE DETECTORS MUST BE INSTALLED WITHIN 15 FEET OF ENTRANCE OF ANY SLEEPING ROOM WALL OR CEILING MOUNTED AND INDICATED ON PLANS AS PER NFPA # 74-1980.

4. A CERTIFICATE OF SATISFACTORY INSTALLATION SHALL BE FILED WITH THE DIVISION OF CODE ENFORCEMENT 10 DAYS AFTER THE INSTALLATION IS COMPLETED.

ENERGY CONSERVATION NOTE:

TO THE BEST OF MY KNOWLEDGE, BELIEF AND PROFESSIONAL JUDGMENT, THESE PLANS AND SPECIFICATIONS ARE IN COMPLIANCE WITH THE ENERGY CONSERVATION CONSTRUCTION CODE OF NEW YORK STATE 2014.



11 PARK PLACE SUITE 817
NEW YORK, NY 10007
PHONE: 212-832-7566

190 EAST MAIN STREET
HUNTINGTON, NY 11743
PHONE: 631-424-8480 FAX: 631-547-4193

PROJECT

ALT. 2
198 RANDOLPH STREET


198 RANDOLPH STREET
BROOKLYN, N.Y. 11237

MEP ENGINEER
NAME: BENJAMIN KLEIN
ADDRESS: 1839 OCEAN PARKWAY
CITY: BROOKLYN
STATE: NEW YORK
ZIP: 11223
TEL: 718-998-0860
E-MAIL: BKLEIN@MEPDESIGNS.NET

STRUCTURAL ENGINEER
NAME: NWEKLER ASSOCIATES
ADDRESS: 12 WEST 32ND STREET
CITY: NEW YORK
STATE: NEW YORK
ZIP: 10001
TEL: 212-643-1500
E-MAIL: NWEKLER@NWEKLER.COM

SPECIAL INSPECTOR:
NAME:
ADDRESS:
CITY:
STATE:
ZIP:
TEL:
E-MAIL:

REVISIONS:

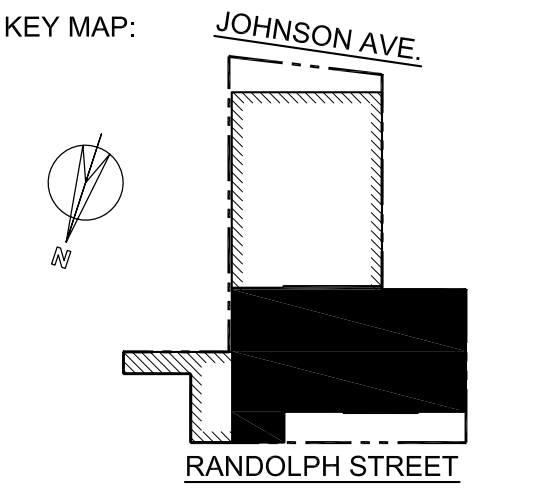

DOB B-SCAN

DRAWING TITLE / INFORMATION:

GENERAL NOTES,
LIST OF REQUIRED
INSPECTIONS

SEAL & SIGNATURE:

DATE: 07-13-2016
DWG No.:

G-001.00

BUILDING CODE ANALYSIS

(BCA...continued)

APPLICABLE CODES
2014 NYC BUILDING CODE
2014 NYC MECHANICAL CODE
2014 NYC PLUMBING CODE
2014 NYC FIRE CODE
2014 NYC ELECTRICAL CODE
NEW YORK CITY ENERGY CONSERVATION CODE

USE AND OCCUPANCY CLASSIFICATION

COMMERCIAL	A-2
COMMUNITY FACILITY	B
STORAGE	S-2
UTILITY	U
BUILDING CONSTRUCTION CLASS	
TYPE	IB
R-2	UNLIMITED
A-2	UNLIMITED

FIRE PROTECTION
BUILDING TO BE FULLY SPRINKLERED PER BC 903

FIRE RESISTANCE RATING REQUIREMENTS PER TABLE 601

BUILDING ELEMENTS	RATING (HOURS)
STRUCTURAL FRAME	2
(incl. columns, girders, trusses)	
BEARING WALLS	
EXTERIOR	2
INTERIOR	2
NONBEARING WALLS	
EXTERIOR	TABLE 602
INTERIOR	0
FLOOR CONSTRUCTION	2
(incl. supporting beams and joists)	
ROOF CONSTRUCTION	1
(incl. supporting beams and joists)	

FIRE RESISTANCE RATING REQUIREMENTS PER TABLE 602

FIRE SEPARATION	CONSTRUCTION	OCC
DISTANCE	TYPE	GROUP A-2
<5'	ALL	2
>5' to <10'	IA	2
	OTHERS	1
>10' to <30'	IA, IB	1
	IIB, VB	0
	OTHERS	1
>30'	ALL	0

MAXIMUM FLOOR AREA ALLOWANCES PER TABLE 1004.1.2

USE OF SPACE	SF PER OCCUPANT
ASSEMBLY	
DANCE FLOOR	5 NET
STANDING SPACE	5 NET
UNCONCENTRATED (TABLES AND CHAIRS)	15 NET
ACCESSORY STORAGE AREAS, MECH. EQUIP. RM.	300 GROSS
KITCHEN, COMMERCIAL	200 GROSS
BUSINESS AREAS	100 GROSS

OCCUPANT COUNTS FOR (A-2) USE

FLOOR LEVEL AREA	OCCUPANCY
FIRST FLOOR (STORAGE ROOM 01) - 162 sf	1
FIRST FLOOR (STORAGE ROOM 02) - 337 sf	1
FIRST FLOOR (EQUIPMENT / STORAGE ROOM) - 131 sf	1
FIRST FLOOR (MAIN ROOM 01) - 1,140 sf	76
FIRST FLOOR (MAIN ROOM 02) - 979 sf	196
FIRST FLOOR (MAIN ROOM 03) - 3,338 sf	668
FIRST FLOOR (COMMON AREA) - 326 sf	65
FIRST FLOOR (TICKET LOBBY) - 576 sf	52
FIRST FLOOR (TICKET/COAT WINDOWS) - 493 sf	5
FIRST FLOOR (KITCHEN) - 417 sf	2
FIRST FLOOR (BAR SPACE) - 2,227 sf	445
FIRST FLOOR (GREEN ROOM 01) - 162 sf	11
FIRST FLOOR (GREEN ROOM 02) - 329 SF	22
MEZZANINE (OFFICE) - 614 sf	6
MEZZANINE (VIP AREA) - 1,396 sf	93
MEZZANINE (SOUND BOOTH) - 129 sf	1
MEZZANINE (STORAGE ROOM) - 856 sf	3
TOTAL =	1,648 PERSONS

EGRESS WIDTH PER OCCUPANT SERVED PER SECTION 1005.1

OCCUPANCY	STAIRWAY	OTHER
M, R,	0.3	0.2

EXIT ACCESS TRAVEL DISTANCE PER TABLE 1015.1

OCCUPANCY	NON-SPRINKLERED	SPRINKLERED
M	150'	200'
R	150'	200'


EGRESS CALCULATIONS

FIRST FLOOR


EXIT	STAIR	STAIR	CLEAR	DOOR	EXIT	ACTUAL
	WIDTH (in.)	CAPACITY	DOOR WIDTH	CAPACITY	CAPACITY	OCCUP.
EXIT #1	N/A	N/A	180"	900	900	440
EXIT #2	N/A	N/A	144"	720	720	441
EXIT #3	N/A	N/A	180"	900	900	440
EXIT #4	N/A	N/A	216"	1080	1080	441
TOTALS	N/A	N/A	720"	3600	3600	1762

MEZZANINE LEVEL

EXIT	STAIR	STAIR	CLEAR	DOOR	EXIT	ACTUAL
	WIDTH (IN.)	CAPACITY	DOOR WIDTH	CAPACITY	CAPACITY	OCCUP.
EXIT #1	44"	146	36"	180	146	133
EXIT #2	44"	146	180"	900	146	134
TOTALS	88"	292	216"	1080	292	267

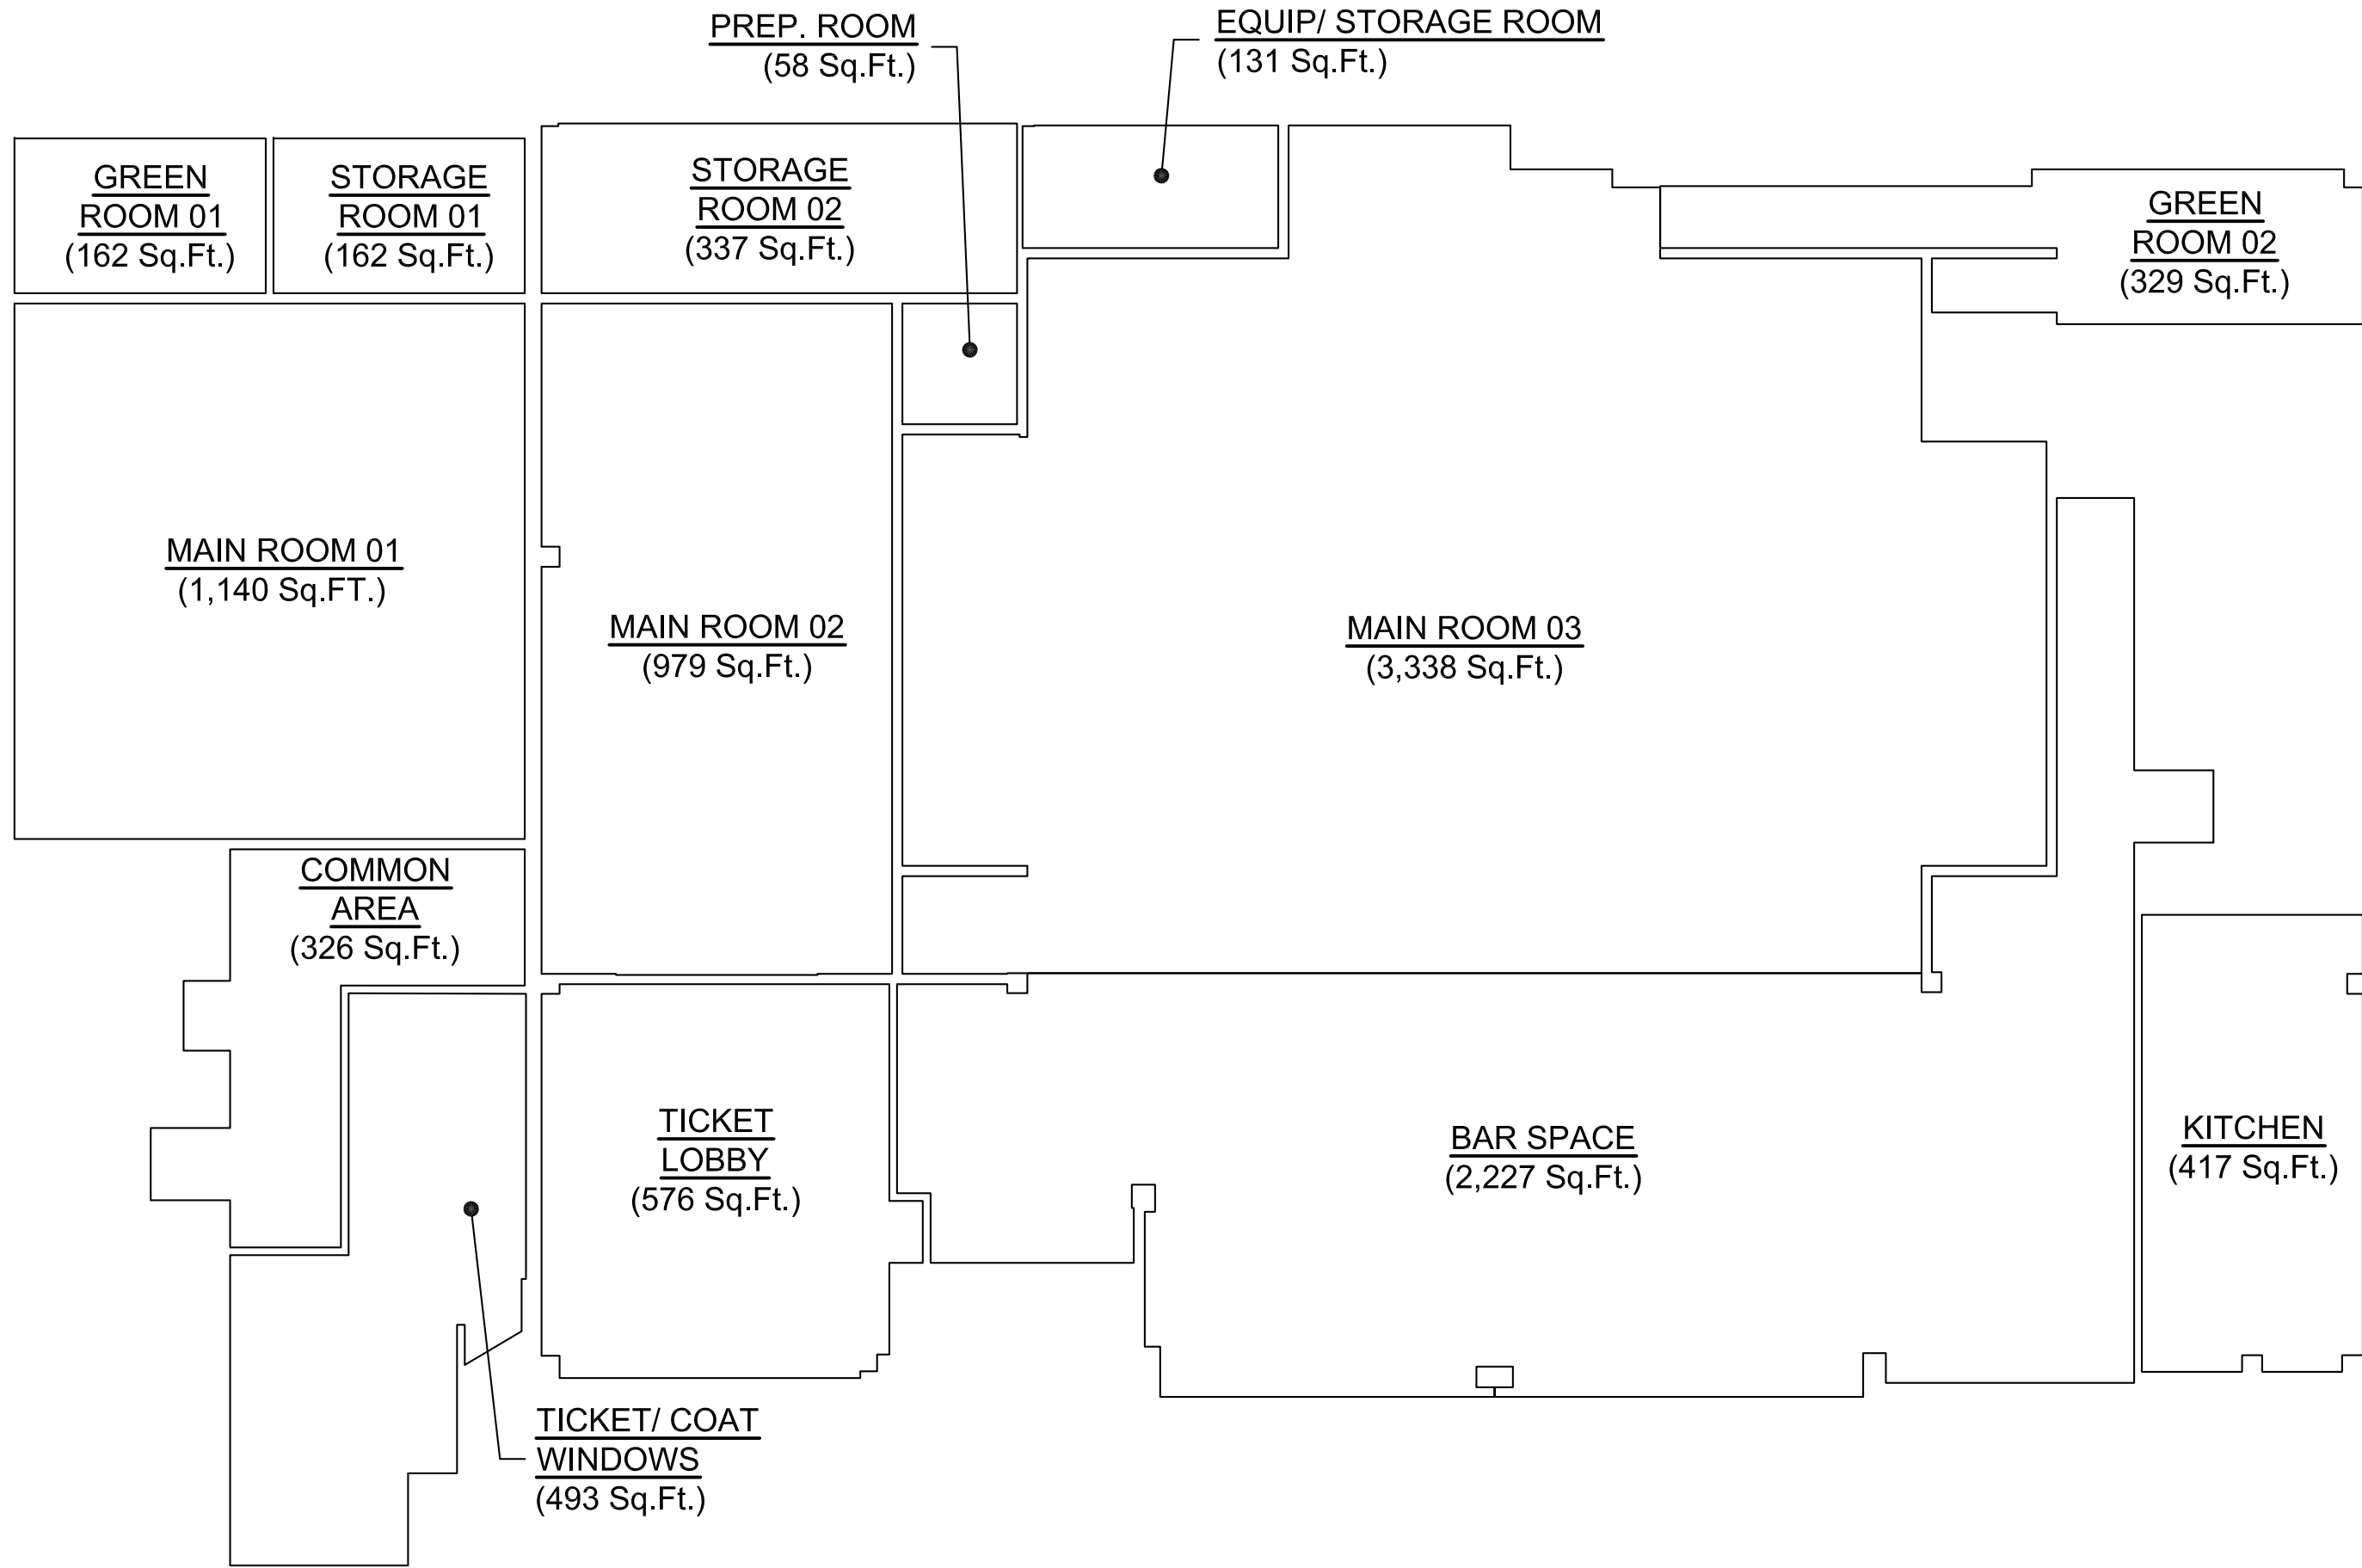

1 PROPOSED 1ST FLOOR PLAN
SCALE: 3/32" = 1'-0"

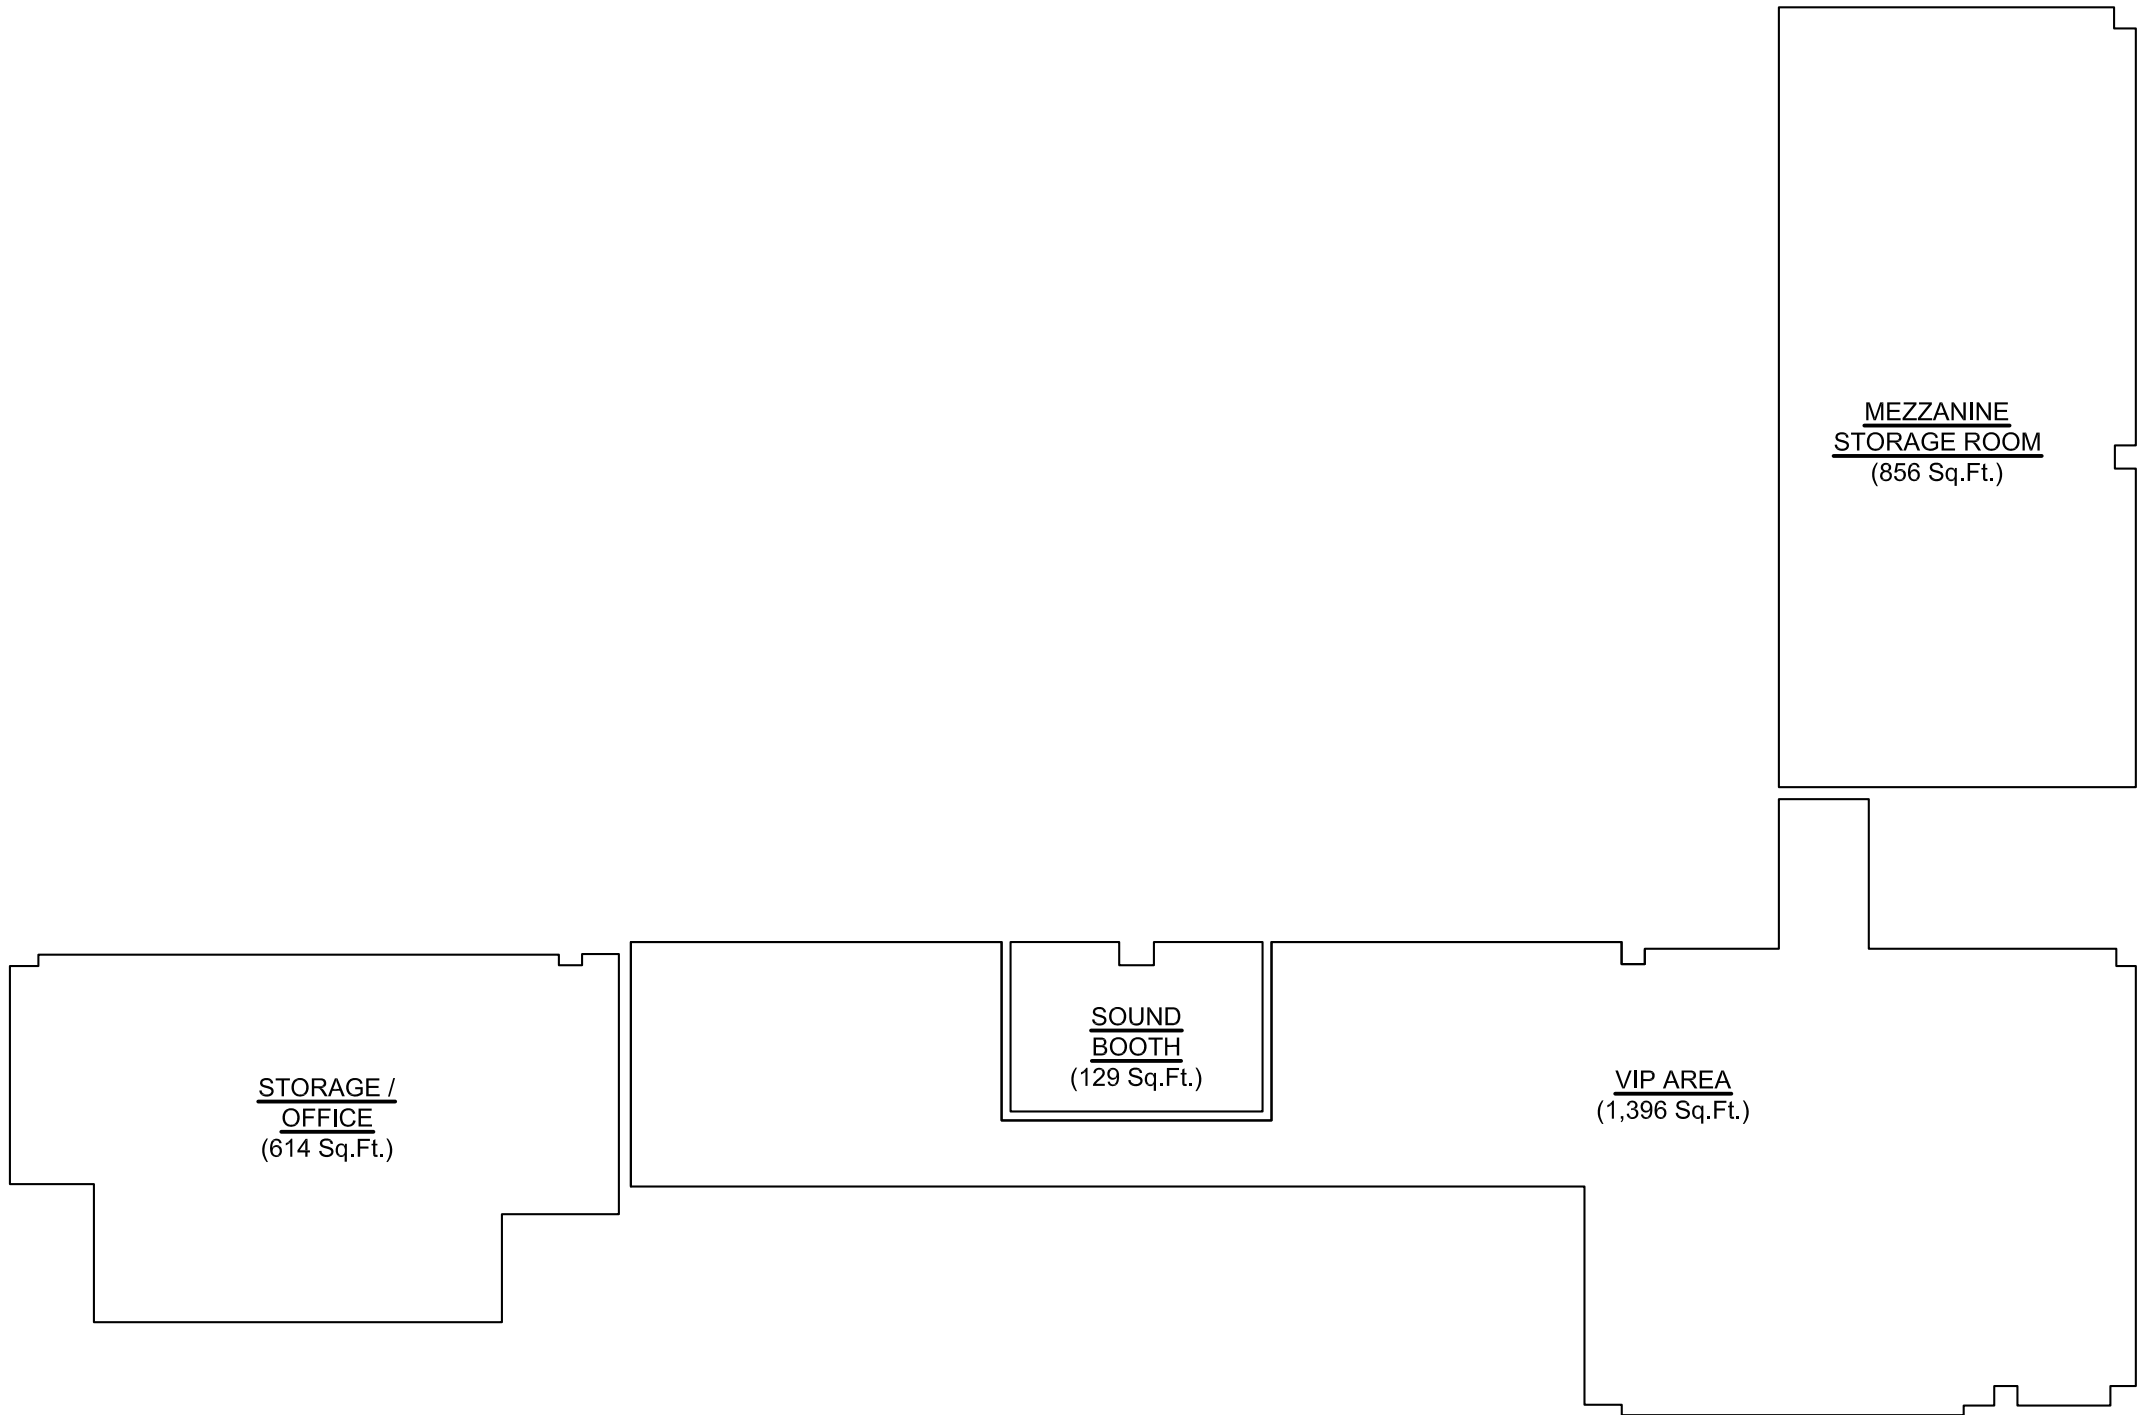

2 PROPOSED MEZZANINE PLAN
SCALE: 3/32" = 1'-0"



11 PARK PLACE SUITE 817
NEW YORK, NY 10007
PHONE: 212-632-7566

190 EAST MAIN STREET
HUNTINGTON, NY 11743
PHONE: 631-424-8469 FAX: 631-947-4193

PROJECT

ALT. 2
198 RANDOLPH STREET


198 RANDOLPH STREET
BROOKLYN, N.Y. 11237

MEP ENGINEER
NAME: BENJAMIN KLEIN
ADDRESS: 1839 OCEAN PARKWAY
CITY: BROOKLYN
STATE: NEW YORK
ZIP: 11223
TEL: 718-998-0660
E-MAIL: BKLEIN@MEPDESIGNS.NET

STRUCTURAL ENGINEER
NAME: WEXLER ASSOCIATES
ADDRESS: 12 WEST 32ND STREET
CITY: NEW YORK
STATE: NEW YORK
ZIP: 10001
TEL: 212-643-1500
E-MAIL: NWEXLER@NWEXLER.COM

SPECIAL INSPECTOR:
NAME:
ADDRESS:
CITY:
STATE:
ZIP:
TEL:
E-MAIL:

REVISIONS:

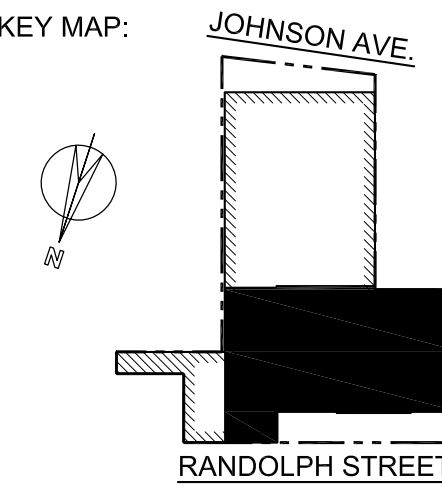

DOB B-SCAN

DRAWING TITLE / INFORMATION:

CODE ANALYSIS

SEAL & SIGNATURE:

DATE: 07-13-2016
DWG No.:

G-100.00

ALT. 2
198 RANDOLPH
STREET


198 RANDOLPH STREET
BROOKLYN, N.Y. 11237

MEP ENGINEER
NAME: BENJAMIN KLEIN
ADDRESS: 1839 OCEAN PARKWAY
CITY: BROOKLYN
STATE: NEW YORK
ZIP: 11223
TEL: 718-998-0660
E-MAIL: BKLEIN@MEPDESIGNS.NET

STRUCTURAL ENGINEER
NAME: WEXLER ASSOCIATES
ADDRESS: 12 WEST 32ND STREET
CITY: NEW YORK
STATE: NEW YORK
ZIP: 10001
TEL: 212-643-1500
E-MAIL: NWEXLER@NWEXLER.COM

SPECIAL INSPECTOR:
NAME:
ADDRESS:
CITY:
STATE:
ZIP:
TEL:
E-MAIL:

REVISIONS:

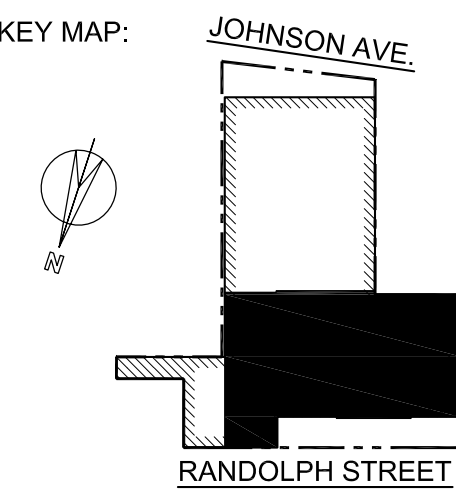

DOB B-SCAN

DRAWING TITLE / INFORMATION:


EXISTING
/DEMO
1ST FLOOR PLAN

SEAL & SIGNATURE:

DATE: 07-13-2016
DWG No.:



A-100.00


SHEET 04 OF 10

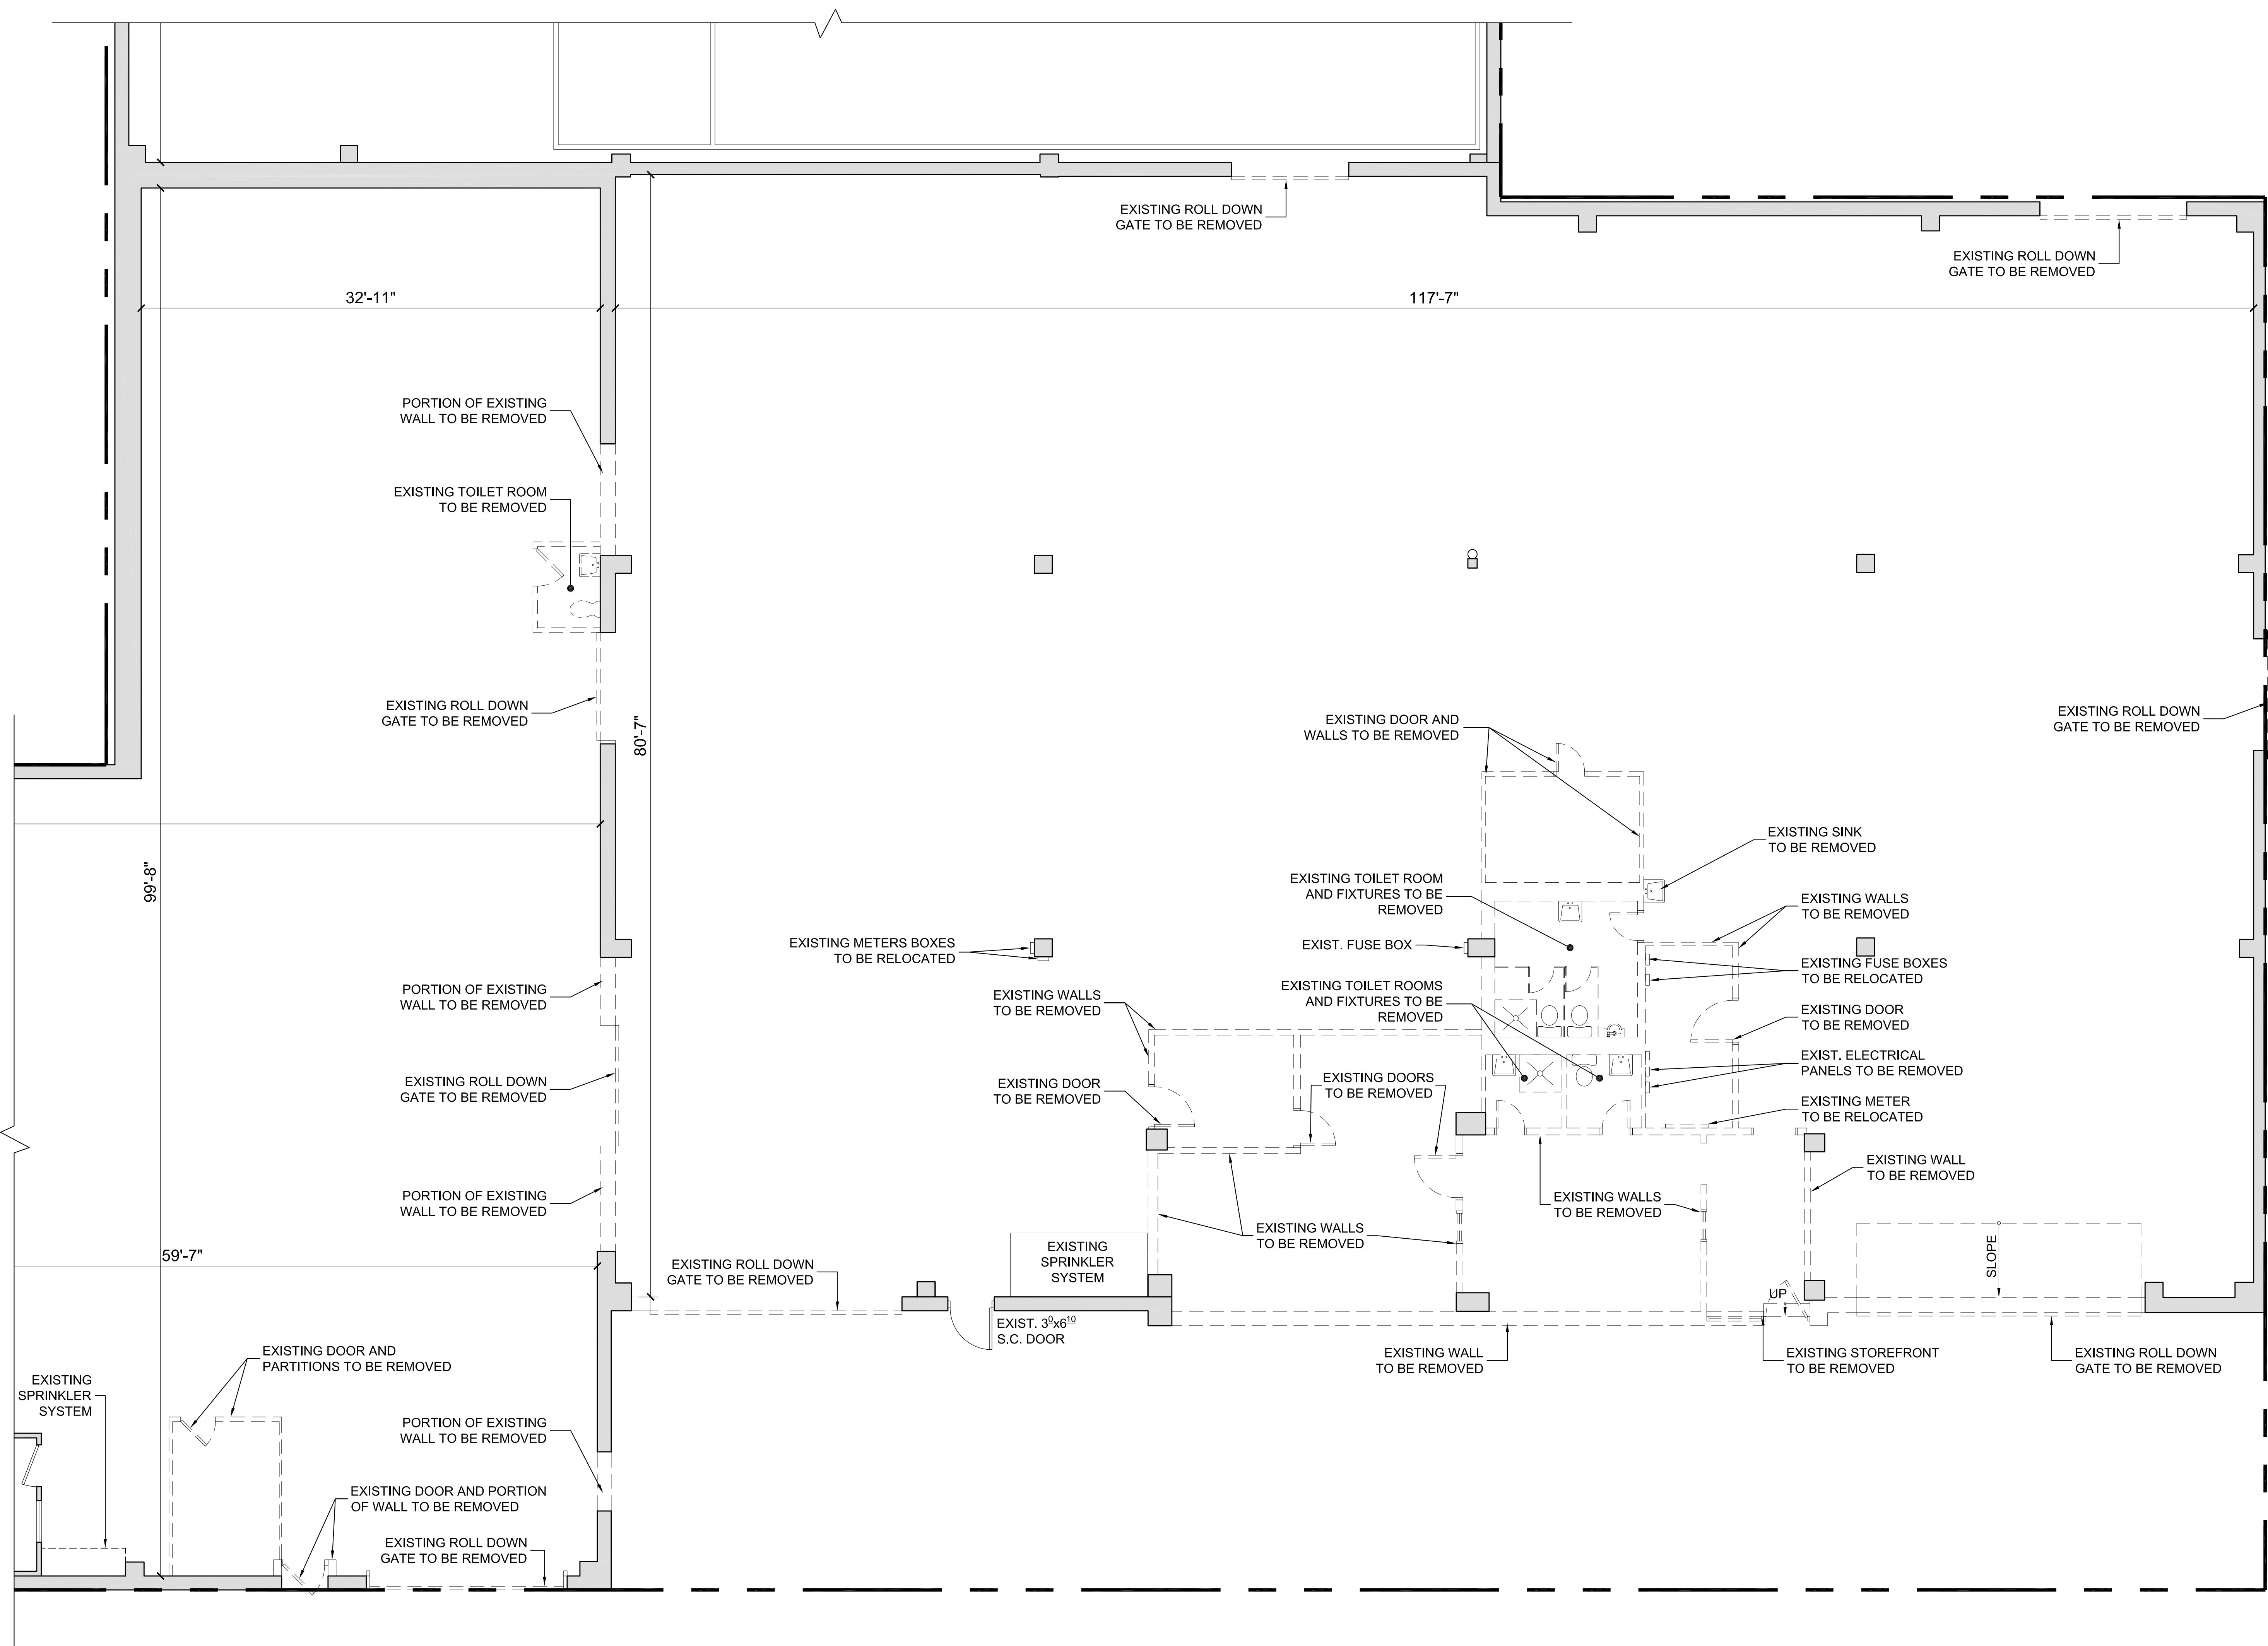

1 EXISTING / DEMO 1ST FLOOR PLAN
SCALE: 3/16" = 1'-0"

RANDOLPH STREET

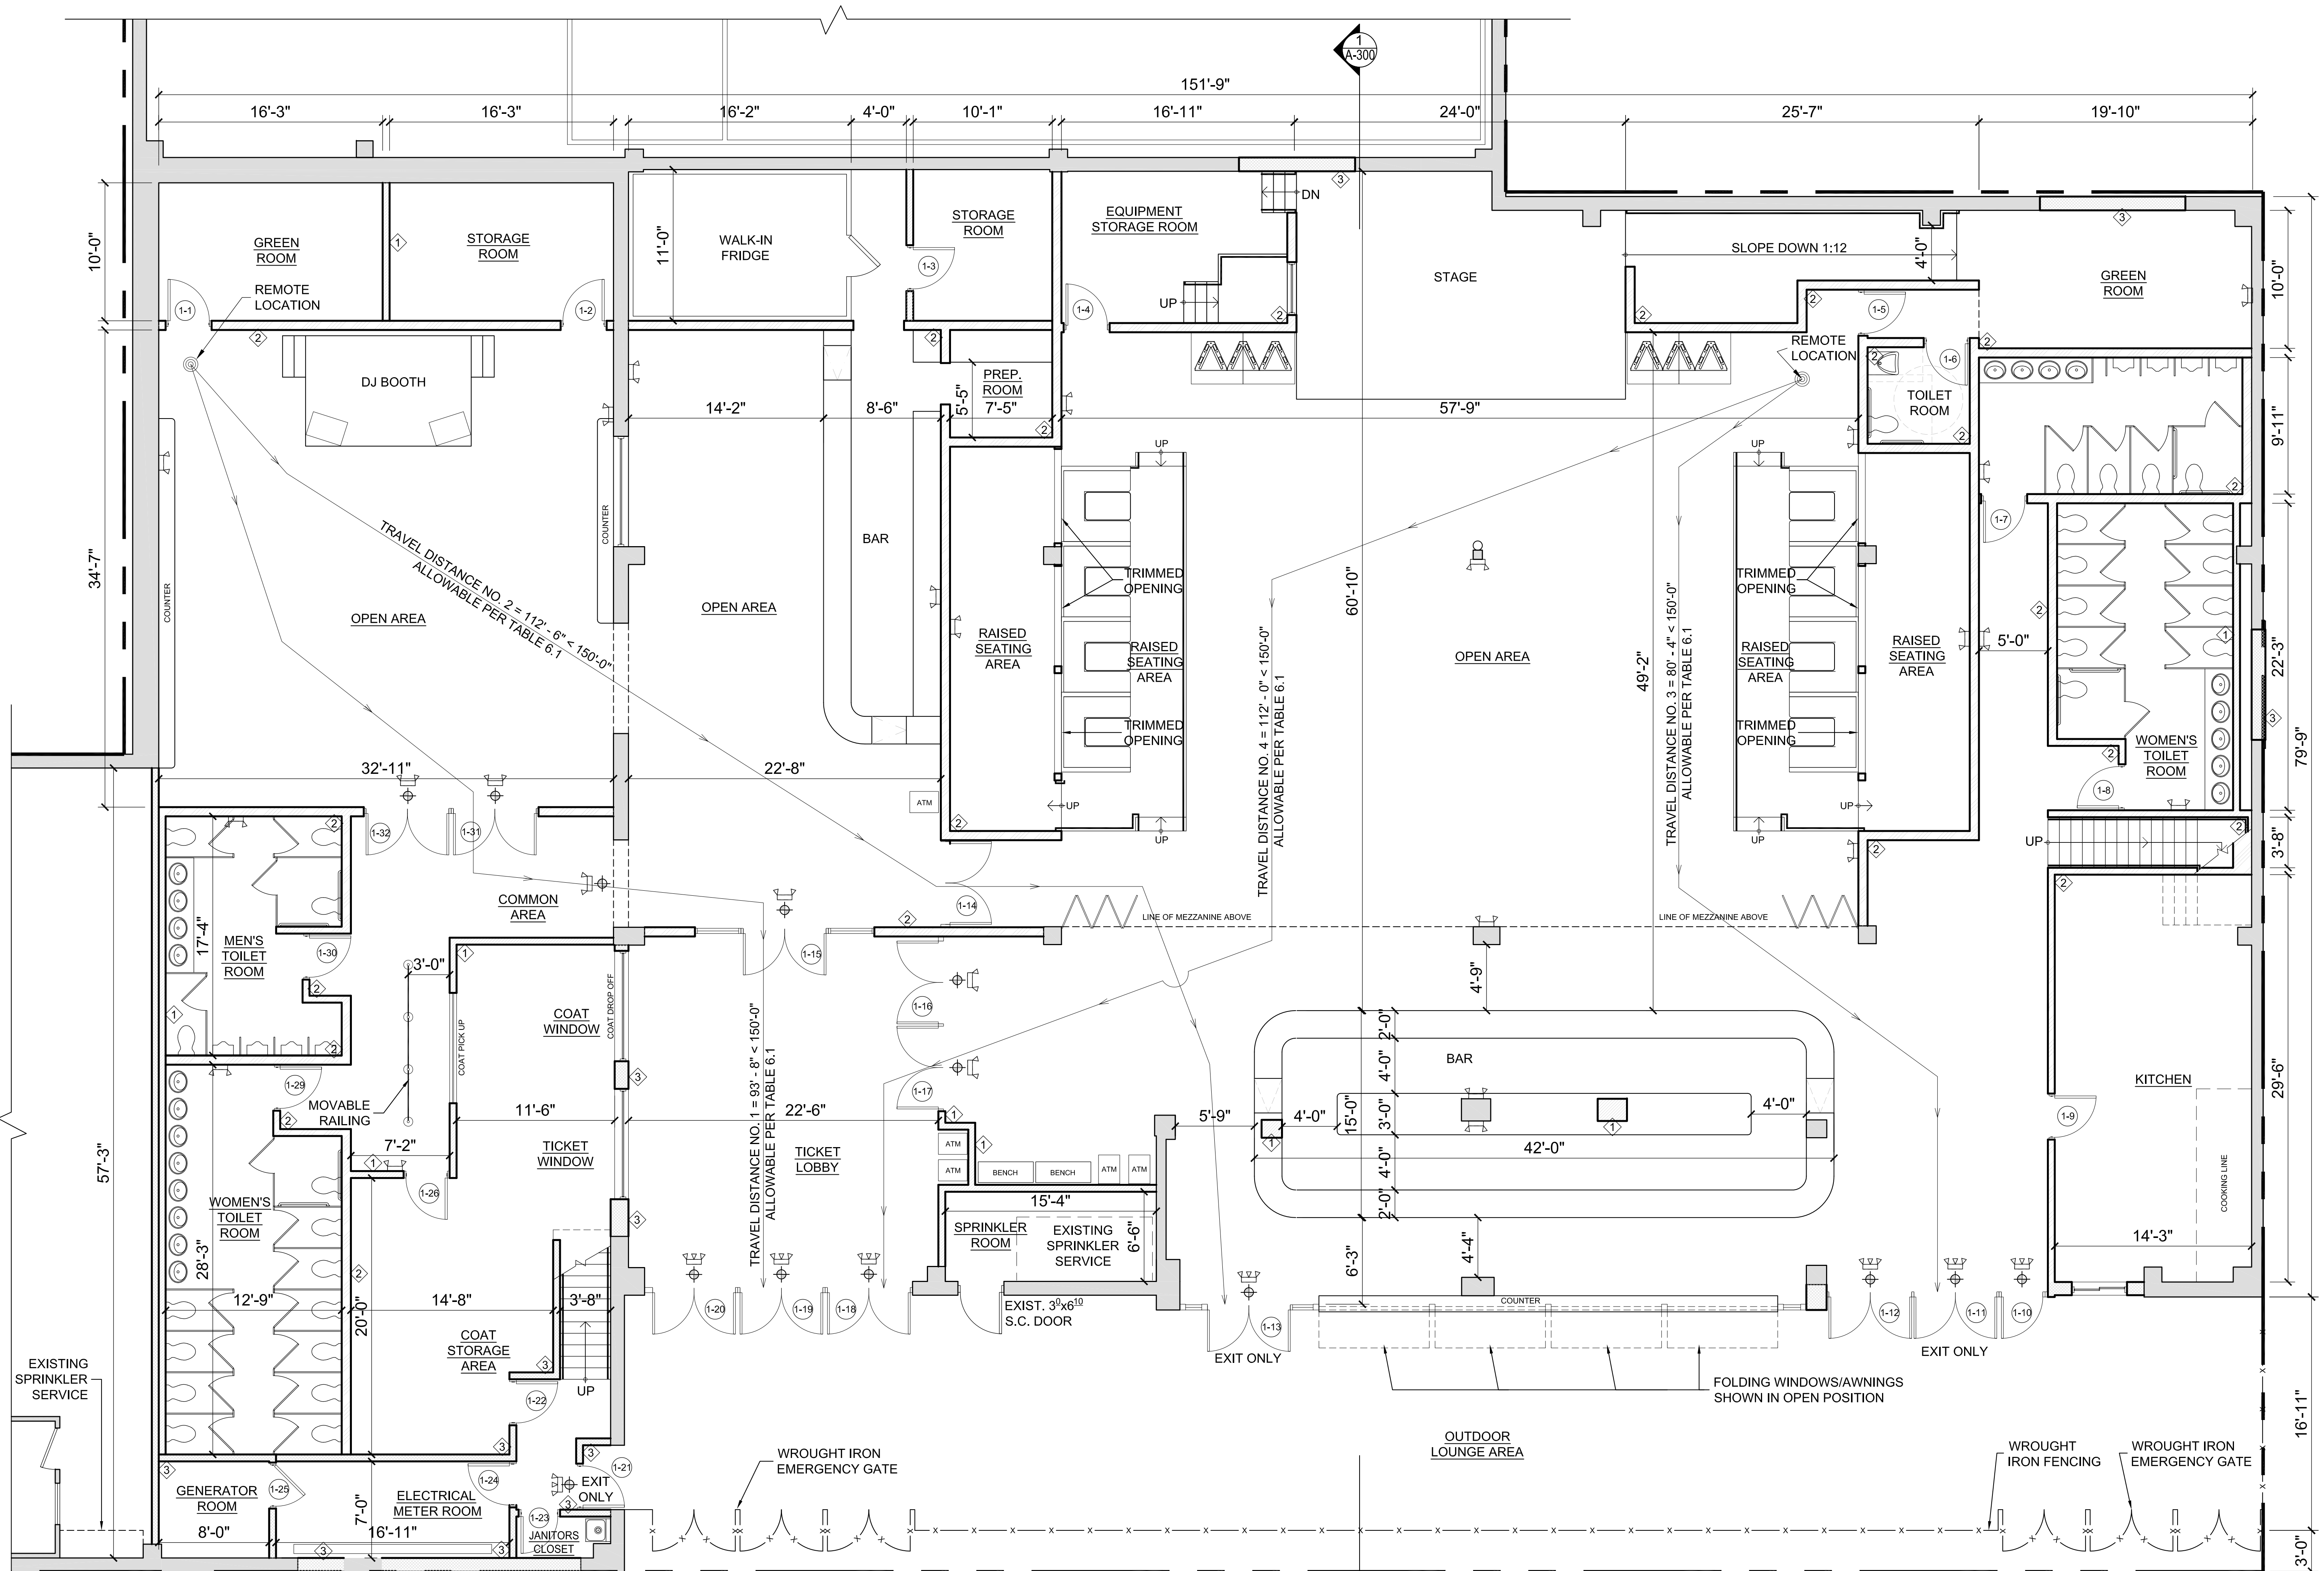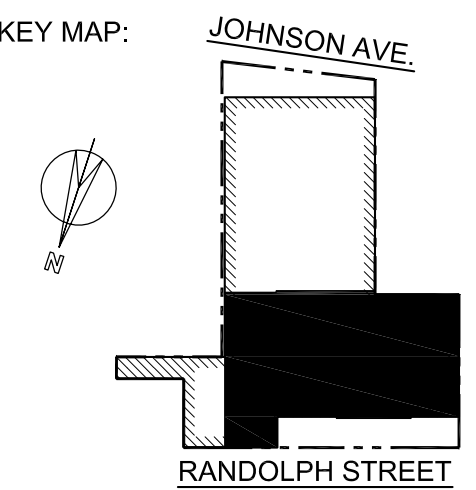

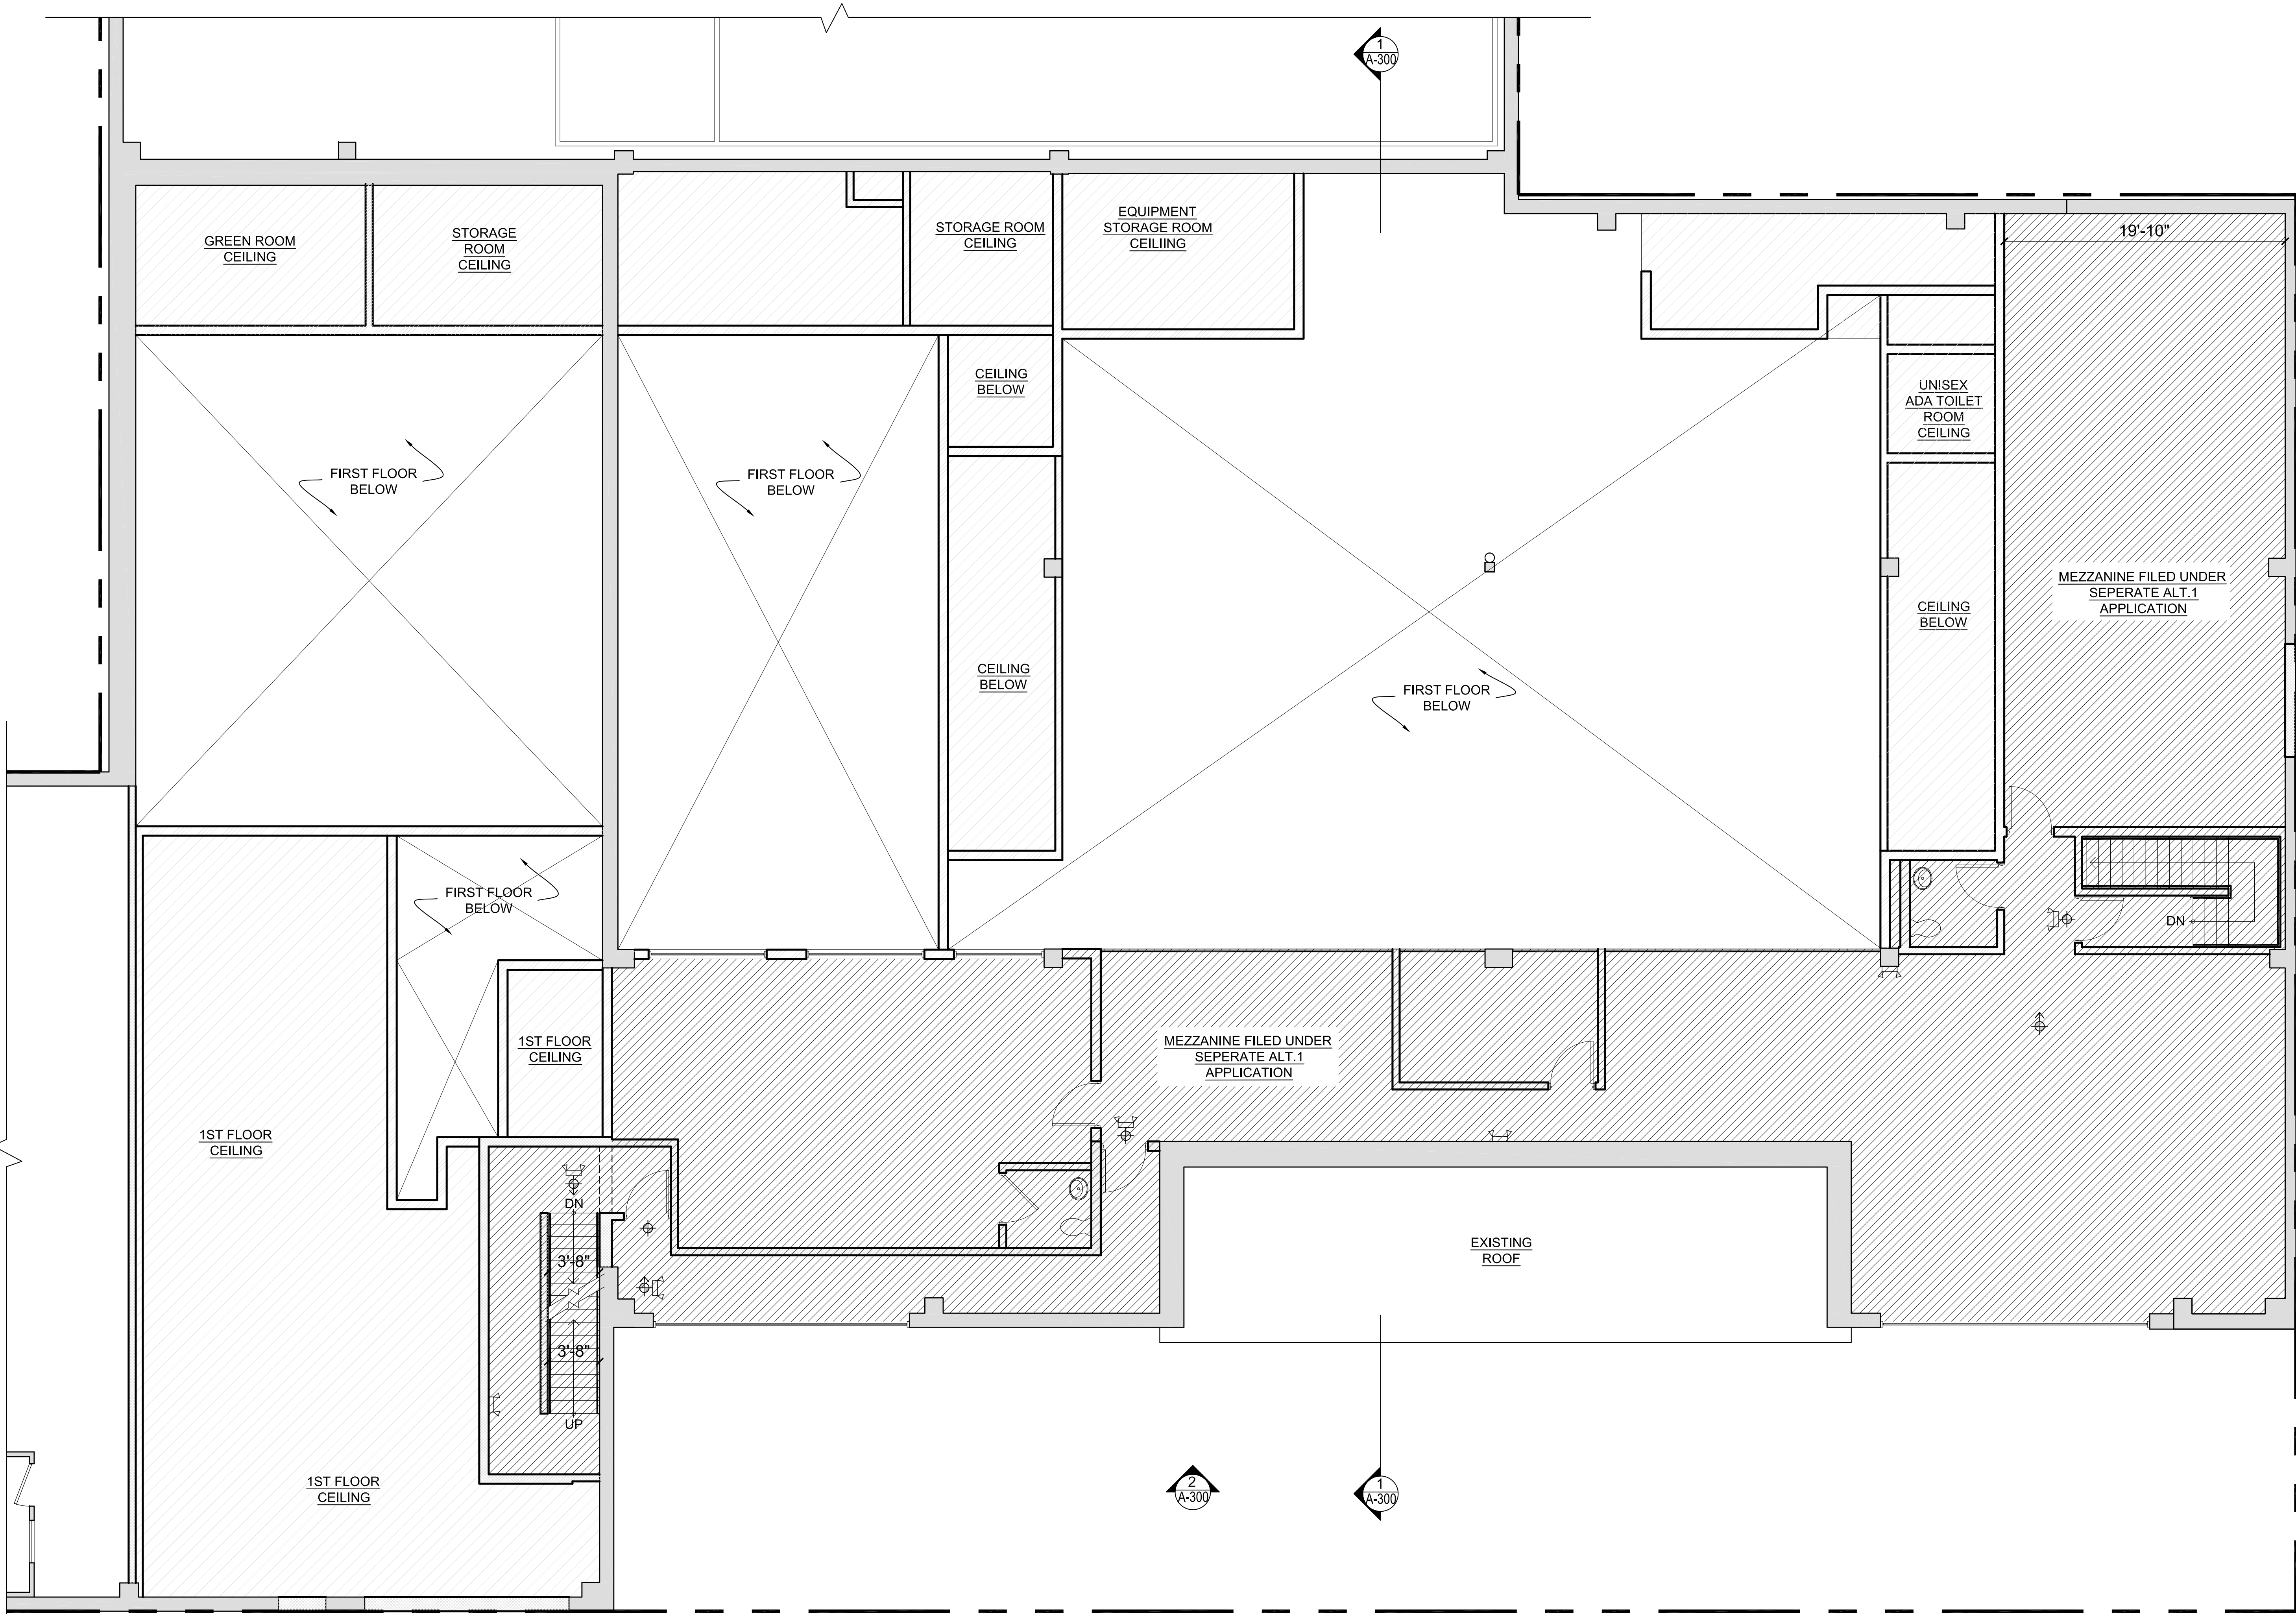

1 PROPOSED MEZZANINE PLAN
SCALE: 3/16" = 1'-0"

RANDOLPH STREET

NOTE:
A PLACE OF ASSEMBLY (PA) TO BE FILED SEPARATELY.

swaarchitecture

11 PARK PLACE SUITE 817
NEW YORK, NY 10007
PHONE: 212-632-7566

190 EAST MAIN STREET
HUNTINGTON, NY 11743
PHONE: 631-424-9493 FAX: 631-947-4193

PROJECT

ALT. 2
198 RANDOLPH STREET

198 RANDOLPH STREET
BROOKLYN, N.Y. 11237

MEP ENGINEER
NAME: BENJAMIN KLEIN
ADDRESS: 1839 OCEAN PARKWAY
CITY: BROOKLYN
STATE: NEW YORK
ZIP: 11223
TEL: 718-998-0660
E-MAIL: BKLEIN@MEPDESIGNS.NET

STRUCTURAL ENGINEER
NAME: WEXLER ASSOCIATES
ADDRESS: 12 WEST 32ND STREET
CITY: NEW YORK
STATE: NEW YORK
ZIP: 10001
TEL: 212-643-1500
E-MAIL: NWEXLER@NWEXLER.COM

SPECIAL INSPECTOR:
NAME:
ADDRESS:
CITY:
STATE:
ZIP:
TEL:
E-MAIL:

REVISIONS:

KEY MAP:

JOHNSON AVE.
RANDOLPH STREET


DOB B-SCAN

DRAWING TITLE / INFORMATION:
PROPOSED MEZZANINE PLAN

SEAL & SIGNATURE:

DATE: 07-13-2016
DWG No.: A-201.00

SHEET 06 OF 10

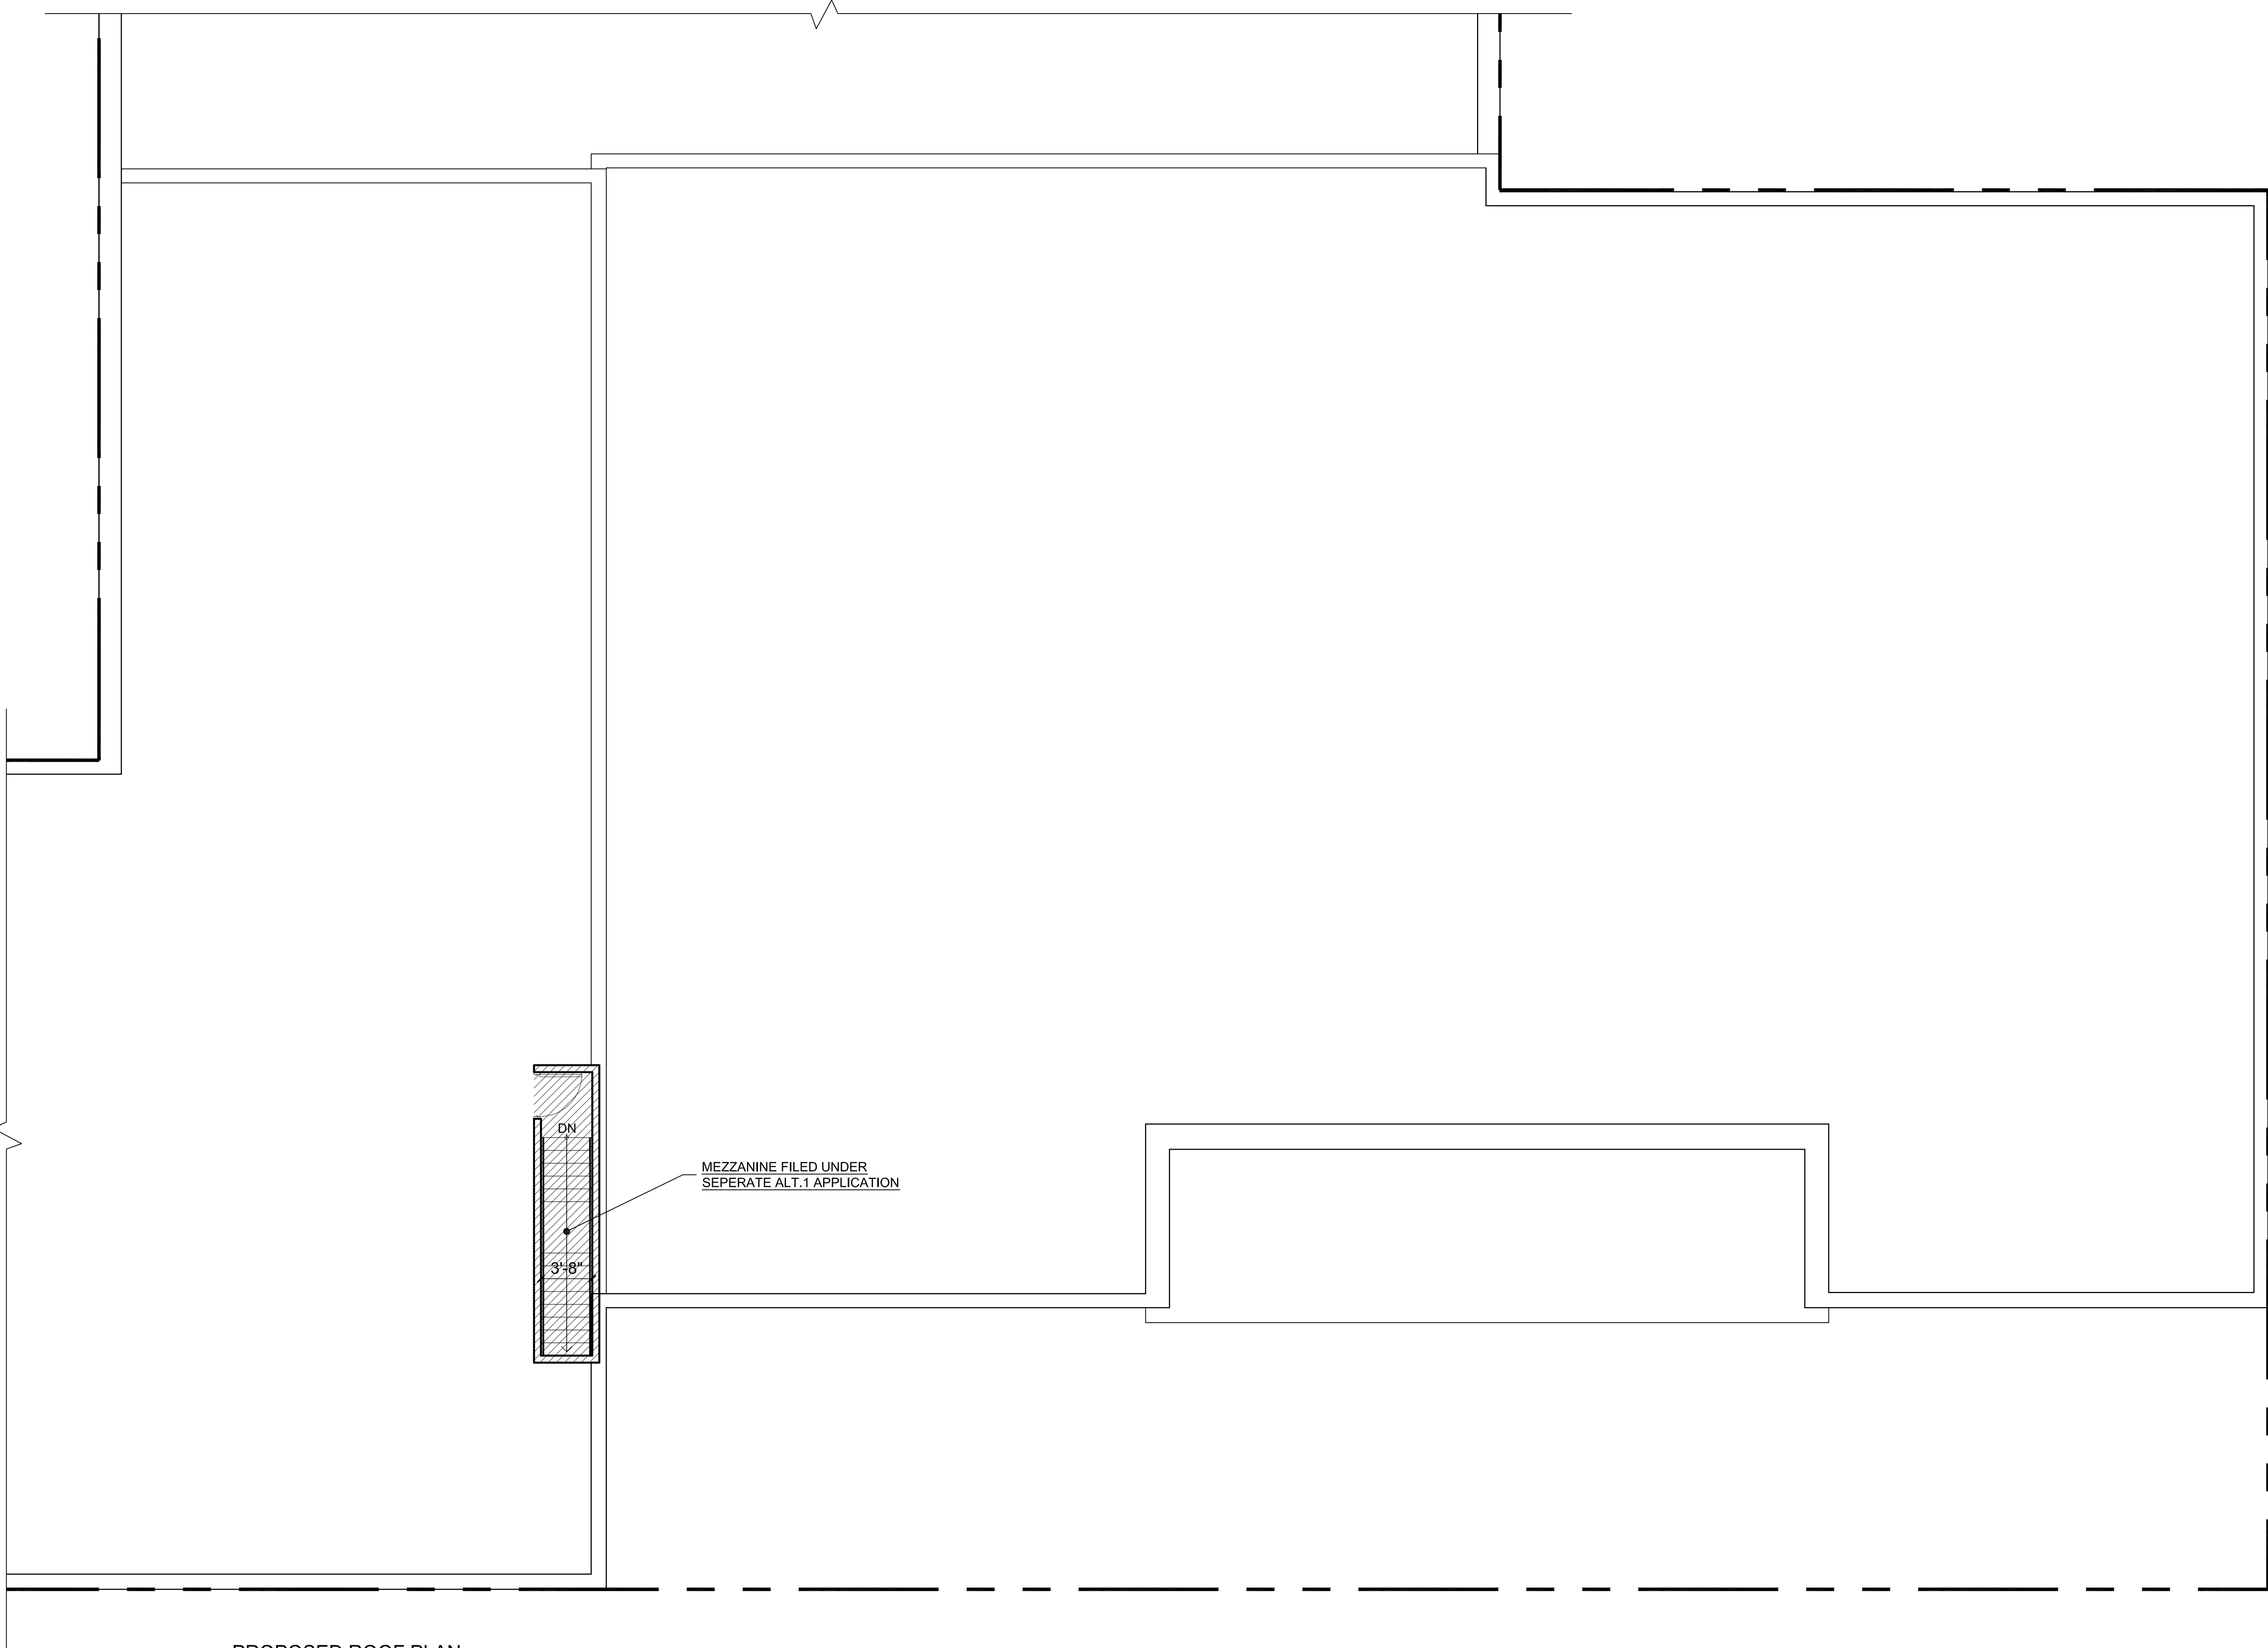

1 PROPOSED ROOF PLAN
SCALE: 3/16" = 1'-0"

RANDOLPH STREET



11 PARK PLACE SUITE 817
NEW YORK, NY 10007
PHONE: 212-832-7566

190 EAST MAIN STREET
HUNTINGTON, NY 11743
PHONE: 631-424-8480 FAX: 631-547-4193

PROJECT

ALT. 2
198 RANDOLPH STREET


198 RANDOLPH STREET
BROOKLYN, N.Y. 11237

MEP ENGINEER
NAME: BENJAMIN KLEIN
ADDRESS: 1839 OCEAN PARKWAY
CITY: BROOKLYN
STATE: NEW YORK
ZIP: 11223
TEL: 718-998-0660
E-MAIL: BKLEIN@MEPDESIGNS.NET

STRUCTURAL ENGINEER
NAME: WEXLER ASSOCIATES
ADDRESS: 12 WEST 32ND STREET
CITY: NEW YORK
STATE: NEW YORK
ZIP: 10001
TEL: 212-643-1500
E-MAIL: NWEXLER@NWEXLER.COM

SPECIAL INSPECTOR:
NAME:
ADDRESS:
CITY:
STATE:
ZIP:
TEL:
E-MAIL:

REVISIONS:

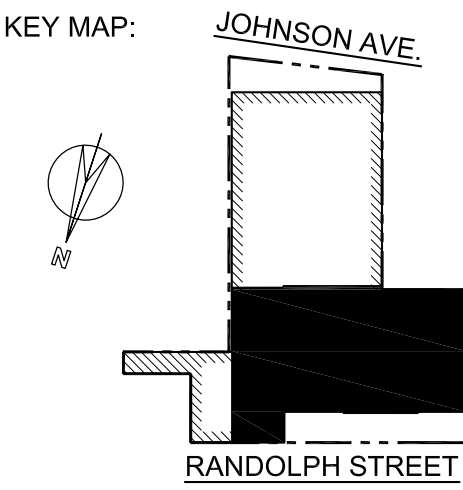

DOB B-SCAN

PROPOSED
ROOF
PLAN

SEAL & SIGNATURE:

DATE: 07-13-2016
DWG No.:

A-202.00

ALT. 2
198 RANDOLPH
STREET


198 RANDOLPH STREET
BROOKLYN, N.Y. 11237

MEP ENGINEER
NAME: BENJAMIN KLEIN
ADDRESS: 1839 OCEAN PARKWAY
CITY: BROOKLYN
STATE: NEW YORK
ZIP: 11223
TEL: 718-998-0660
E-MAIL: BKLEIN@MEPDESIGNS.NET

STRUCTURAL ENGINEER
NAME: WEXLER ASSOCIATES
ADDRESS: 12 WEST 32ND STREET
CITY: NEW YORK
STATE: NEW YORK
ZIP: 10001
TEL: 212-643-1500
E-MAIL: NWEXLER@NWEXLER.COM

SPECIAL INSPECTOR:
NAME:
ADDRESS:
CITY:
STATE:
ZIP:
TEL:
E-MAIL:

REVISIONS:

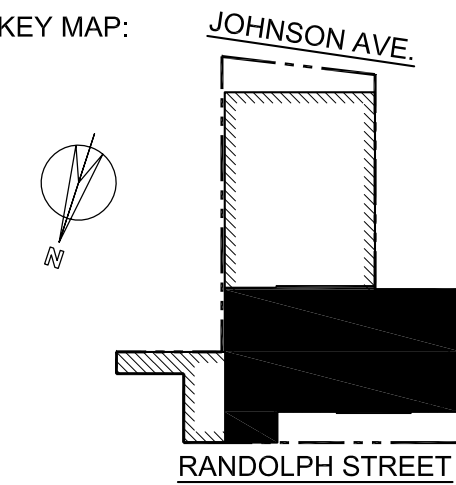

DOB B-SCAN

DRAWING TITLE / INFORMATION:


EXISTING
ELEVATION AND
PROPOSED
SECTION &
ELEVATION

SEAL & SIGNATURE:


DATE: 07-13-2016
DWG No.:

A-300.00


SHEET 08 OF 10

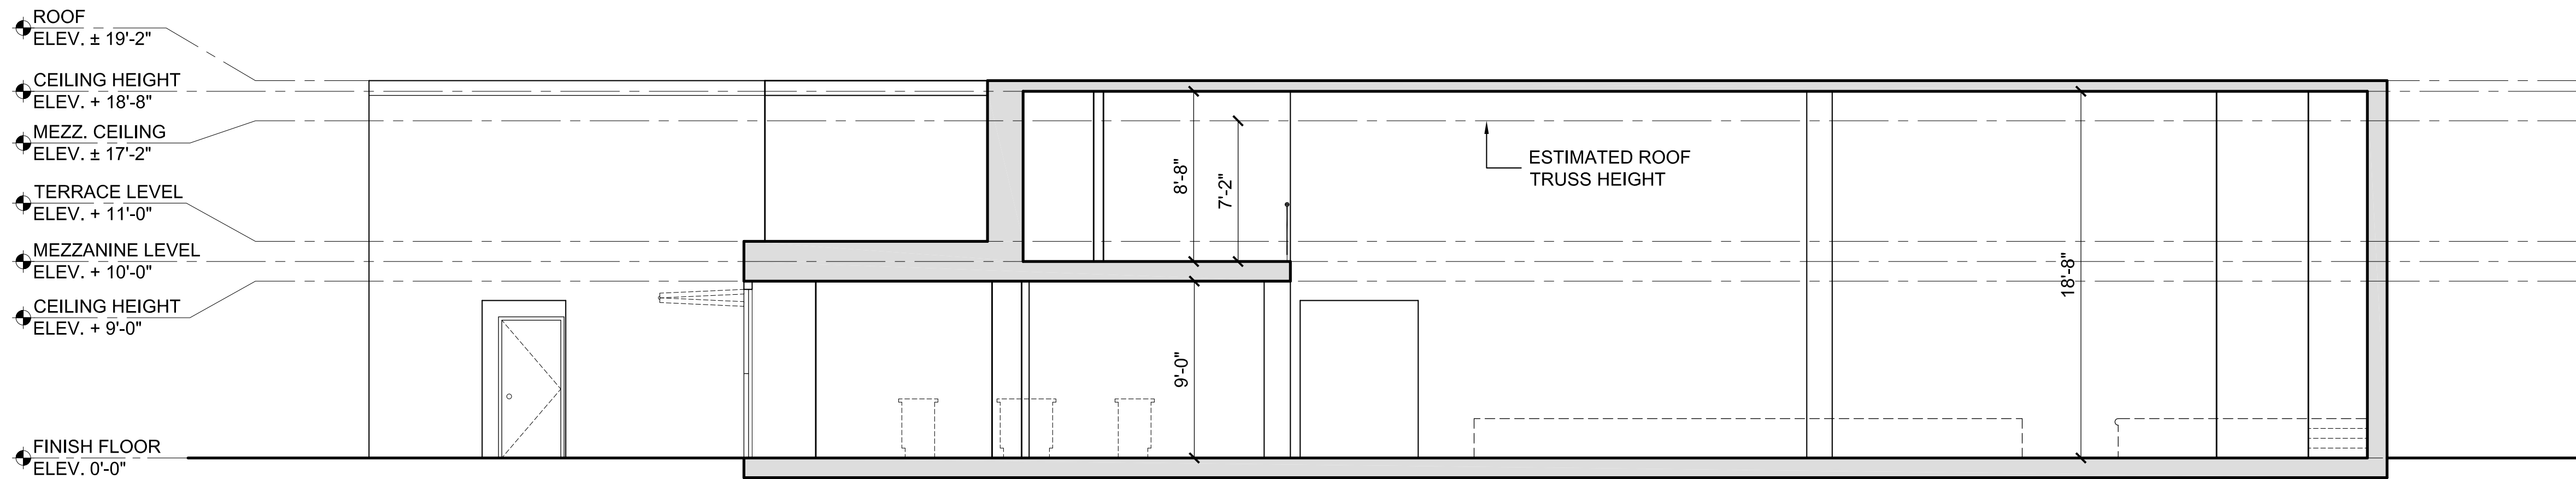

1 PROPOSED SECTION
SCALE: 3/16" = 1'-0"

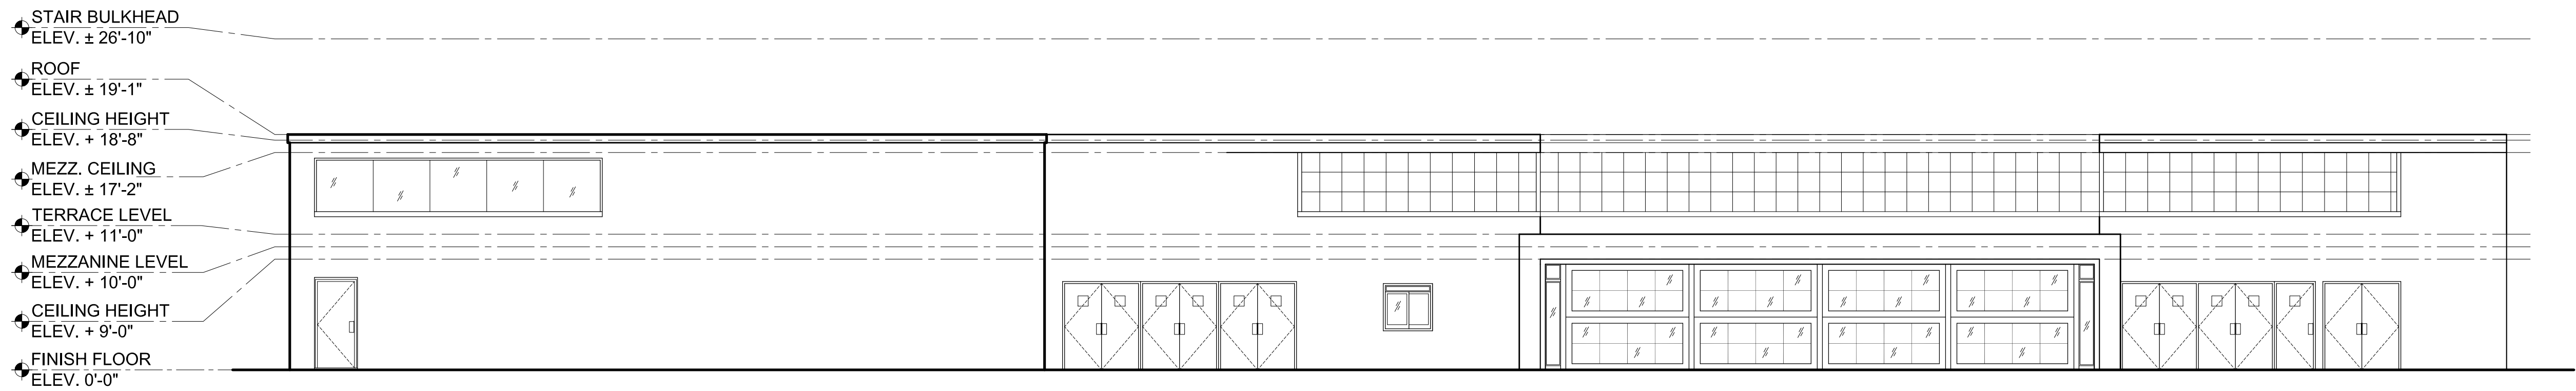

2 PROPOSED ELEVATION - RANDOLPH STREET
SCALE: 1/8" = 1'-0"

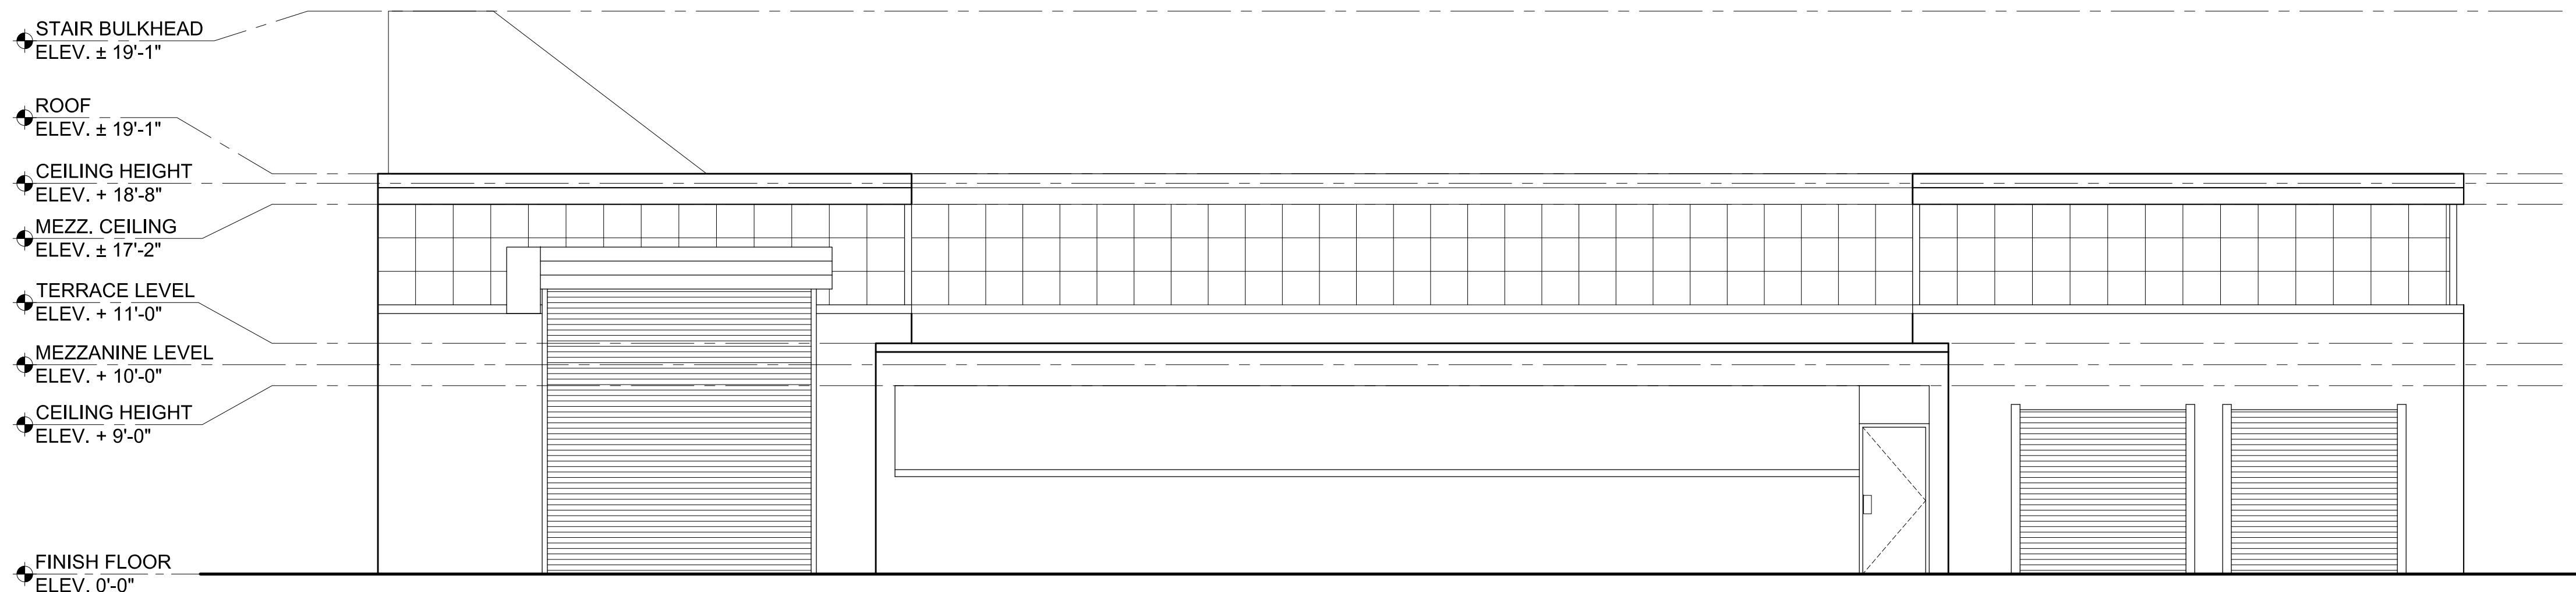

3 EXISTING ELEVATION - JOHNSON AVENUE
SCALE: 3/16" = 1'-0"

ALT. 2
198 RANDOLPH STREET


198 RANDOLPH STREET
BROOKLYN, N.Y. 11237

MEP ENGINEER
NAME: BENJAMIN KLEIN
ADDRESS: 1839 OCEAN PARKWAY
CITY: BROOKLYN
STATE: NEW YORK
ZIP: 11223
TEL: 718-998-0660
E-MAIL: BKLEIN@MEPDESIGNS.NET

STRUCTURAL ENGINEER
NAME: WEXLER ASSOCIATES
ADDRESS: 12 WEST 32ND STREET
CITY: NEW YORK
STATE: NEW YORK
ZIP: 10001
TEL: 212-643-1500
E-MAIL: NWEXLER@NWEXLER.COM

SPECIAL INSPECTOR:
NAME:
ADDRESS:
CITY:
STATE:
ZIP:
TEL:
E-MAIL:

REVISIONS:

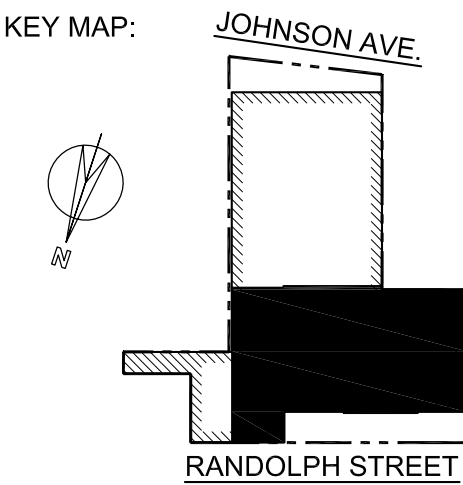

DOB B-SCAN

DRAWING TITLE / INFORMATION:

ENLARGED ADA
TOILET ROOM AND
DETAILS


SEAL & SIGNATURE:

DATE: 07-13-2016

DWG No.:

A-400.00


SHEET 09 OF 10

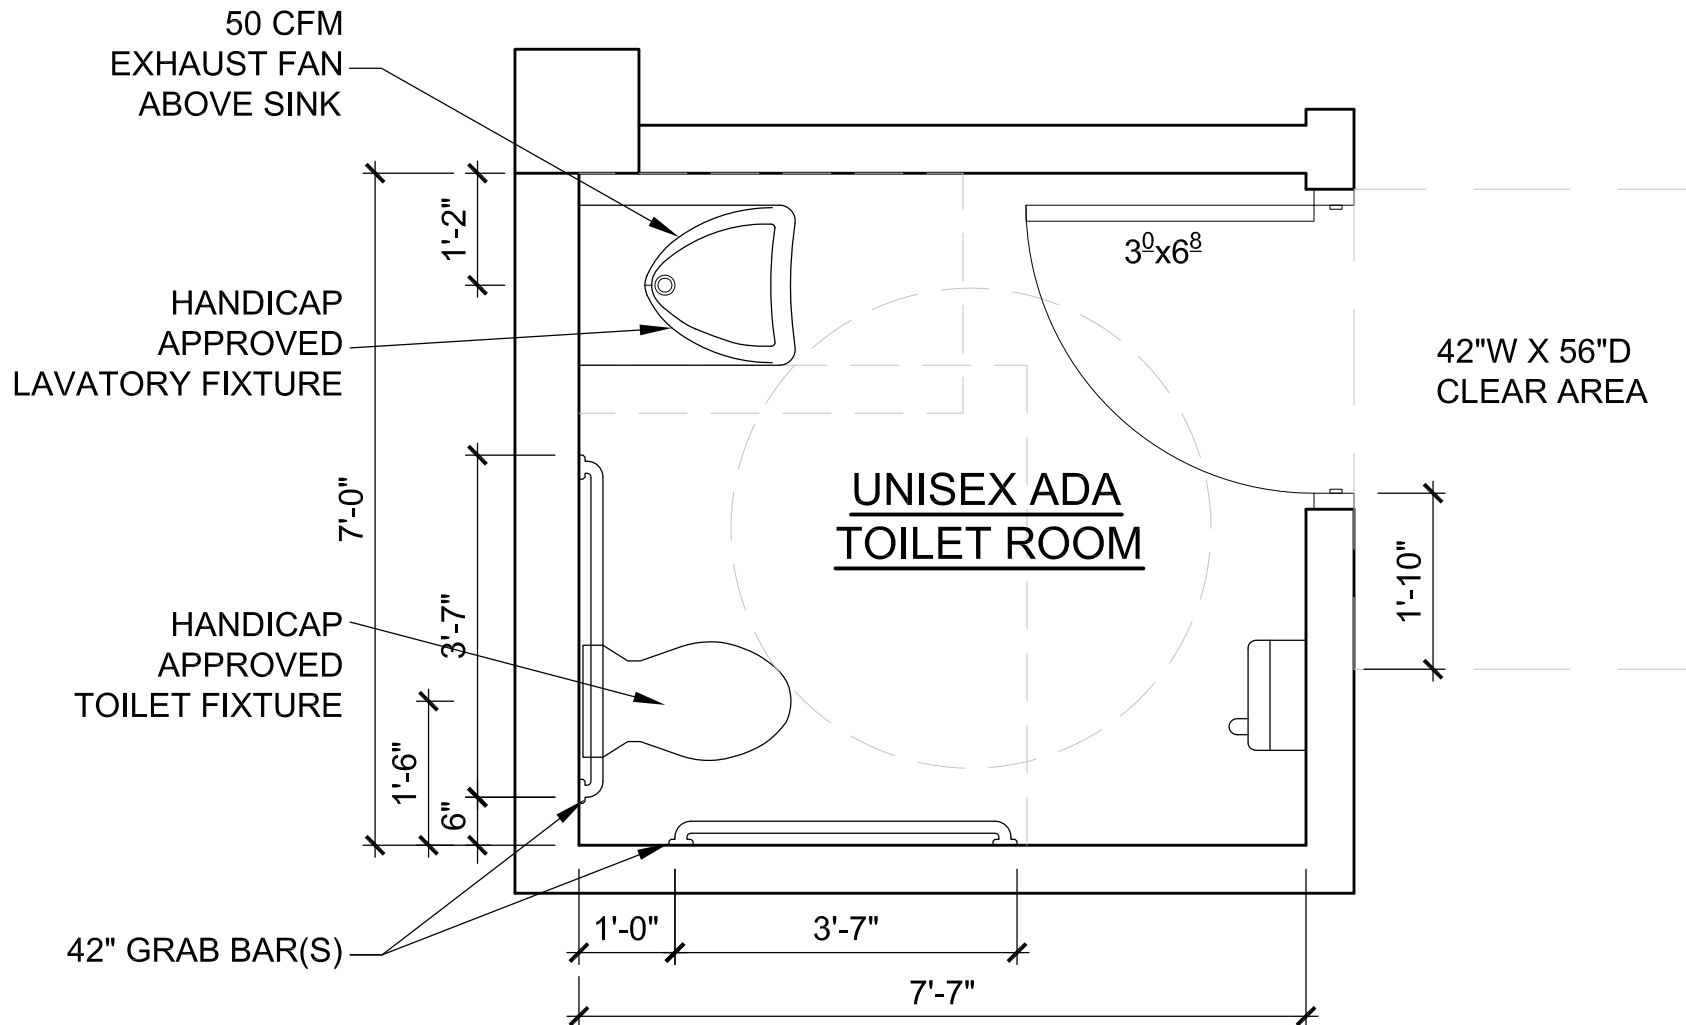

1 TYPICAL ENLARGED ADA TOILET ROOM
NOT TO SCALE


NOTE: ALL DOORS IN ALCOVES SHALL COMPLY WITH CLEARANCES FOR FRONT APPROACHES.

PULL SIDE

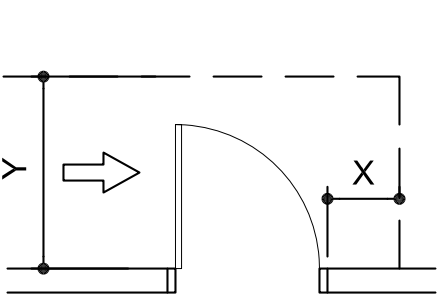


NOTE: X=36 IN. (915mm) MIN.
IF Y=60 IN. (1525mm)
X=42 IN. (1065mm) MIN.
IF Y=54 IN. (1370mm)


PUSH SIDE

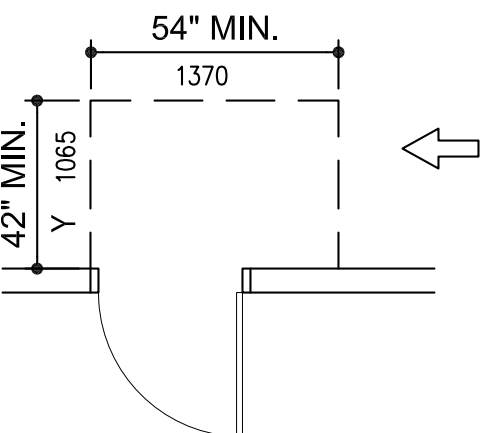

NOTE: Y=48 IN (1220mm) MIN.
IF DOOR HAS BOTH A LATCH AND A CLOSER

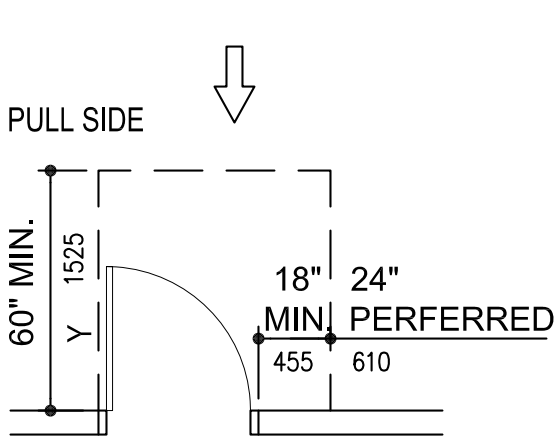


PULL SIDE

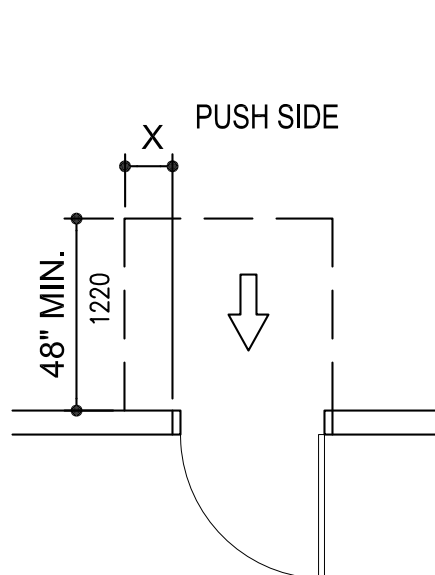


PUSH SIDE


NOTE: X=12 IN. (305mm)
IF THE DOOR HAS BOTH A CLOSER AND A LATCH.

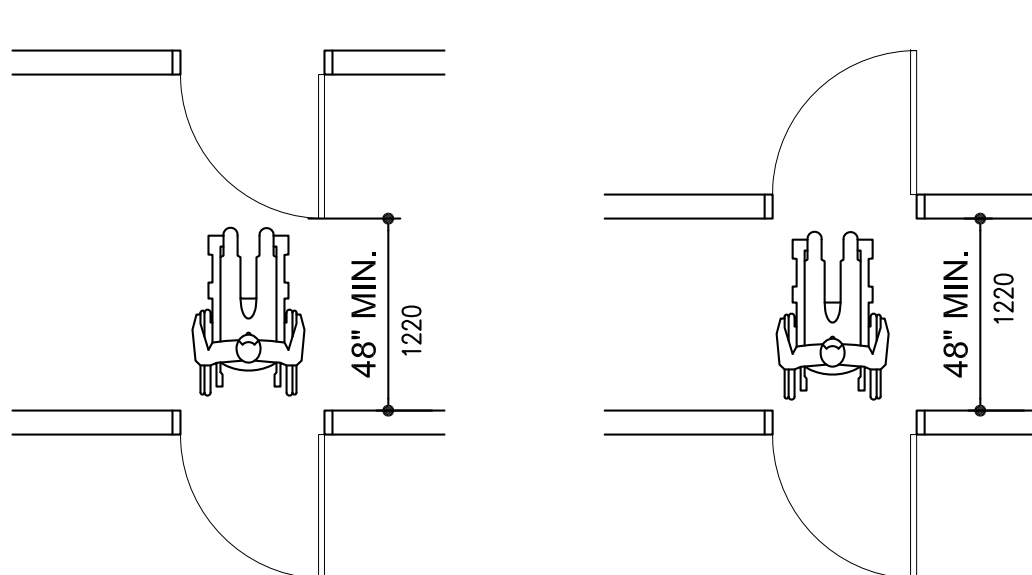

TWO HINGED DOORS IN SERIES

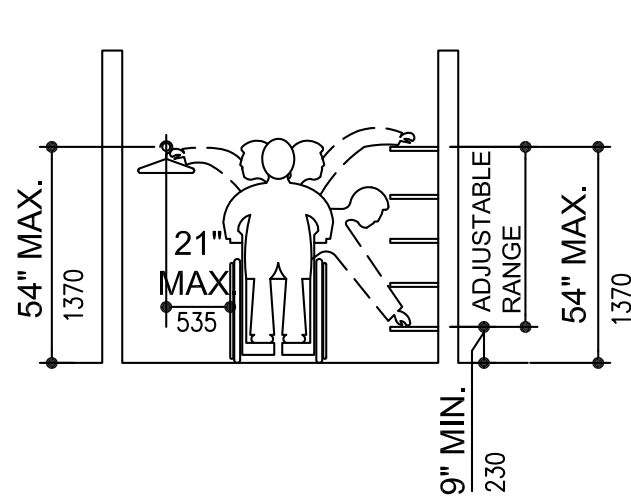


STORAGE SHELVES AND CLOSETS

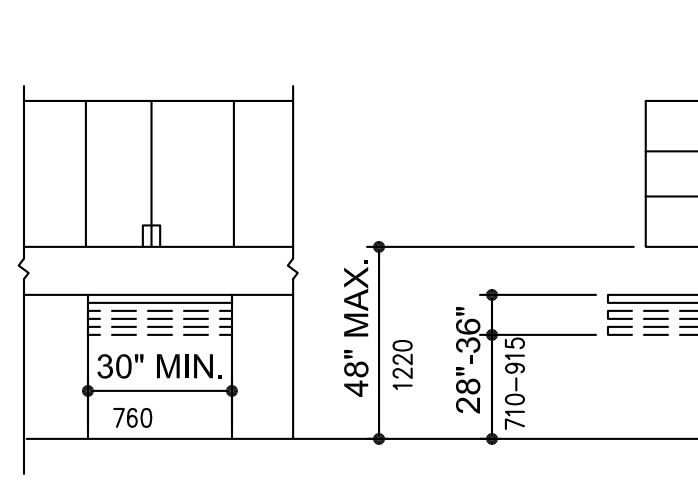

CABINETS AND BASE REMOVED AND HEIGHT ALTERNIVES


HINGE-SIDE APPROACHES - SWINGING DOORS

PULL SIDE

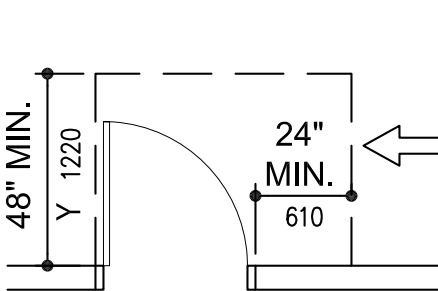

NOTE: Y=54 IN. (1370mm) MIN.
IF DOOR HAS A CLOSER


PUSH SIDE

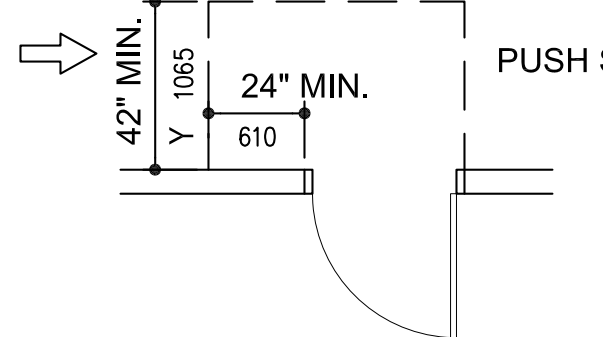


NOTE: Y=48 IN (1220mm) MIN.
IF DOOR HAS A CLOSER

LATCH SIDE APPROACHES - SWINGING DOORS


FRONT APPROACHES - SWINGING DOORS

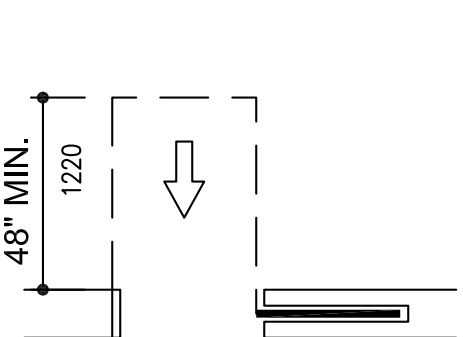

FRONT APPROACH

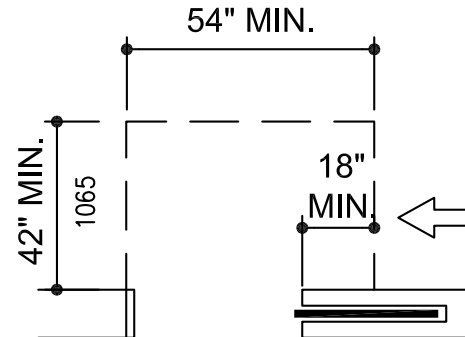


SLIDE SIDE APPROACH

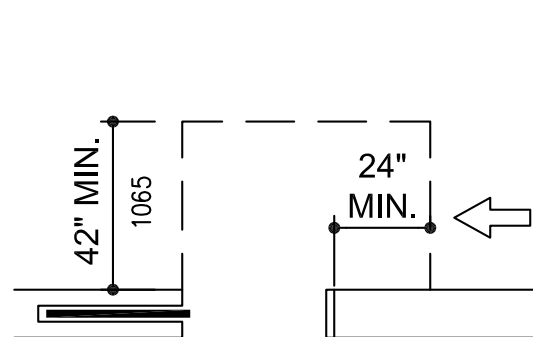


LATCH SIDE APPROACH


FRONT - SIDE AND LATCH APPROACHES - SLIDING DOORS

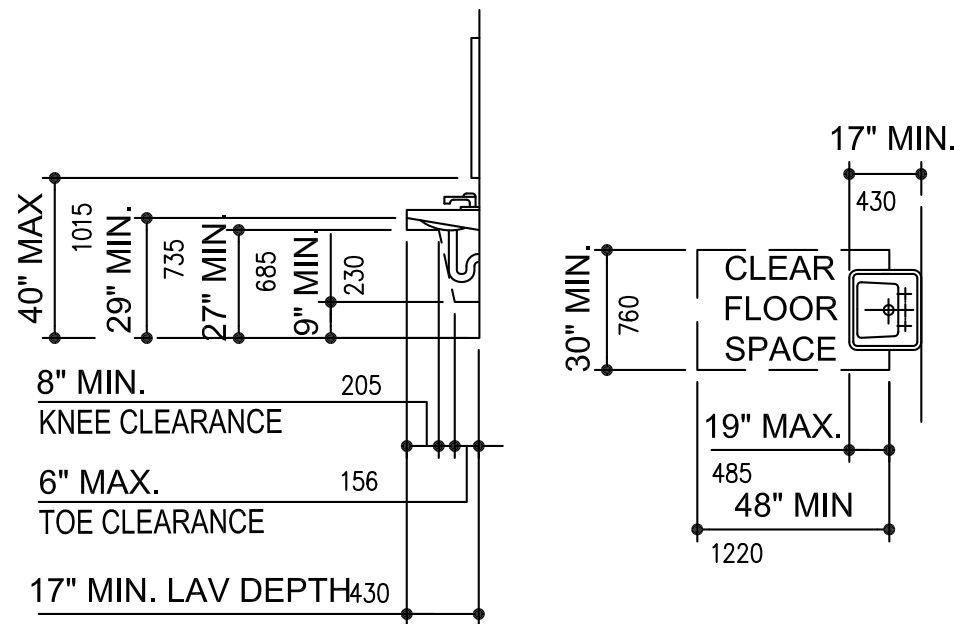


CLEAR FLOOR SPACE AT LAVATORIES

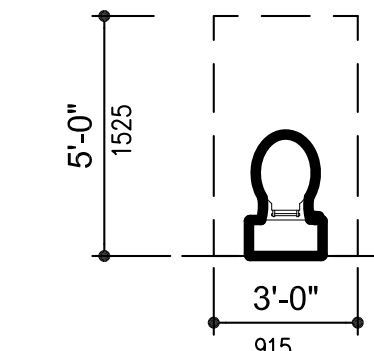


CLEAR FLOOR SPACE AT TOILETS

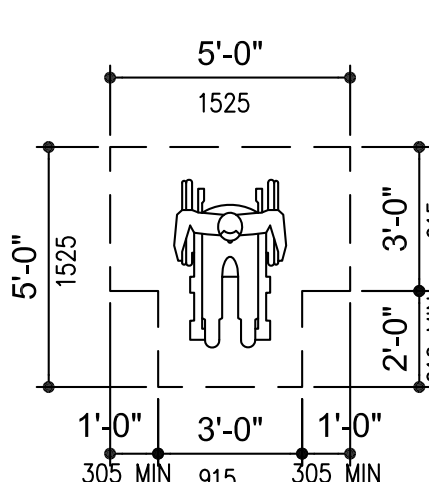

T-SHAPED TURNING SPACE


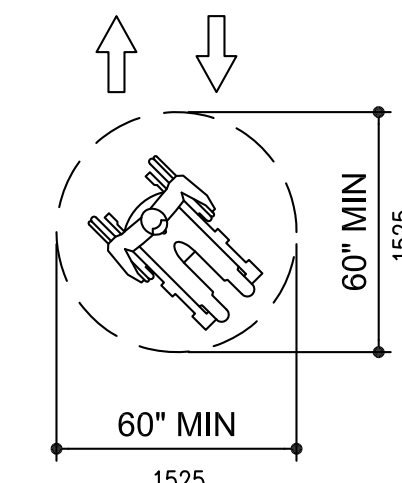


DIAMETER SPACE

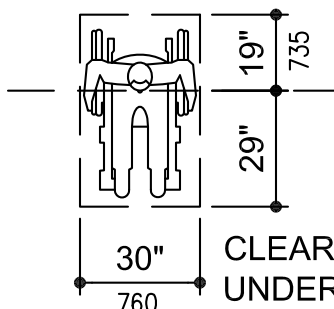

CLEAR WORK SPACE UNDER WORK SURFACE

1ST FLOOR										
No.	DOOR TYPE	SIZE W X H	DOOR MATERIAL	DOOR RATING	DOOR THNESS	FRAME MAT.	JAMB	SADDLE	HARDWARE	COMMENTS
1-1	A	3'-0" x 6'-8"	H.M.		1 ³ / ₄ "	H.M.		N		S.C. DOOR
1-2	A	3'-0" x 6'-8"	H.M.		1 ³ / ₄ "	H.M.		N		S.C. DOOR
1-3	D	3'-0" x 6'-8"	WOOD		1 ³ / ₄ "	H.M.		N		S.C. DOOR
1-4	A	3'-0" x 6'-8"	H.M.		1 ³ / ₄ "	H.M.		N		S.C. DOOR
1-5	A	3'-0" x 6'-8"	H.M.		1 ³ / ₄ "	H.M.		N		S.C. DOOR
1-6	A	3'-0" x 6'-8"	H.M.		1 ³ / ₄ "	H.M.		N		S.C. DOOR
1-7	E	3'-0" x 6'-8"	H.M.		1 ³ / ₄ "	H.M.		N		S.C. DOOR
1-8	E	3'-0" x 6'-8"	H.M.		1 ³ / ₄ "	H.M.		N		S.C. DOOR
1-9	A	3'-0" x 6'-8"	H.M.		1 ³ / ₄ "	H.M.		N		S.C. DOOR
1-10	C	3'-0" x 6'-8"	H.M.		1 ³ / ₄ "	H.M.		N		S.C. DOOR
1-11	C	(2) 3'-0" x 6'-8"	H.M.		1 ³ / ₄ "	H.M.		N		S.C. DOOR
1-12	C	(2) 3'-0" x 6'-8"	H.M.		1 ³ / ₄ "	H.M.		N		S.C. DOOR
1-13	C	(2) 3'-0" x 6'-8"	H.M.		1 ³ / ₄ "	H.M.		N		S.C. DOOR
1-14	G	(2) 3'-0" x 6'-8"	H.M.	1 ¹ / ₂ " HR.	1 ³ / ₄ "	H.M.		N		F.P.S.C. DOOR
1-15	G	(2) 3'-0" x 6'-8"	H.M.	1 ¹ / ₂ " HR.	1 ³ / ₄ "	H.M.		N		F.P.S.C. DOOR
1-16	G	(2) 3'-0" x 6'-8"	H.M.	1 ¹ / ₂ " HR.	1 ³ / ₄ "	H.M.		N		F.P.S.C. DOOR
1-17	G	(2) 3'-0" x 6'-8"	H.M.	1 ¹ / ₂ " HR.	1 ³ / ₄ "	H.M.		N		F.P.S.C. DOOR
1-18	F	(2) 3'-0" x 6'-8"	H.M.		1 ³ / ₄ "	H.M.		N		S.C. DOOR
1-19	F	(2) 3'-0" x 6'-8"	H.M.		1 ³ / ₄ "	H.M.		N		S.C. DOOR
1-20	F	(2) 3'-0" x 6'-8"	H.M.		1 ³ / ₄ "	H.M.		N		S.C. DOOR
1-21	A	3'-0" x 6'-8"	H.M.	1 ¹ / ₂ " HR.	1 ³ / ₄ "	H.M.		N		F.P.S.C. DOOR
1-22	A	3'-0" x 6'-8"	H.M.	1 ¹ / ₂ " HR.	1 ³ / ₄ "	H.M.		N		F.P.S.C. DOOR
1-23	A	2'-8" x 6'-8"	H.M.	1 ¹ / ₂ " HR.	1 ³ / ₄ "	H.M.		N		F.P.S.C. DOOR
1-24	A	3'-0" x 6'-8"	H.M.	1 ¹ / ₂ " HR.	1 ³ / ₄ "	H.M.		N		F.P.S.C. DOOR
1-25	A	3'-0" x 6'-8"	H.M.	1 ¹ / ₂ " HR.	1 ³ / ₄ "	H.M.		N		F.P.S.C. DOOR
1-26	A	3'-0" x 6'-8"	H.M.		1 ³ / ₄ "	H.M.		N		S.C. DOOR
1-27	E	3'-0" x 6'-8"	H.M.		1 ³ / ₄ "	H.M.		N		S.C. DOOR
1-28	E	3'-0" x 6'-8"	H.M.		1 ³ / ₄ "	H.M.		N		S.C. DOOR
1-29	G	(2) 3'-0" x 6'-8"	H.M.	1 ¹ / ₂ " HR.	1 ³ / ₄ "	H.M.		N		F.P.S.C. DOOR
1-30	G	(2) 3'-0" x 6'-8"	H.M.	1 ¹ / ₂ " HR.	1 ³ / ₄ "	H.M.		N		F.P.S.C. DOOR

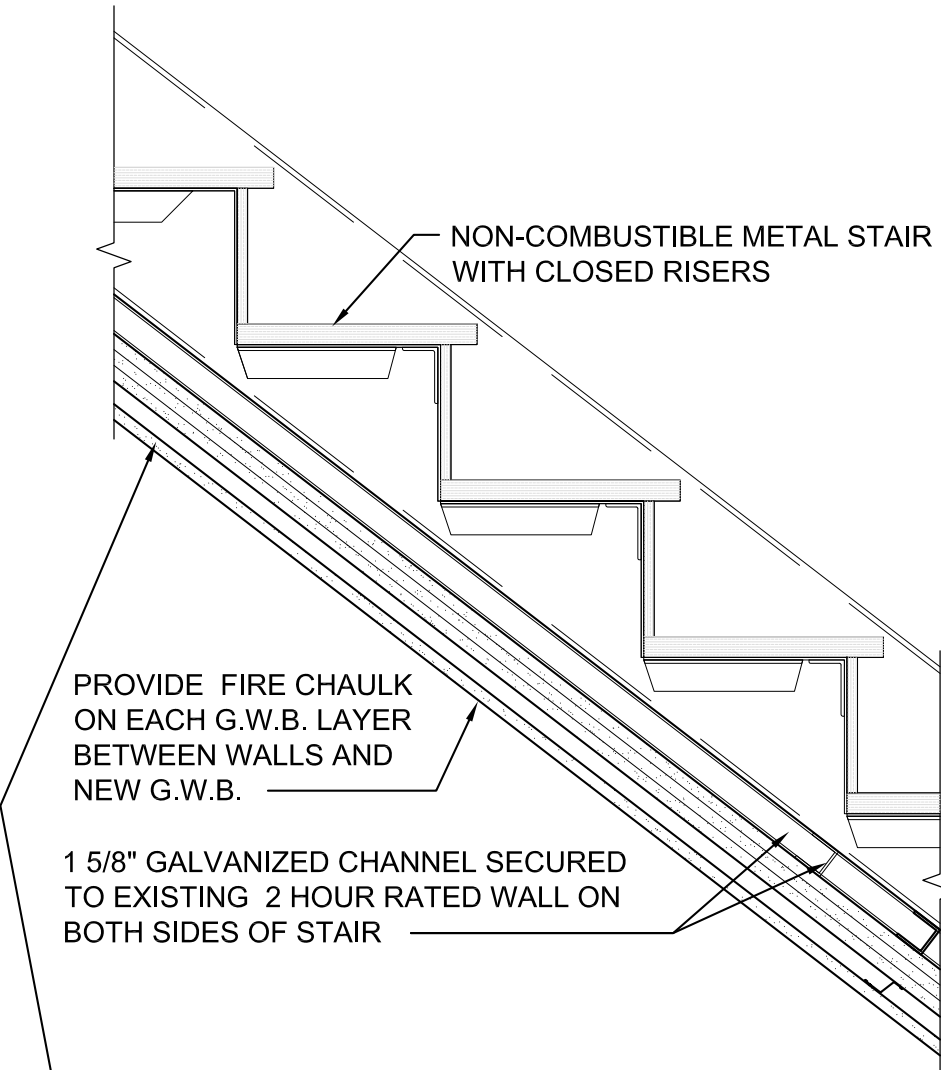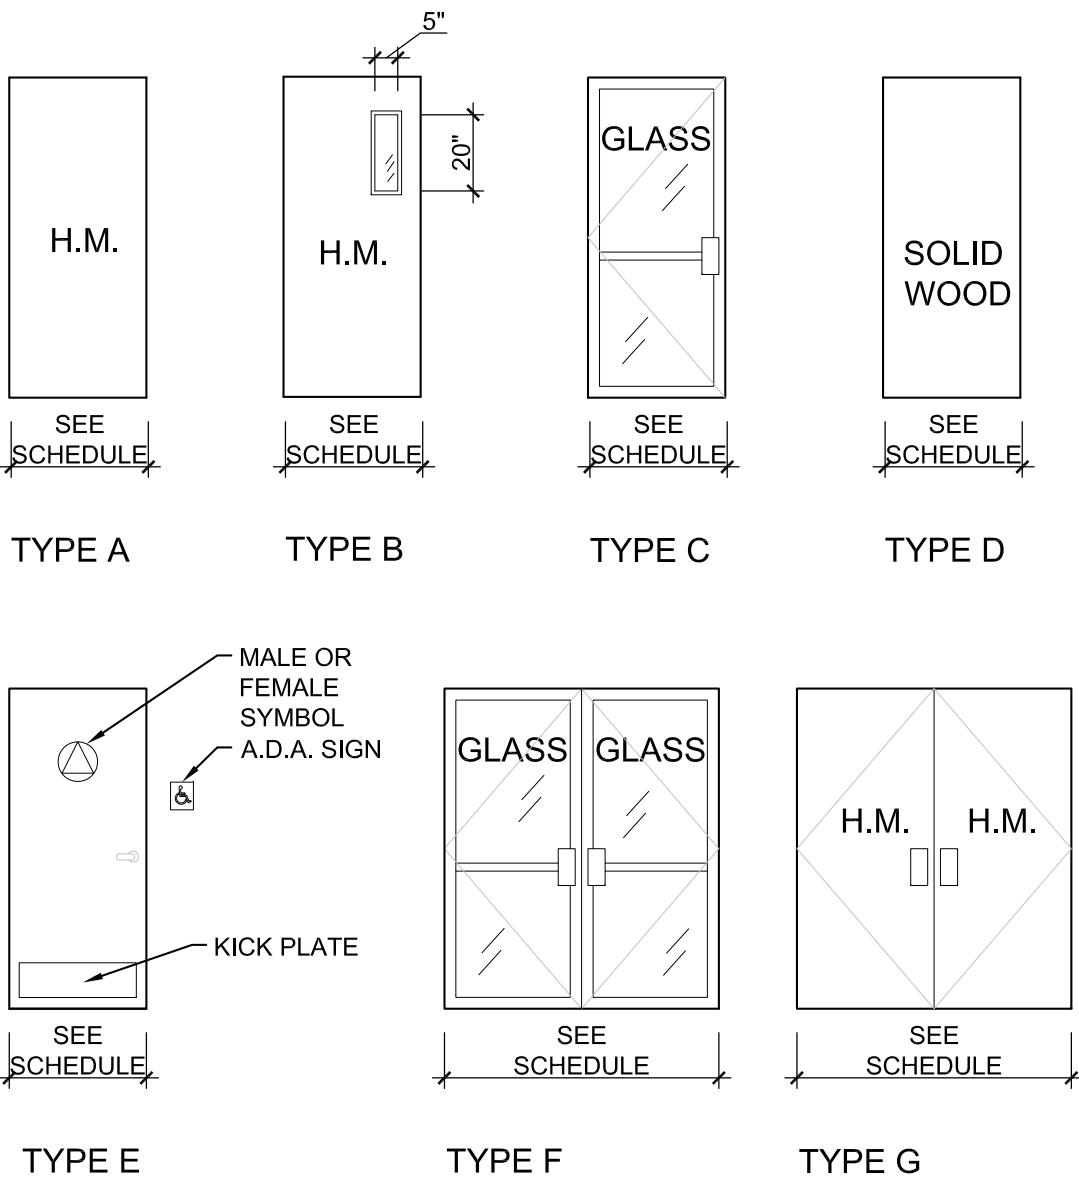

2 HOUR RATED CONSTRUCTION UNDER NON COMBUSTIBLE STAIR
GA FILE NO. FC4750
STEEL CHANNEL JOISTS, GYPSUM WALLBOARD, RIGID FURRING CHANNELS
BASE LAYER 5/8" TYPE X GYPSUM WALLBOARD APPLIED AT RIGHT ANGLES TO CHANNEL SHAPED,
MINIMUM 2" DEEP, 18 GAGE GALVANIZED STEEL JOISTS 24" O.C. WITH 1 1/8" TYPE S-12 DRYWALL
SCREWS 12" O.C. SECOND LAYER 5/8" TYPE X GYPSUM WALLBOARD APPLIED AT RIGHT ANGLES TO
JOISTS WITH 1 5/8" TYPE S-12 DRYWALL SCREWS 12" O.C. SECOND LAYER JOINTS OFFSET 24" FROM
BASE LAYER JOINTS. THIRD LAYER 5/8" TYPE X GYPSUM WALLBOARD APPLIED AT RIGHT ANGLES TO
JOISTS WITH 23/8" TYPE S-12 DRYWALL SCREWS 12" O.C. THIRD LAYER JOINTS OFFSET 12" FROM
SECOND LAYER JOINTS. HAT-SHAPED RIGID FURRING CHANNELS 24" O.C. APPLIED AT RIGHT ANGLES TO
JOISTS OVER THIRD LAYER WITH TWO 2 3/8" LONG TYPE S-12 DRYWALL SCREWS AT EACH JOIST. FACE
LAYER 5/8" TYPE X GYPSUM WALLBOARD APPLIED AT RIGHT ANGLES TO FURRING CHANNELS WITH 1 1/8"
TYPE S DRYWALL SCREWS 12" O.C.

WALL TYPES

1 WALL TYPE - #1 (EXTERIOR WALL)			
GA FILE NO. WP 1081	PROPRIETARY*	1 HOUR FIRE	45 T 49 STC SOUND
GYPSUM WALLBOARD, STEEL STUDS ONE LAYER 5/8" PROPRIETARY TYPE X GYPSUM WALLBOARD APPLIED PARALLEL TO EACH SIDE OF 1 5/8" STEEL STUDS 24" O.C. WITH 1" TYPE S DRYWALL SCREWS 8" O.C. AT VERTICAL JOINTS AND 12" O.C. AT FLOOR AND CEILING RUNNERS AND INTERMEDIATE STUDS. OPTIONAL HORIZONTAL RESILIENT CHANEL 24" O.C. APLIED TO STUDS WITH ONE 1/2" TYPE S-12 PAN HEAD SCREW AT EACH STUD INTERSECTION. STAGGER JOINTS 24" ON EACH SIDE AND ON OPPOSITE SIDES. SOUND TESTED WITH 3" MINERAL FIBER, 2.5 PCF, IN STUD SPACE. (NLB)			
PROPRIETARY GYPSUM BOARD AMERICAN GYPSUM COMPANY G-P GYPSUM LAFARGE NORHT AMERICA INC. NATIOINAL GYPSUM COMPANY		5/8" FIREBLOC ® TYPE X 5/8" TOUGHROCK ® FIREGUARD® 5/8" FIRECHECK ® TYPE X 5/8" COLD BOND ® BRAND FIRE-SHIELD® GYPSUM WALLBOARD	THICKNESS: APPROX. WEIGHT: FIRE TEST: SOUND TEST:
TEMPLE-INLAND FOREST PRODUCTS CORPORATION UNITED STATES GYPSUM COMPANY		5/8" TYPE X 5/8" SHEETROCK® BRAND ABUSE-RESISTANT GYPSUM PANELS	2" 3.5 PSF UL R1319, 94NK40598, 11-30-94, UL DESIGN U465 USG-960709, 7-18-96; RAL-TL99-103, 6-28-99' RAL-TL99-160, 9-3-99

2 WALL TYPE - #2 (INTERIOR WALL)			
GA FILE NO. WP 1081	PROPRIETARY*	1 HOUR FIRE	45 T 49 STC SOUND
GYPSUM WALLBOARD, STEEL STUDS ONE LAYER 5/8" PROPRIETARY TYPE X GYPSUM WALLBOARD APPLIED PARALLEL TO EACH SIDE OF 3 5/8" STEEL STUDS 24" O.C. WITH 1" TYPE S DRYWALL SCREWS 8" O.C. AT VERTICAL JOINTS AND 12" O.C. AT FLOOR AND CEILING RUNNERS AND INTERMEDIATE STUDS. OPTIONAL HORIZONTAL RESILIENT CHANEL 24" O.C. APLIED TO STUDS WITH ONE 1/2" TYPE S-12 PAN HEAD SCREW AT EACH STUD INTERSECTION. STAGGER JOINTS 24" ON EACH SIDE AND ON OPPOSITE SIDES. SOUND TESTED WITH 3" MINERAL FIBER, 2.5 PCF, IN STUD SPACE. (NLB)			
PROPRIETARY GYPSUM BOARD AMERICAN GYPSUM COMPANY G-P GYPSUM LAFARGE NORHT AMERICA INC. NATIOINAL GYPSUM COMPANY		5/8" FIREBLOC ® TYPE X 5/8" TOUGHROCK ® FIREGUARD® 5/8" FIRECHECK ® TYPE X 5/8" COLD BOND ® BRAND FIRE-SHIELD® GYPSUM WALLBOARD	THICKNESS: APPROX. WEIGHT: FIRE TEST: SOUND TEST:
TEMPLE-INLAND FOREST PRODUCTS CORPORATION UNITED STATES GYPSUM COMPANY		5/8" TYPE X 5/8" SHEETROCK® BRAND ABUSE-RESISTANT GYPSUM PANELS	4 7/8" 5 PSF UL R1319, 94NK40598, 11-30-94, UL DESIGN U465 USG-960709, 7-18-96; RAL-TL99-103, 6-28-99' RAL-TL99-160, 9-3-99

3 WALL TYPE - #3 (INTERIOR WALL)			
GA FILE NO. WP 1505	PROPRIETARY*	2 HOUR FIRE	55 T 59 STC SOUND
GYPSUM WALLBOARD, STEEL STUDS BASE LAYER 1/2" PROPRIETARY TYPE X GYPSUM WALLBOARD APPLIED AT THE RIGHT ANGLES TO EACH SIDE OF 2-1/2" STEEL STUDS @ 24" O.C. WITH 1" TYPE S DRYWALL SCREWS 12" O.C. FACE LAYER 5/8" PROPRIETARY TYPE X GYPSUM WALLBOARD APPLIED PARALLEL TO EACH SIDE WITH VERTICAL JOINTS MIDWAY BETWEEN STUDS. FACE LAYER ATTACHED TO BASE LAYER ONLY WITH 1-1/2" TYPE G DRYWALL SCREWS 12" O.C. AT VERTICAL JOINTS AND CENTERLINE OF FACE LAYER GYPSUM BOARD, 3/8" TO 1/2" DIAMETER ADHESIVE BEADS AROUND THE PERIMETER OF FACE BOARD, 2" FROM EACH EDGE AND END, AND IN THE FORM OF AN X JOINING THE CORNERS OF THE PERIMETER BEADS, ARE OPTIONAL. JOINTS STAGGERED 24" EACH LAYER AND SIDE. SOUND TESTED WITH ADHESIVE ATTACHMENT AND 2-1/2" GLASS FIBER INSULATION FRICTION FIT IN STUD SPACE. PROPRIETARY GYPSUM BOARD BPP CANADA INC. G-P GYPSUM			
1/2" PROROC® TYPE C GYPSUM PANELS 5/8" PROROC® TYPE C GYPSUM PANELS 1/2" TOUGHROCK® FIREGUARD® C 5/8" TOUGHROCK® FIREGUARD®		THICKNESS: APPROX. WEIGHT: FIRE TEST: SOUND TEST:	4 3/4" 10 PSF ULC 75T208, 11-20-75 ULC DESIGN W404 DRC 70-18-2, 2-16-70



11 PARK PLACE SUITE 817
NEW YORK, NY 10007
PHONE: 212-632-7566

190 EAST MAIN STREET
HUNTINGTON, NY 11743
PHONE: 631-424-8480 FAX: 631-947-4193

PROJECT

ALT. 2
198 RANDOLPH STREET


198 RANDOLPH STREET
BROOKLYN, N.Y. 11237

MEP ENGINEER
NAME: BENJAMIN KLEIN
ADDRESS: 1839 OCEAN PARKWAY
CITY: BROOKLYN
STATE: NEW YORK
ZIP: 11223
TEL: 718-998-0660
E-MAIL: BKLEIN@MEPDESIGNS.NET

STRUCTURAL ENGINEER
NAME: WEXLER ASSOCIATES
ADDRESS: 12 WEST 32ND STREET
CITY: NEW YORK
STATE: NEW YORK
ZIP: 10001
TEL: 212-643-1500
E-MAIL: NWEXLER@NWEXLER.COM

SPECIAL INSPECTOR:
NAME:
ADDRESS:
CITY:
STATE:
ZIP:
TEL:
E-MAIL:

REVISIONS:

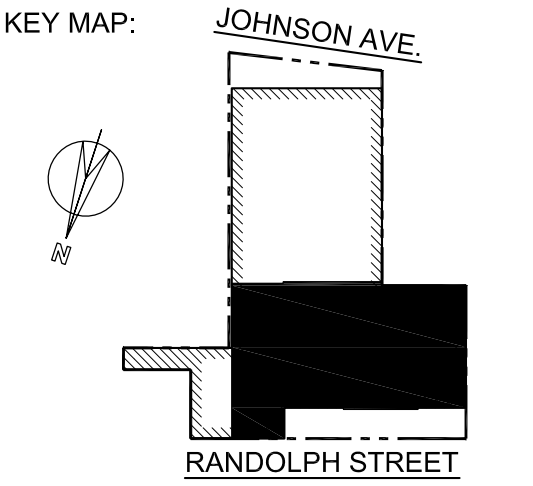

DOB B-SCAN

DOOR
SCHEDULE,
WALL TYPES
AND DETAILS

SEAL & SIGNATURE:

DATE: 07-13-2016
DWG No.:

A-401.00