


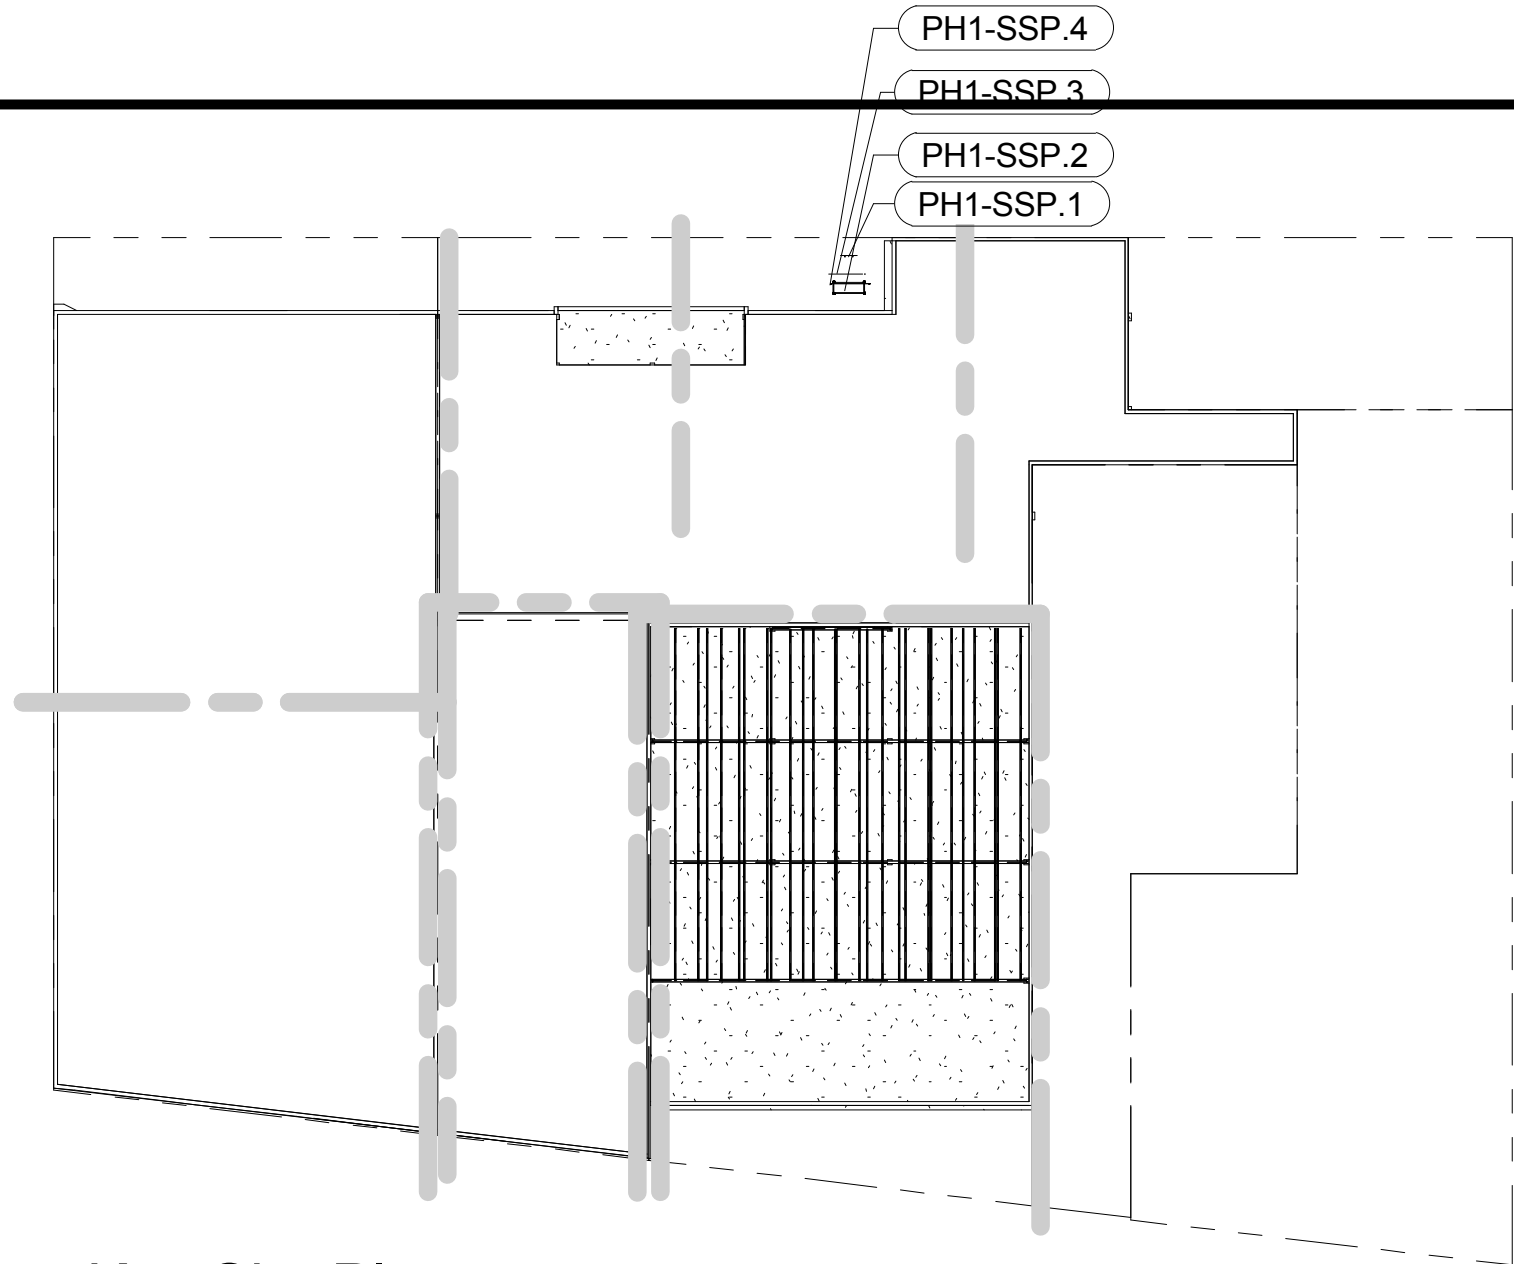

Key Site Plan:

Scale: 1" = 50'-0"

HELICAL PILE NOTES

- HOT DIP GALVANIZED PER ASTM A153 - (OR LATEST REVISION)
- LEAD AND EXTENSION SECTION LENGTHS AND HELIX SPACING ARE NOMINAL
- NOMINAL SPACING BETWEEN HELIX PLATES IS THREE TIMES THE DIAMETER OF THE LOWER HELIX
- SHAFT MATERIAL-HOT ROLLED ROUND-CORNERED SQUARE (RCS) SOLID STEEL BARS ASTM A29 MINIMUM YIELD STRENGTH=70 KSI (555); 90 KSI (55150,55175,55200).
- HELIX MATERIAL-HOT ROLLED LOW CARBON STEEL SHEET, STRIP, OR PLATE PER ASTM A572, OR A1018, OR A565.
- MANUFACTURER TO HAVE IN EFFECT INDUSTRY RECOGNIZED WRITTEN QUALITY CONTROL FOR ALL MATERIALS AND MANUFACTURING PROCESSES.
- ALL WELDING TO BE DONE BY WELDERS CERTIFIED UNDER SECTION 5 OF THE AWS CODE D1.1.
- EACH HELICAL PILES DESIGNED FOR A MINIMUM OF 30 TONS LOAD TENSION AND COMPRESSION.

Loading Schedule (PSF)		
Type	Loading	
Roof Dead Load	100 psf	
Floor Dead Load (8" Concrete Slab Typ.)	100 psf	
Partitions/Misc.	10 psf	
Roof Live Load	30 psf	
Floor Live Load	100 psf	

Controlled Special Inspection Categories & Quality Control	
Special Inspections	Code/Section
Concrete Sampling and Testing (TR-2)	BC 1905.6, 1913.10
Concrete Design Mix (TR-3)	BC 1905.3, BC 1913.5
Excavations - Sheeting, Shoring and Bracing	BC 1704.20.2
Structural Stability - Existing Buildings	BC 1704.20.1
Helical Piles (BB # 2014-020)	BC 1704.8.5
Subsurface Investigations (Borings/Test Pits)	BC 1704.7.4
Subgrade Inspection	BC 1704.7.1
Concrete - Cast-In-Place	BC 1704.4
Footings and Foundation	BC 110.3.1
Final*	28-116.2.4.2, BC 110.5, Dir. 14 of 1975, & RCNY §101-10

Sheet List Index		
Page	Sheet	Sheet Name
Displ.	No.	
	S 011	Existing Roof Framing Plan @ 537 Johnson Avenue (2 of 2)
	S 008	Proposed Roof Framing Plan @ 537 Johnson Avenue (1 of 2)
	S 012	Proposed Roof Framing Plan @ 537 Johnson Avenue (2 of 2)
	S 015	Existing Roof Framing Plan @ 557 Johnson Avenue
	S 016	Proposed Roof Framing Plan @ 557 Johnson Avenue
	S 013	Existing Foundation Plan and Slab Layout @ 557 Johnson Avenue
	S 014	Proposed Foundation Plan and Slab Layout @ 557 Johnson Avenue
	S 017	Existing Foundation Plan and Slab Layout @ 561 Johnson Avenue
	S 018	Proposed Foundation Plan and Slab Layout @ 561 Johnson Avenue
	S 019	Existing Roof Framing Plan @ 561 Johnson Avenue
	S 020	Proposed Roof Framing Plan @ 561 Johnson Avenue
0	S XXX	Steel Quantity Take-Off
1	S 001	Title Sheet - Proposed Key Plan and Construction and Structural Notes
2	S 002	Existing Foundation Plan and Slab Layout @ 561 Johnson Avenue
3	S 002a	Partial Existing Foundation Plan and Slab Layout @ 561 Johnson Avenue (1 of 3)
4	S 002b	Partial Existing Foundation Plan and Slab Layout @ 561 Johnson Avenue (2 of 3)
5	S 002c	Partial Existing Foundation Plan and Slab Layout @ 561 Johnson Avenue (3 of 3)
6	S 003	Existing Conditions and Proposed Roof Framing Alterations @ 561 Johnson Avenue
7	S 007	Existing Roof Framing Plan @ 537 Johnson Avenue (1 of 2)
8	S 005	Existing Foundation Plan and Slab Layout @ 537 Johnson Avenue (1 of 2)
9	S 009	Existing Foundation Plan and Slab Layout @ 537 Johnson Avenue (2 of 2)
10	S 006	Proposed Foundation Plan and Slab Layout @ 537 Johnson Avenue (1 of 2)
11	S 010	Proposed Foundation Plan and Slab Layout @ 537 Johnson Avenue (2 of 2)

CONCRETE NOTES

- DESIGN, MATERIALS, & METHODS OF CONSTRUCTION SHALL COMPLY WITH THE BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE ACI 318 OF THE AMERICAN CONCRETE INSTITUTE, LATEST EDITION. ULTIMATE DESIGN STRENGTH OF 28 DAYS FOR ALL REINFORCED CONCRETE IS TO BE 4000 PSI.
- CONCRETE & REINFORCING MATERIALS SHALL CONFORM TO THE FOLLOWING STANDARDS-LATEST EDITION.
- PORTLAND CEMENTS AS PER ASTM C150.
- AIR-ENTRAINING PORTLAND CEMENT AS PER ASTM C175.
- CONCRETE AGGREGATES AS PER ASTM 33.
- WATER SHALL BE CLEAN & FREE FROM INJURIOUS AMOUNT OF OILS, ACIDS, ALKALINE SALT, ORGANIC MATERIALS & DELETERIOUS SUBSTANCES.
- REINFORCING BARS SHALL BE INTERMEDIATE GRADE NEW BILLET STEEL, DEFORMED AS PER ASTM A615, GRADE 60, WITH DESIGN STRESS 60 KSI.
- COLD DRAWN WIRE OR WELDED WIRE FABRIC AS PER ASTM A62-84 AND A185-84.
- ALL EXPOSED CONCRETE SHALL BE AIR ENTRAINED.
- THREE TEST CYLINDERS SHALL BE MOLDED FOR EACH 50 CUBIC YARDS OR FRACTION THEREOF OF EACH CLASS OF CONCRETE PLACED IN ANY ONE DAY. SAMPLES SHALL BE TAKEN DIRECTLY FROM MIXER AS PER ASTM C172-1984, CURED AS PER ASTM C31-1984 AND TESTED AT THE AGE OF 28 DAYS AS PER ASTM C39-1984. TEST SHALL BE PERFORMED BY A LICENSED TESTING LABORATORY. REPORTS TO BE FILED WITH THE ENGINEER. TEST CYLINDERS SHALL BE STORED IN ANY INSULATED CURING BOX, LOCATED TO MINIMIZE HAZARD OF DISTURBANCE DURING CURING, FREE FROM VIBRATION, REMOTE FROM TRAFFIC, HEATED TO MAINTAIN PROPER CURING CONDITIONS. BOX SHALL BE PROVIDED BEFORE FIRST LOAD OF CONCRETE IS DELIVERED. CYLINDERS SHALL REMAIN IN CURING BOX AT LEAST 24 HOURS AND READY FOR DELIVERY TO TESTING LABORATORY.
- SLABS ON GROUND SHALL BE 4000-PSI CONCRETE REINFORCED WITH GG-1010 WELDED WIRE MESH 4" THICK.
- WIRE MESH SHALL BE ELECTRICALLY WELDED AND SHALL HAVE AN ULTIMATE TENSILE STRENGTH OF 70,000 PSI.
- THE ENGINEER DESIGNATED FOR CONTROLLED INSPECTION SHALL CHECK OR PERFORM THE FOLLOWING ITEMS:
 1. PREPARATION AND TESTING OF CYLINDERS.
 2. SLUMP.
 3. AIR CONTENT.
 4. UNIT WEIGHT.
 5. VERIFY THAT WEIGHTS AND RATIO CONFORM TO THE PRE-QUALIFIED MIX, ADJUSTED FOR MOISTURE CONTENT AND GRADUATION OF AGGREGATES
 6. TEMPERATURE.
 7. SIZE AND DIMENSIONS OF CONCRETE AND FORM MEMBERS.
 8. SIZE AND POSITIONS OF REINFORCING.
 9. PLACEMENT OF CONCRETE, TEMPERATURE PROTECTION AGAINST EXCESSIVE TEMPERATURE CURING.
 10. FILE WITH AND OBTAIN APPROVAL FROM THE APPROPRIATE BUILDING DEPARTMENT OF ALL REQUIRED TESTS AND INSPECTION REPORTS INCLUDING CONCRETE PRODUCERS CERTIFICATE.

FORMWORK AND SHORING NOTES

- SHORES SHALL BE DESIGNED AND DETAILED BY A PROFESSIONAL ENGINEER LICENSED IN THE STATE OF NEW YORK. DRAWINGS ILLUSTRATING THE SHORING SYSTEM AND SEQUENCING SHALL BE SIGNED AND SEALED BY SAID ENGINEER.
- DESIGN AND ERECT FORMS AND SHORES IN ACCORDANCE WITH ACI-347. DESIGN FORMS AND SHORES FOR HORIZONTAL CONCRETE MEMBERS FOR NOT LESS THAN DEAD LOAD PLUS 50 PSF CONSTRUCTION LOAD AND FOR THE CUMULATIVE LOADS OF SUPPORTING FLOOR SLABS. DESIGN SHORES WITH A MINIMUM FACTOR OF SAFETY OF 3.
- AS A MINIMUM MAINTAIN 100% FOR THE FLOOR BEING CAST AND THE FLOOR BELOW THE FLOOR BEING CAST. MAINTAIN 2/3 SHORING ON THE SECOND FLOOR BELOW THE FLOOR BEING CAST. MAINTAIN 1/3 SHORING ON THE THIRD FLOOR BELOW THAT BEING CAST. MAINTAIN 100% SHORING WHERE SPECIFICALLY INDICATED ON THE STRUCTURAL DRAWINGS.
- USE A MAXIMUM SPACING OF RESHORING OF EIGHT FEET IN EACH DIRECTION.
- DO NOT STRIP FORMS UNTIL CONCRETE IS A MINIMUM THREE DAYS OLD AND HAS REACHED 3,000 PSI. RESHORE EACH DAY AS IT IS STRIPPED AS NOTED IN #3 ABOVE. RESHORE AS SOON AS FORMS ARE REMOVED. COMPLETE RESHORING OF ALL STRIPPED AREAS THE SAME DAY. RESHORES SHALL NOT BE REMOVED UNTIL THE CONCRETE HAS ATTAINED ITS SPECIFIED 28 DAY STRENGTH.
- PROVIDE TEMPORARY BRACING AS NEEDED TO ENSURE STABILITY OF STRUCTURE DURING CONSTRUCTION.
- FORMING, SHORING AND RESHORING SHALL BE INSPECTED BY THE PROFESSIONAL ENGINEER WHO PREPARES THE SAID DRAWINGS. THEY SHALL SUBMIT A STATEMENT TO THE ENGINEER THAT THIS WORK WAS PERFORMED IN ACCORDANCE WITH PLANS AND SPECIFICATIONS.
- SHORING SHOULD BE PERFORMED AS INDICATED ON THE SHORING DOCUMENTS SO THAT THE CONTRACTOR ASSURES THAT ADEQUATE SUPPORT IS MAINTAINED UNDER AND BY THE EXISTING AND NEW FOUNDATION.
- OWNER TO INDEMNIFY STRUCTURAL ENGINEER FOR ANY LEGAL ACTION TAKEN AGAINST HIM
- PROTECTION SIDES OF EXCAVATION SHALL COMPLY WITH SECT C 27-1032 OF BUILDING CODE.

SURVEY AND MONITORING NOTES

- A BUILDING PROTECTION PLAN (BPP) IN ACCORDANCE WITH THE REQUIREMENTS OF THE NYCDOB TECHNICAL POLICY AND PROCEDURE NOTICE #10/08 (NYCDOB #10/08) SHOULD BE PREPARED.
- PRE-CONSTRUCTION (PRE-CONDITION) SURVEY OF THE ADJACENT STRUCTURES AND BUILDINGS SHALL BE PERFORMED PRIOR TO CONSTRUCTION IN ACCORDANCE WITH THE BUILDING PROTECTION PLAN. THE CONTRACTOR SHALL REVIEW AND FAMILIARIZE HIMSELF WITH THE RESULTS OF THE SURVEY. THE CONTRACTOR SHALL MAKE A VISUAL INSPECTION OF THE ADJACENT STRUCTURES (INSIDE AND OUT) PRIOR TO STARTING THE WORK.
- MONITOR THE ADJUTING BUILDINGS AND STRUCTURES TO THE NORTH AND SOUTH BY OPTICAL SURVEY AT ABOUT 25-FT INTERVALS FOR VERTICAL AND LATER MOVEMENT. NOTE THAT BUILDING MONITORING LOCATIONS ARE NOT SHOWN ON THE SUPPORT OF EXCAVATION PLAN FOR CLARITY.
- CRACK GAUGES SHALL BE INSTALLED ON EXISTING NEIGHBORING BUILDING CRACKS AND MONITORED DURING EXCAVATION AND UNDERPINNING OPERATIONS.
- OBTAIN BASELINE READINGS OF THE MONITORING POINTS PRIOR TO EXCAVATION AND NEW CONSTRUCTION. HORIZONTAL AND VERTICAL SURVEY DATA TO BE OBTAINED BY A NEW YORK STATE LICENSED SURVEYOR.
- PERFORM OPTICAL SURVEYS AT LEAST TWICE PER WEEK DURING EXCAVATION AND FOUNDATION CONSTRUCTION. IF MOVEMENTS OCCUR, INCREASE THE FREQUENCY OF THE READINGS AS RECOMMENDED BY THE BPP OR ENGINEER.
- VIBRATION MONITORS (SEISMOGRAPHS) SHALL BE PLACED ADJACENT TO AREAS WHERE WORK IS BEING PERFORMED AS NEGOTIATED WITH THE NEIGHBORING BUILDINGS. NOTE THAT THE SEISMOGRAPH LOCATIONS ARE NOT SHOWN ON THE SUPPORT OF EXCAVATION PLAN FOR CLARITY.
- BUILDING MOVEMENT AND VIBRATION CRITERIA:
 1. ALL MONITORING FREQUENCIES SHALL COMPLY WITH TPN 10/08.
 2. IF THE VERTICAL OR LATERAL BUILDING MOVEMENT REACHES 1/8-INCH, IMMEDIATELY NOTIFY THE CONSTRUCTION MA MANAGER, OWNER AND ENGINEER.
 3. IF THE VERTICAL OR LATERAL BUILDING MOVEMENT REACHES 1/4-INCH, IMMEDIATELY NOTIFY THE CONSTRUCTION MANAGER, OWNER, ENGINEER, AND STOP WORK. THE WORK SHALL RESUME UPON APPROVAL BY THE CONSTRUCTION MANAGER, OWNER, ENGINEER, OF APPROVED REMEDIAL MEASURES AND/OR MODIFIED CONSTRUCTION PROCEDURES.
 4. IF THE VIBRATIONS EXCEED 0.5-IPS, AND/OR ANY INDIVIDUAL CRACK GAUGE READING EXCEEDS 2mm, IMMEDIATELY INFORM THE CONSTRUCTION MANAGER, OWNER, AND ENGINEER, AND STOP WORK. THE WORK SHALL RESUME UPON APPROVAL BY THE CONSTRUCTION MANAGER, OWNER AND ENGINEER, OF APPROVED REMEDIAL MEASURES AND/OR MODIFIED CONSTRUCTION PROCEDURES. INFORM NYC DOB EXCAVATION UNIT. OBSERVE NEIGHBORING STRUCTURE CONDITIONS AND REVIEW AND MODIFY AS NECESSARY. HIS MEANS AND METHODS FOR EXCAVATION, AND SUPPORT OF EXCAVATION AND UNDERPINNING PER CONSTRUCTION. WORK SHALL NOT COMMENCE UNTIL AGREED UPON CORRECTIVE ACTION IS IMPLEMENTED BY THE CONTRACTOR.
- VIBRATION MONITORS SHALL TAKE REAL-TIME READINGS.
- ALL MONITORING DATA SHALL BE PRESENTED TO THE CONSTRUCTION MANAGER, OWNER, AND ENGINEER AT THE END OF EACH DAY, OR AT AGREED-UPON INTERVALS.

FOUNDATION REQUIREMENTS

- FOUNDATIONS FOR THIS PROJECT CONSIST OF WALLS AND SLABS.
- NO RESPONSIBILITY IS ASSUMED BY THE ENGINEER FOR THE VALIDITY OF THE SUBSURFACE CONDITIONS DESCRIBED ON THE DRAWINGS, SPECIFICATIONS, TEST BORINGS, OR TEST PITS AND SOIL REPORT. THIS DATA IS INCLUDED ONLY TO ASSIST THE CONTRACTOR DURING BIDDING AND SUBSEQUENT CONSTRUCTION AND REPRESENTS CONDITIONS ONLY AT SPECIFIC LOCATIONS AT THE TIME THEY WERE MADE.
- FOUNDATION UNITS SHALL BE CENTERED UNDER SUPPORTED STRUCTURAL MEMBERS, UNLESS OTHERWISE NOTED ON THE DRAWINGS.
- FOUNDATIONS SHALL BEAR ON UNDISTURBED SOIL HAVING AN ALLOWABLE BEARING CAPACITY OF 2 TONS PER SQUARE FOOT.
- IF BEARING MATERIALS WITH LOWER BEARING CAPACITY THAN INDICATED IN NOTE #4 ARE ENCOUNTERED AT THE SPECIFIED BEARING ELEVATION, THE FOOTING SHALL REMAIN AT ITS SPECIFIED BEARING ELEVATION BUT THE UNDERLYING UNSUITABLE MATERIAL SHALL BE REMOVED AND REPLACED WITH COMPACTED GRAVEL FILL OR CONCRETE (f'c = 3,000 PSI).
- EXTERIOR CONSTRUCTION SHALL BE CARRIED DOWN BELOW FINISHED EXTERIOR GRADE TO A MINIMUM DEPTH OF 4'-0", UNLESS OTHERWISE NOTED.
- PROVIDE TEMPORARY OR PERMANENT SUPPORTS, WHETHER SHORING, SHEETING, OR BRACING SO THAT NO HORIZONTAL MOVEMENT OR VERTICAL SETTLEMENT OCCURS TO EXISTING STRUCTURE, STREETS, OR UTILITIES ADJACENT TO THE PROJECT SITE.
- CARRY OUT CONTINUOUS CONTROL OF SURFACE AND SUBSURFACE WATER UNTIL SUFFICIENT DEAD LOAD HAS ACCUMULATED TO PREVENT FLOATATION OF ANY PART OF THE STRUCTURE.
- CARRY OUT CONTINUOUS CONTROL OF SURFACE AND SUBSURFACE WATER DURING CONSTRUCTION SO THE FOUNDATION WORK IS DONE ON DRY AND UNDISTURBED SUBGRADE MATERIAL, AS APPLICABLE.
- BOTTOM 3' OF EXCAVATION FOR FOOTINGS SHALL BE FINISHED BY HAND SHOVEL OR AS DIRECTED BY TESTING AGENCIES AND INSPECTED AND CERTIFIED BY PROFESSIONAL AND/OR SOILS ENGINEERS LICENSED IN THE NEW YORK STATE.
- BACKFILL UNDER ANY PORTION OF THE STRUCTURE SHALL BE COMPACTED IN 6" LIFTS TO AT LEAST 95 MAXIMUM DRY DENSITY PER ASTM D-698.

FOUNDATION REQUIREMENTS

- FOUNDATIONS FOR THIS PROJECT CONSIST OF WALLS AND SLABS.
- NO RESPONSIBILITY IS ASSUMED BY THE ENGINEER FOR THE VALIDITY OF THE SUBSURFACE CONDITIONS DESCRIBED ON THE DRAWINGS, SPECIFICATIONS, TEST BORINGS, OR TEST PITS AND SOIL REPORT. THIS DATA IS INCLUDED ONLY TO ASSIST THE CONTRACTOR DURING BIDDING AND SUBSEQUENT CONSTRUCTION AND REPRESENTS CONDITIONS ONLY AT SPECIFIC LOCATIONS AT THE TIME THEY WERE MADE.
- FOUNDATION UNITS SHALL BE CENTERED UNDER SUPPORTED STRUCTURAL MEMBERS, UNLESS OTHERWISE NOTED ON THE DRAWINGS.
- FOUNDATIONS SHALL BEAR ON UNDISTURBED SOIL HAVING AN ALLOWABLE BEARING CAPACITY OF 2 TONS PER SQUARE FOOT.
- IF BEARING MATERIALS WITH LOWER BEARING CAPACITY THAN INDICATED IN NOTE #4 ARE ENCOUNTERED AT THE SPECIFIED BEARING ELEVATION, THE FOOTING SHALL REMAIN AT ITS SPECIFIED BEARING ELEVATION BUT THE UNDERLYING UNSUITABLE MATERIAL SHALL BE REMOVED AND REPLACED WITH COMPACTED GRAVEL FILL OR CONCRETE (f'c = 3,000 PSI).
- EXTERIOR CONSTRUCTION SHALL BE CARRIED DOWN BELOW FINISHED EXTERIOR GRADE TO A MINIMUM DEPTH OF 4'-0", UNLESS OTHERWISE NOTED.
- PROVIDE TEMPORARY OR PERMANENT SUPPORTS, WHETHER SHORING, SHEETING, OR BRACING SO THAT NO HORIZONTAL MOVEMENT OR VERTICAL SETTLEMENT OCCURS TO EXISTING STRUCTURE, STREETS, OR UTILITIES ADJACENT TO THE PROJECT SITE.
- CARRY OUT CONTINUOUS CONTROL OF SURFACE AND SUBSURFACE WATER UNTIL SUFFICIENT DEAD LOAD HAS ACCUMULATED TO PREVENT FLOATATION OF ANY PART OF THE STRUCTURE.
- CARRY OUT CONTINUOUS CONTROL OF SURFACE AND SUBSURFACE WATER DURING CONSTRUCTION SO THE FOUNDATION WORK IS DONE ON DRY AND UNDISTURBED SUBGRADE MATERIAL, AS APPLICABLE.
- BOTTOM 3' OF EXCAVATION FOR FOOTINGS SHALL BE FINISHED BY HAND SHOVEL OR AS DIRECTED BY TESTING AGENCIES AND INSPECTED AND CERTIFIED BY PROFESSIONAL AND/OR SOILS ENGINEERS LICENSED IN THE NEW YORK STATE.
- BACKFILL UNDER ANY PORTION OF THE STRUCTURE SHALL BE COMPACTED IN 6" LIFTS TO AT LEAST 95 MAXIMUM DRY DENSITY PER ASTM D-698.

SLABS ON GRADE

- SLABS ON GRADE SHALL BE AS SHOWN ON THE PLAN. REINFORCED WITH WELDED WIRE MESH - PLACE ONE INCH FROM THE TOP. SLABS SHALL BE POURED ON SIX INCHES COMPACTED POROUS FILL OVER VIRGIN SOIL OR ENGINEERED COMPACTED BACKFILL. SLABS ON GRADE SHALL BE PLACED IN ALTERNATE SECTIONS NOT TO EXCEED 1,200 SQ. FT. PER SECTION. SLABS ON GRADE SHALL BE POURED WITH 4000 PSI STONE CONCRETE.

CONSTRUCTION NOTES

- CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND EXISTING CONDITIONS BEFORE PROCEEDING WITH CONSTRUCTION.
- ALL WORK SHALL BE IN ACCORDANCE WITH THE NEW YORK CITY BUILDING CODE, LOCAL LAW 76/68 AND ALL AMENDMENTS TO DATE. IN CASE OF CONFLICT WITH OTHER CODES, THE NYC BUILDING CODE SHALL GOVERN.
- CONTRACTOR SHALL PROVIDE ALL SHORING AND BRACING AND TAKE ALL THE NECESSARY PRECAUTIONS DURING DEMOLITION AND CONSTRUCTION, AS REQUIRED TO INSURE THE STABILITY AND SAFETY OF THE STRUCTURE. HE SHALL MAKE SAFE ALL FLOORS, SIDEWALKS AND ADJOINING PROPERTY AS JOB CONDITIONS WARRANT.
- CONTRACTOR SHALL TAKE EXTREME CARE NOT TO DAMAGE EXISTING FACILITIES DURING ALTERATION, DEMOLITION AND CONSTRUCTION ANY EXISTING WORK DAMAGED BY THIS CONTRACTOR SHALL RESTORED TO THE SATISFACTION OF THE ENGINEER. SECURE AND REPAIR EXISTING STRUCTURE BEFORE PROCEEDING WITH NEW CONSTRUCTION.
- DEMOLITION OPERATIONS SHALL BE IN ACCORDANCE WITH THE NYC BUILDING CODE SUBCHAPTER 19, ARTICLE 6.
- THE OFFICE OF RIZWAN ABDUS SALAM, STRUCTURAL ENGINEER IS NOT RESPONSIBLE FOR ANY NEGLIGENCE CAUSED BY CONTRACTOR, OWNERS/SUPERVISOR.
- CONTROLLED INSPECTION, AS PER THE NYC BUILDING CODE, IS REQUIRED FOR THE FOLLOWING: A. SUBGRADE FOR FOOTINGS. B. FOOTINGS, PIERS AND WALLS. C. CONCRETE. D. HIGH TENSION BOLTS AND WELDING.

FOUNDATION NOTES

- ALL EXISTING CONDITIONS SHALL BE CHECKED AND VERIFIED IN THE FIELD BEFORE EXCAVATION IS BEGUN. EXISTING UTILITIES SHALL BE LOCATED AND PROTECTED OR RE-ROUTED AS REQUIRED BY EXCAVATION, SUCH AS UNDERGROUND UTILITIES, CESSPOOLS, ETC., SHALL BE REPORTED TO THE ENGINEER AND WORK TEMPORARILY SUSPENDED PENDING INSTRUCTION TO PROCEED.

DEFERRED STRUCTURAL...


- SOME STRUCTURAL SYSTEMS ARE DEFINED AS VENDOR-DESIGNED COMPONENTS PER THE STRUCTURAL DOCUMENTS. THESE ELEMENTS OF THE DESIGN ARE DEFERRED SUBMITTAL COMPONENTS AND HAVE NOT BEEN PERMITTED UNDER THE BASE BUILDING APPLICATION. THE CONTRACTOR WILL BE REQUIRED TO SUBMIT THE STAMPED COMPONENT SYSTEM DOCUMENTS TO THE BUILDING OFFICIAL FOR APPROVAL.
- DOCUMENTS FOR DEFERRED SUBMITTAL ITEMS SHALL BE SUBMITTED TO THE ARCHITECT, WHO SHALL REVIEW THEM AND FORWARD THEM TO THE BUILDING OFFICIALS WITH A NOTATION INDICATING THAT THE DEFERRED SUBMITTAL DOCUMENTS HAVE BEEN REVIEWED AND BEEN FOUND TO BE IN GENERAL CONFORMANCE WITH THE DESIGN OF THE BUILDING. THE DEFERRED SUBMITTAL ITEMS SHALL NOT BE INSTALLED UNTIL THE DESIGN AND SUBMITTAL DOCUMENTS HAVE BEEN APPROVED BY THE BUILDING OFFICIAL.
- THE FOLLOWING LIST INCLUDES THE ITEMS THAT ARE CONSIDERED AS "DEFERRED STRUCTURAL SUBMITTAL" COMPONENT. REFER TO THE ARCHITECTURAL, MECHANICAL AND ELECTRICAL DRAWINGS FOR IDENTIFICATION OF DEFERRED SUBMITTAL COMPONENTS.
- LIST OF THE DEFERRED STRUCTURAL SUBMITTAL COMPONENTS ARE AS FOLLOWS:
 - EXTERIOR CLADDING, METAL STUD SYSTEMS, METAL STAIRS AND LANDINGS, PRECAST EXTERIOR PANELS

Copyright © 2015 Rizwan A. Salam PE Consulting Engineers (RAS) - This drawing is an instrument of service and the sole property of the RAS or the Applicant of Record (AoR). Any use of this drawing without the consent of RAS is prohibited.
Drawing scales as indicated are for reference only and are not intended to accurately depict actual or designed conditions. Written dimensions shall govern.

CONTRACTOR SHALL VERIFY ALL FIELD CONDITIONS AND DIMENSIONS AND BE RESPONSIBLE FOR FIELD FIT AND QUALITY OF WORK. NO ALLOWANCES SHALL BE MADE IN BEHALF OF THE CONTRACTOR FOR ANY ERROR OR NEGLECT ON HIS PART.

Client: ---
Tel: --- Email: ---

Contractor:
Cristom Construction Services
151-01 14th Avenue
Whitestone NY 11357
Tel: (718) 747-4747 Email: info@cristomconstruction.com

APPLICANT OF RECORD:
**RAS P.E.**
CONSULTING ENGINEERS
RIZWAN A. SALAM, P.E.
20 E. 49TH ST. SUITE-3A
NEW YORK NY 10017
Tel: (212) 377-2456 Email: info@salamcons.com

5/12/2017 9:36:26 AM	PLOT TIME/DATE
Date	Issue No. Rev. Description

SCOPE OF WORK
**ALT II STRUCTURAL RENOVATION
OF EXISTING ONE STORY
WAREHOUSE STRUCTURE**


ADDRESS
**537-561 Johnson Avenue
Brooklyn NY 11237**

BLOCK: 2988 MAP #: 13b
LOT: 01, 49, 14 ZONING: M3-1

SHEET TITLE
**Title Sheet - Proposed Key Plan
and Construction and Structural
Notes**

SEAL & SIGNATURE	DATE: 7/28/2016
	PROJECT NO.: 170102
	DRAWING BY: HSK
	CHK BY: RAS
	DWG NO.: S-001.00
	File Directory: 484 Hsk - 170102 Johnson Avenue 157 Rizwan A Salam, P.E.
	1 OF 5

☒ Orient and affix BIS
job number label here ☒

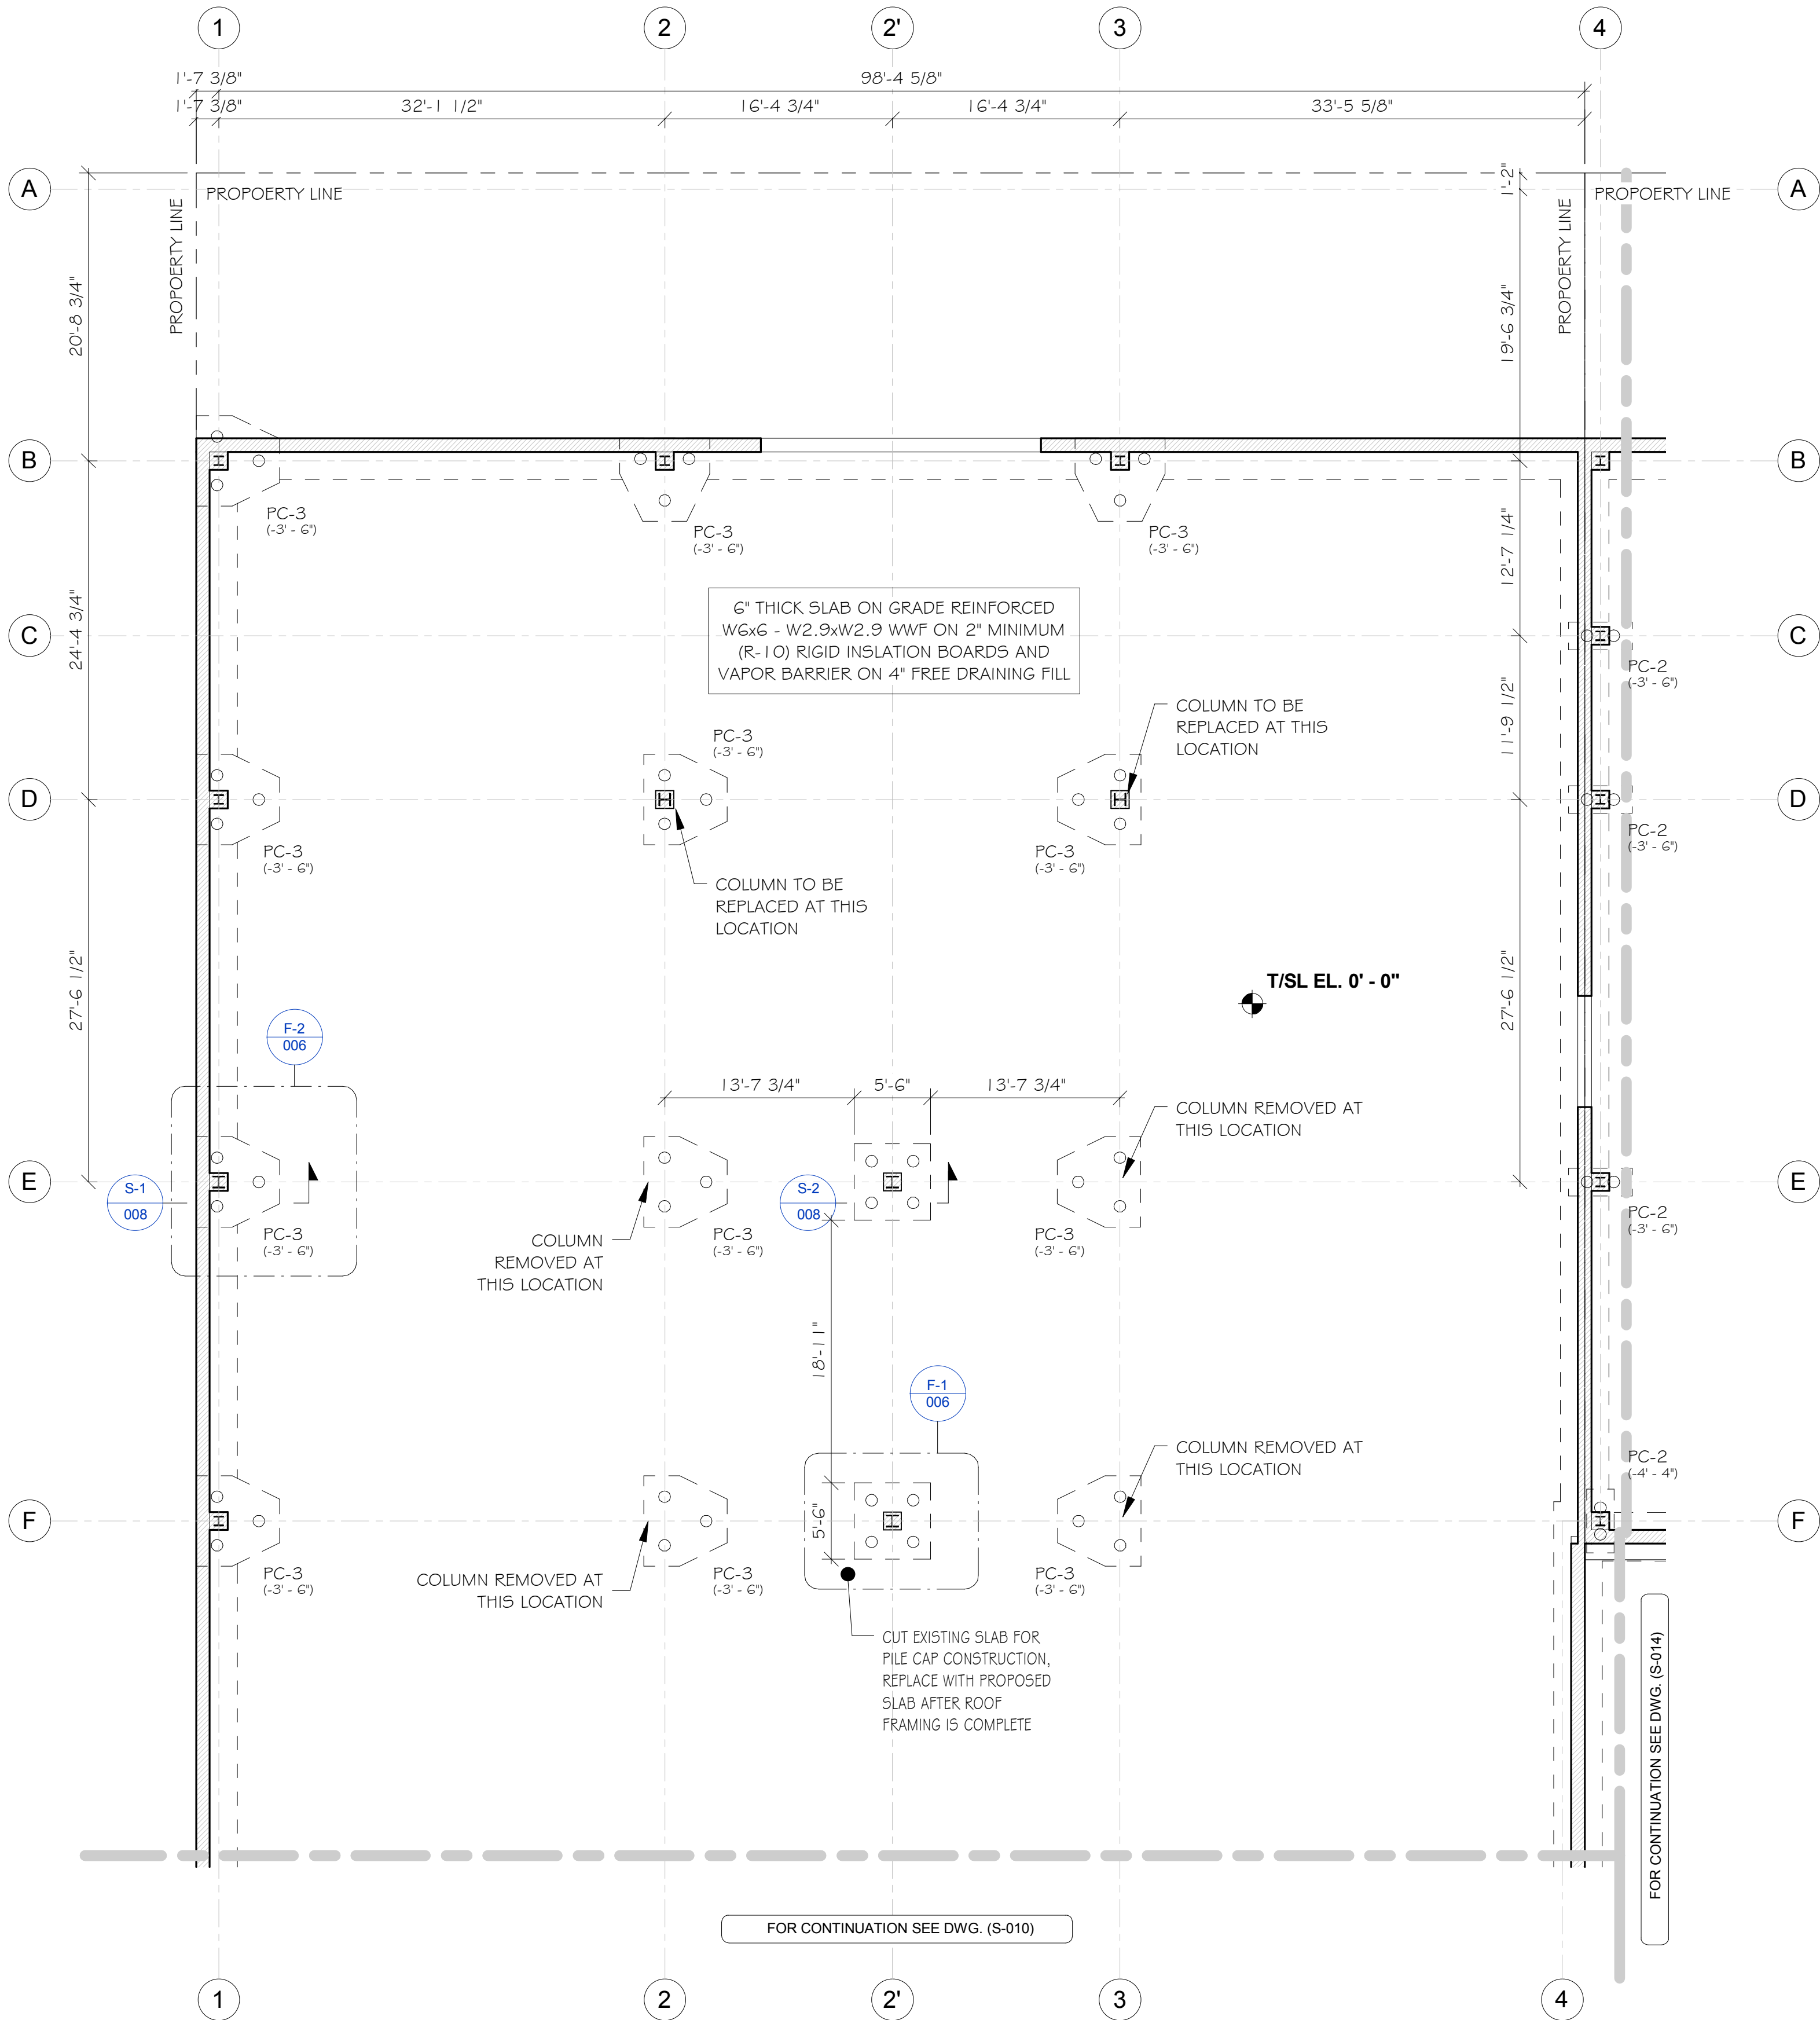


Existing Pile Cap Schedule						
Type	Dimensions			Reinforcement		Comments
	Width	Length	Thick.	Bottom	Top	
PC-2	4' - 7"	2' - 0"	3' - 0"	4-#5 BOTT. L-WAY, 8-#5 BOTT. S-WAY		
PC-3	6' - 6"	6' - 0"	3' - 0"			
PC-4	5' - 6"	5' - 6"	3' - 8"			

Grand total: 69


Proposed Pile Cap Schedule							
Type	Dimensions			Reinforcement		Qty	Volume (CY)
	Width	Length	Thick.	Bottom	Top		
PC-4	5' - 6"	5' - 6"	3' - 8"	11-#9 EACH WAY		4	14.19

Grand total: 4

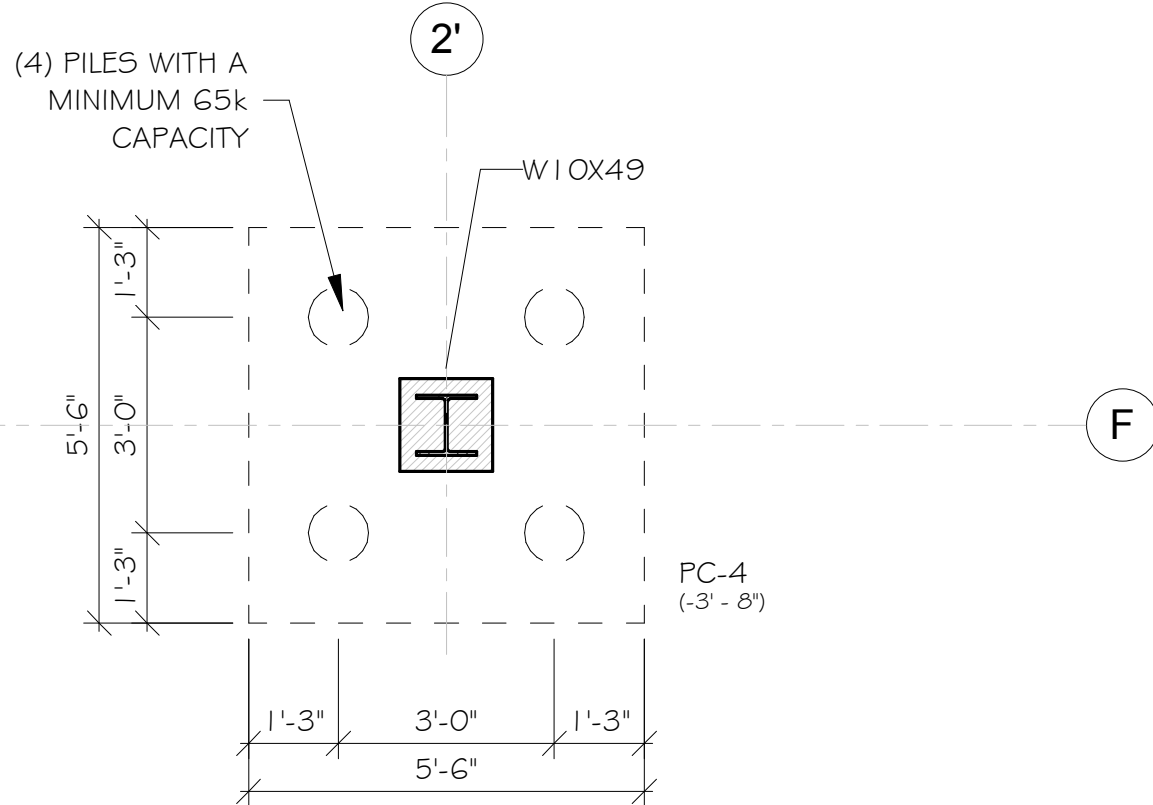

Detail (F-1) Proposed Typical Pile Cap Detail:

Scale: 3/8" = 1'-0"

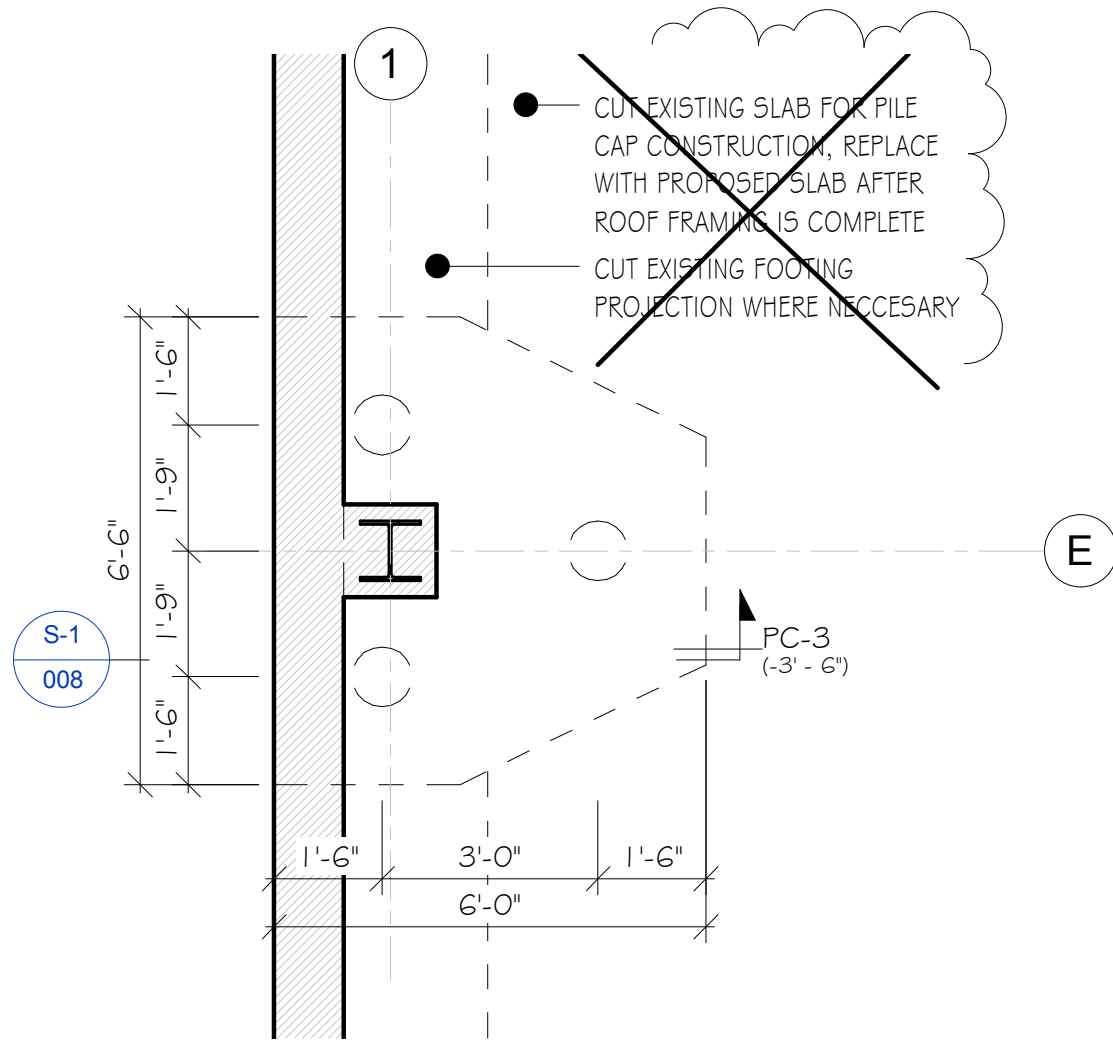

Detail (F-2) Retrofit of Ex. Perimeter Pile Cap:

Scale: 3/8" = 1'-0"

Partial - Proposed Slab on Grade and Pilecap Layout @ 537 Jonhson Ave (1 of 2):

Scale: 1/8" = 1'-0"

NOTES:

1. TOP OF CONC. SLAB ELEVATION (T/S) IS SHOWN THUS [+/-] ON PLAN.
2. SLAB TO BE A 6" THICK SLAB ON GRADE, REINFORCED W6x6 - W2.9xW2.9 WWF ON VAPOR BARRIER
3. EL. TO B.O. FOOTINGS ARE DENOTED THUS (+/-) ON PLAN RELATIVE TO BASEPLANE
4. ALL FOOTINGS SHALL BEAR ON SOIL WITH A MINIMUM 2.5 TON/SQ. FT. CAPACITY
5. WALL BUTTRESSES ARE TYPE WB1 UNLESS OTHERWISE NOTED
6. BOTTOM ELEVATION OF SPREAD FOOTING TO BE (-2'-2") FROM TOP OF SLAB, UNLESS OTHERWISE NOTED
7. EXISTING TIE (OR STRAP) BEAMS DENOTED AS GB-1 ARE 24" D X 16" W - WITH ASSUMED TOP AND BOTTOM REINFORCEMENT 3 - (#6) EXTENDED A MINIMUM OF 3'-0" INTO THE FOOTINGS. STIRRUPS ARE TO BE #3 BARS @ 10" O.C.
8. PROPOSED TIE BEAMS ARE ALSO THUS DENOTED ON PLANS AS (GB-1)
9. FOR FOOTING, BUTTRESS, AND WALL REINFORCEMENT SEE SCHEDULES AND DETAILS SHOWN ON THIS DRAWING AND SECTION DETAILS.
10. SEE DRAWINGS S-001 FOR GENERAL NOTES, LIST OF ABBREVIATIONS AND LEGEND
11. CONTRACTOR SHALL CONDUCT PRECONSTRUCTION SURVEY OF ADJACENT EXISTING BUILDINGS BEFORE CONSTRUCTION UNDERPINNING OR STRUTTING WHICH IS REQUIRED.

Copyright © 2015 Rizwan A. Salam PE Consulting Engineers (RAS) - This drawing is an instrument of service and the sole property of the RAS or the Applicant of Record (AoR). Any use of this drawing without the consent of RAS is prohibited. Drawing scales as indicated are for reference only and are not intended to accurately depict actual or designed conditions. Written dimensions shall govern.

CONTRACTOR SHALL VERIFY ALL FIELD CONDITIONS AND DIMENSIONS AND BE RESPONSIBLE FOR FIELD FIT AND QUALITY OF WORK. NO ALLOWANCES SHALL BE MADE IN BEHALF OF THE CONTRACTOR FOR ANY ERROR OR NEGLIGENCE ON HIS PART.

Client:

Tel: ---

Email:---

Contractor:


Cristom Construction Services

151-01 14th Avenue

Whitestone NY 11357

Tel: (718) 747-4747

Email: info@cristomconstruction.com

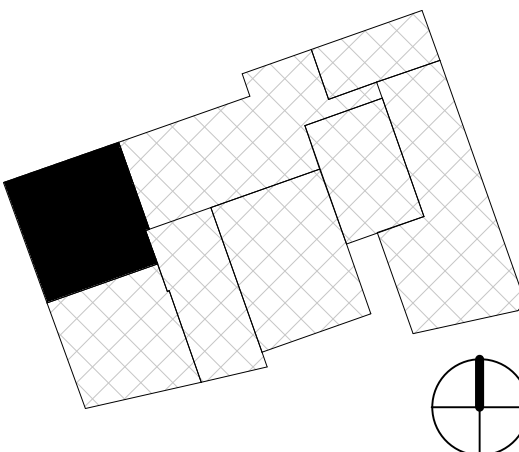

APPLICANT OF RECORD:



20 E 49TH ST. SUITE-3A

NEW YORK NY 10017

Tel: (212) 377-2456

Email: info@salamcons.com

5/12/2017 9:36:27 AM

PLOT TIME/DATE

Date 1	1	Revision 1
Date	Issue No.	Rev. Description

SCOPE OF WORK

ALT II STRUCTURAL RENOVATION OF EXISTING ONE STORY WAREHOUSE STRUCTURE

ADDRESS

537-561 Johnson Avenue
Brooklyn NY 11237

BLOCK: 2988

MAP #: 13b


LOT: 01, 49, 14

ZONING:M3-1

SHEET TITLE

Proposed Foundation Plan and Slab Layout @ 537 Johnson Avenue (1 of 2)

SEAL & SIGNATURE

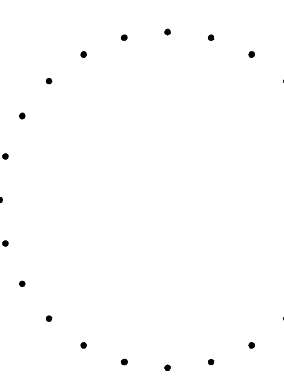

DATE: 7/28/2016

PROJECT NO.: 170102

DRAWING BY: HSK

CHK BY: RAS

DWG NO.:


S-006.00

File Directory:

2016-05-12 11:51:51 537 Johnson Avenue

10 OF 5


Orient and affix BIS job number label here

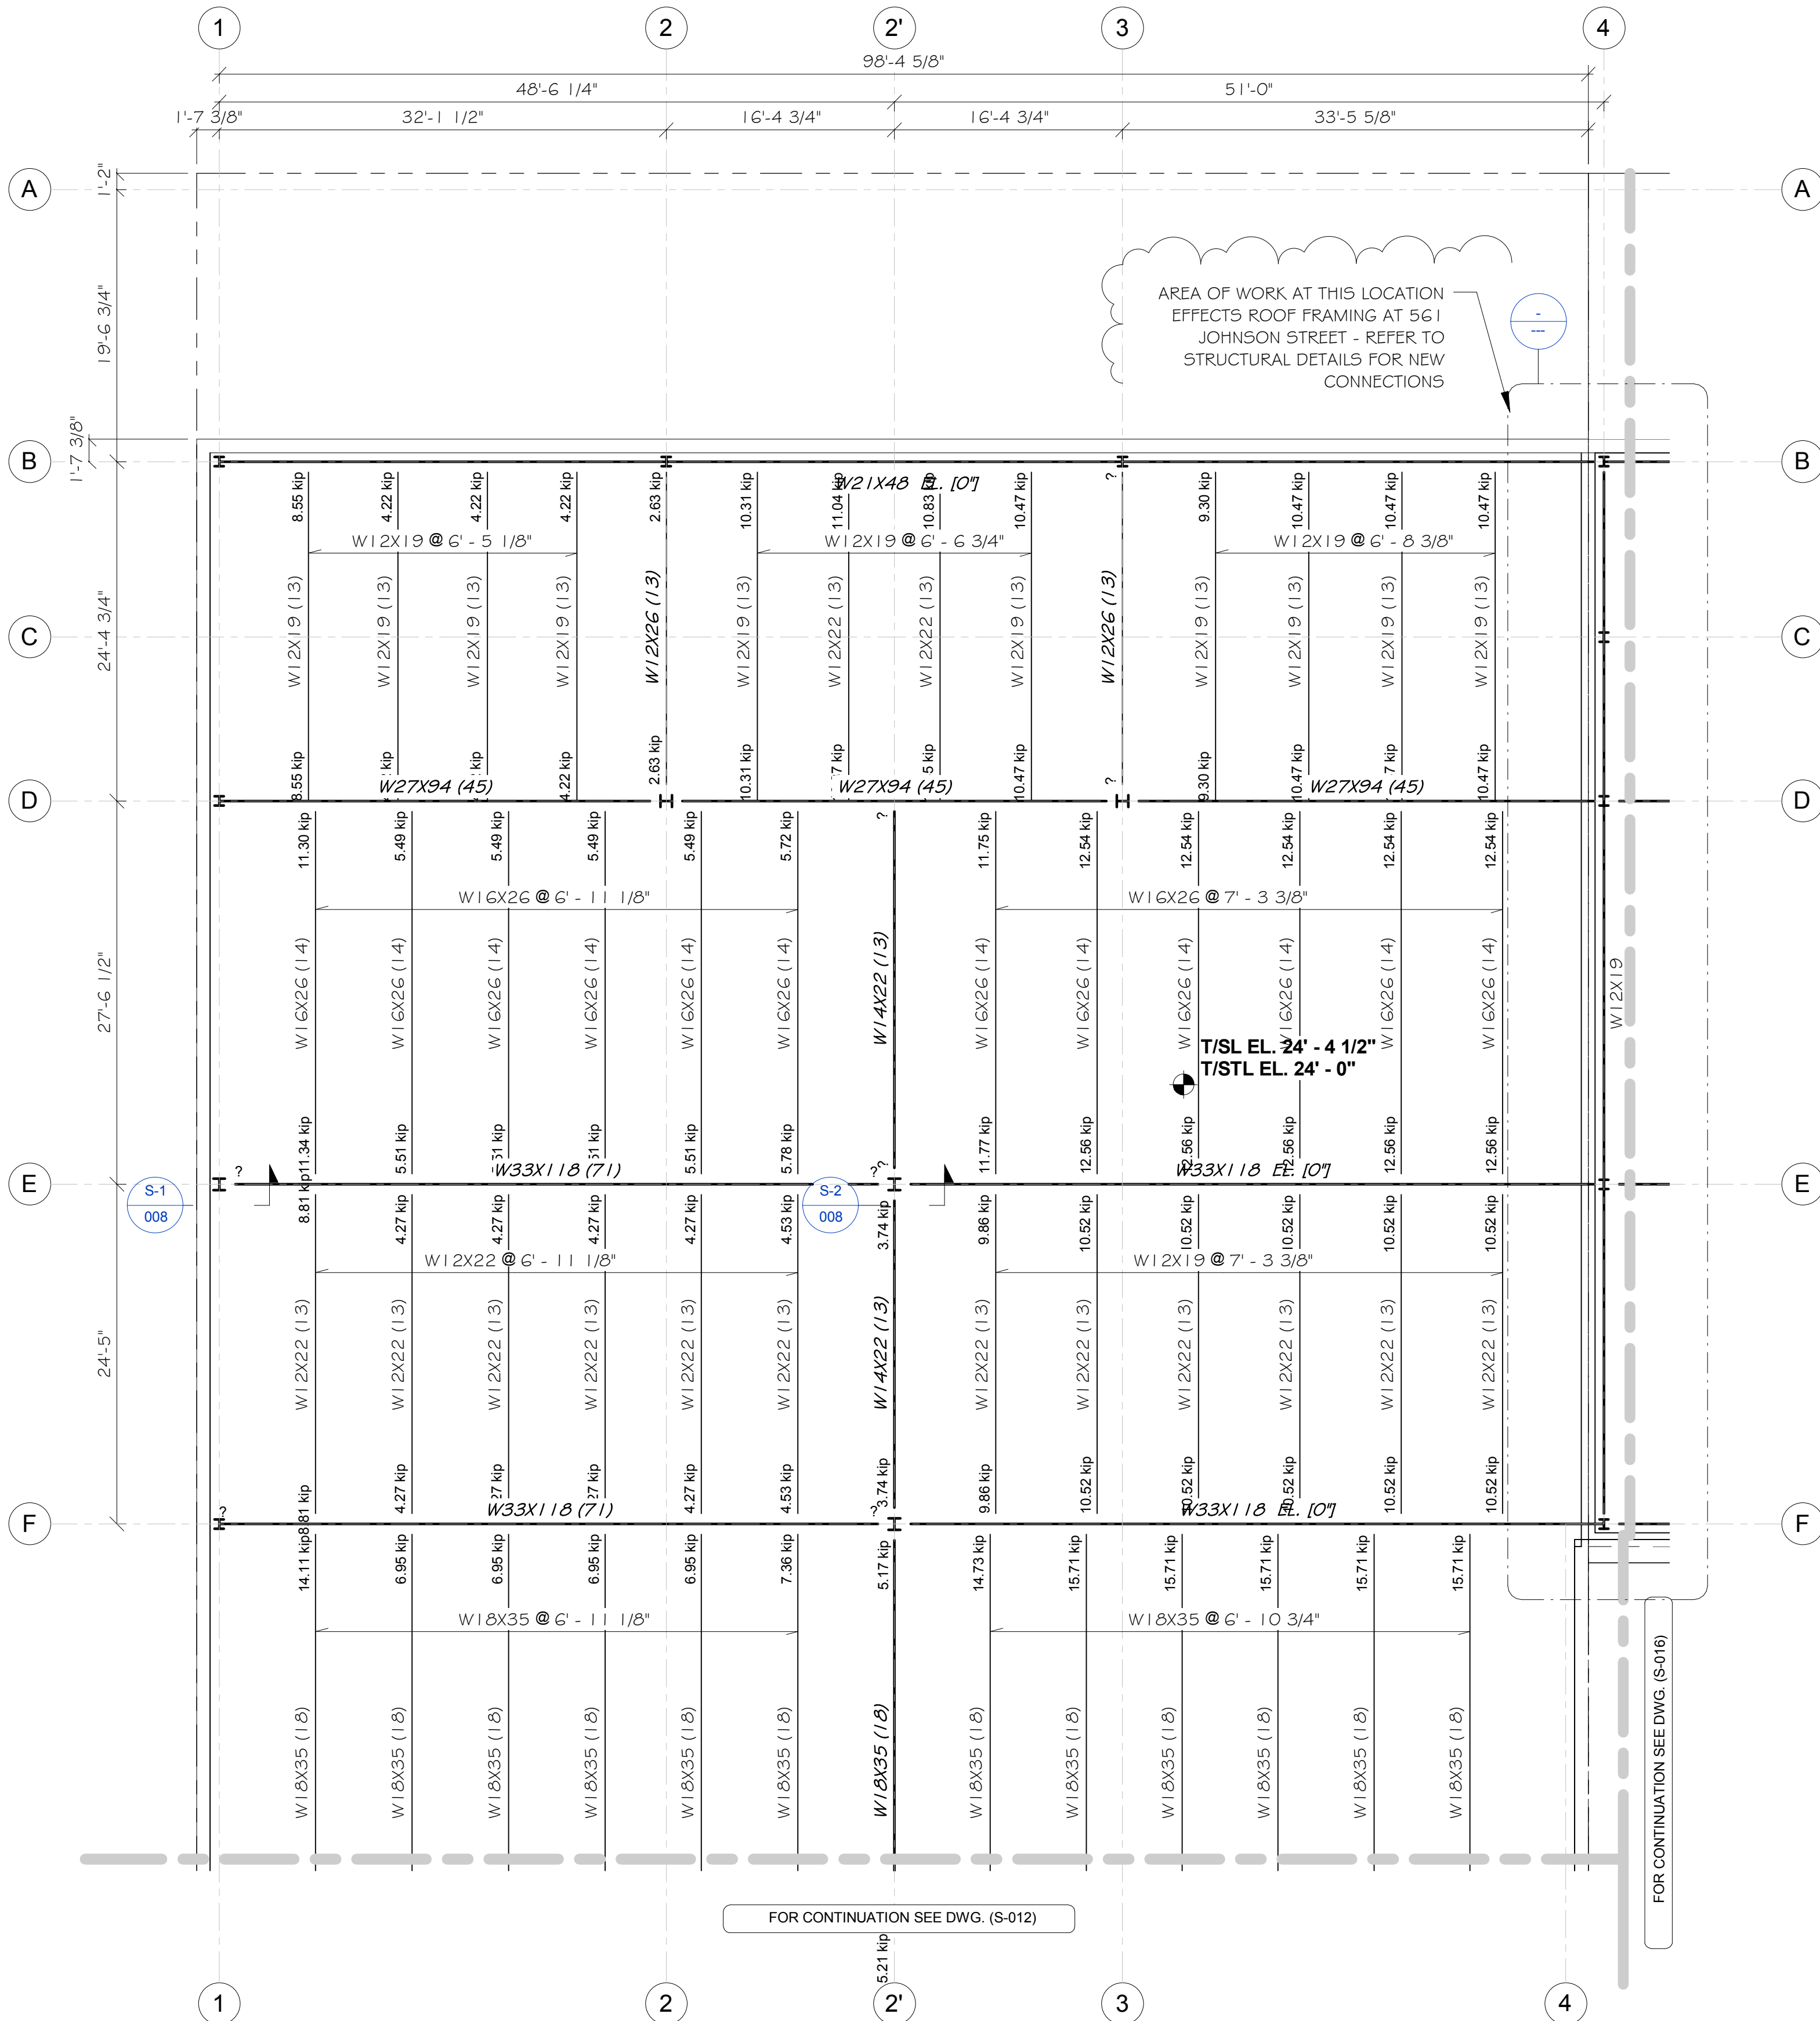

T.O. Roof	24' - 0"								T.O. Roof	24' - 0"
T.O. Mezzanine	13' - 6"	W10X49	W10X49	W10X49	W10X49	W10X49	W10X49	W10X49	T.O. Mezzanine	13' - 6"
T.O. Slab	0' - 0"								T.O. Slab	0' - 0"
Column Locations	D-2	D-3	E-2	F-2	G-2	H-2				


Proposed Column Schedule:

Scale: 3/32" = 1'-0"

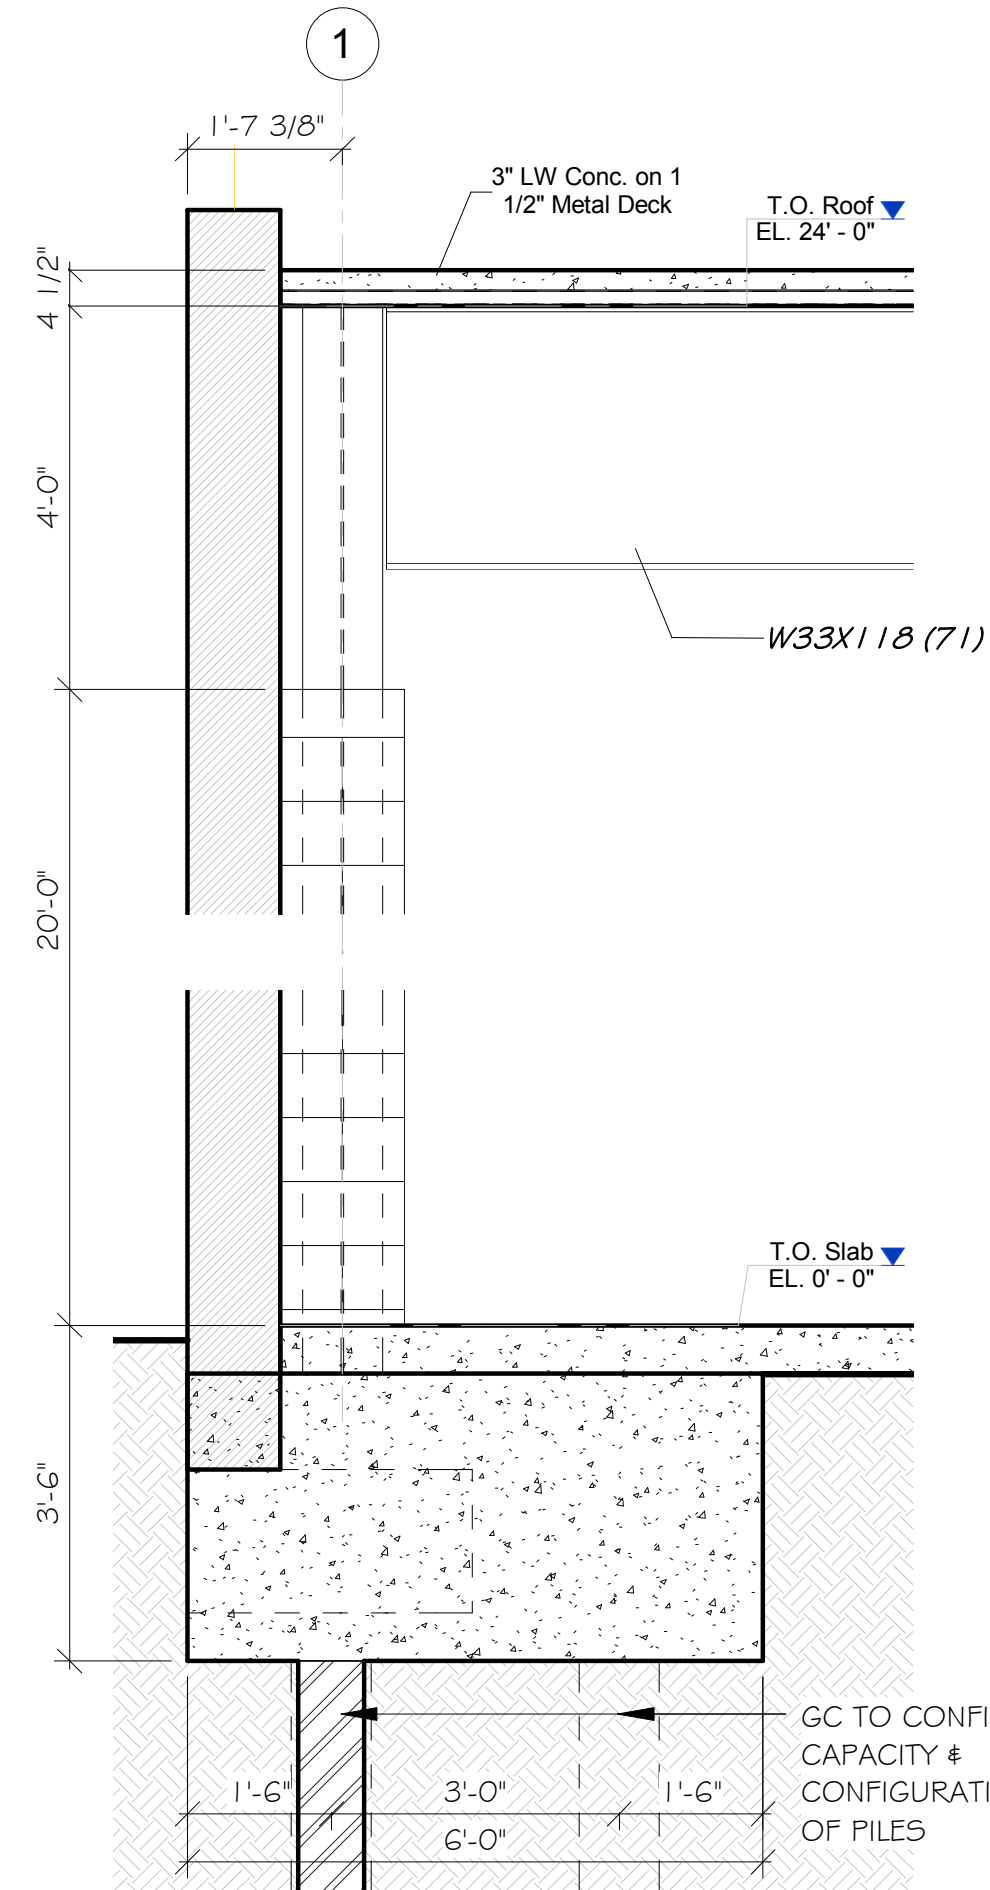

Section S-1:

Scale: 1/2" = 1'-0"

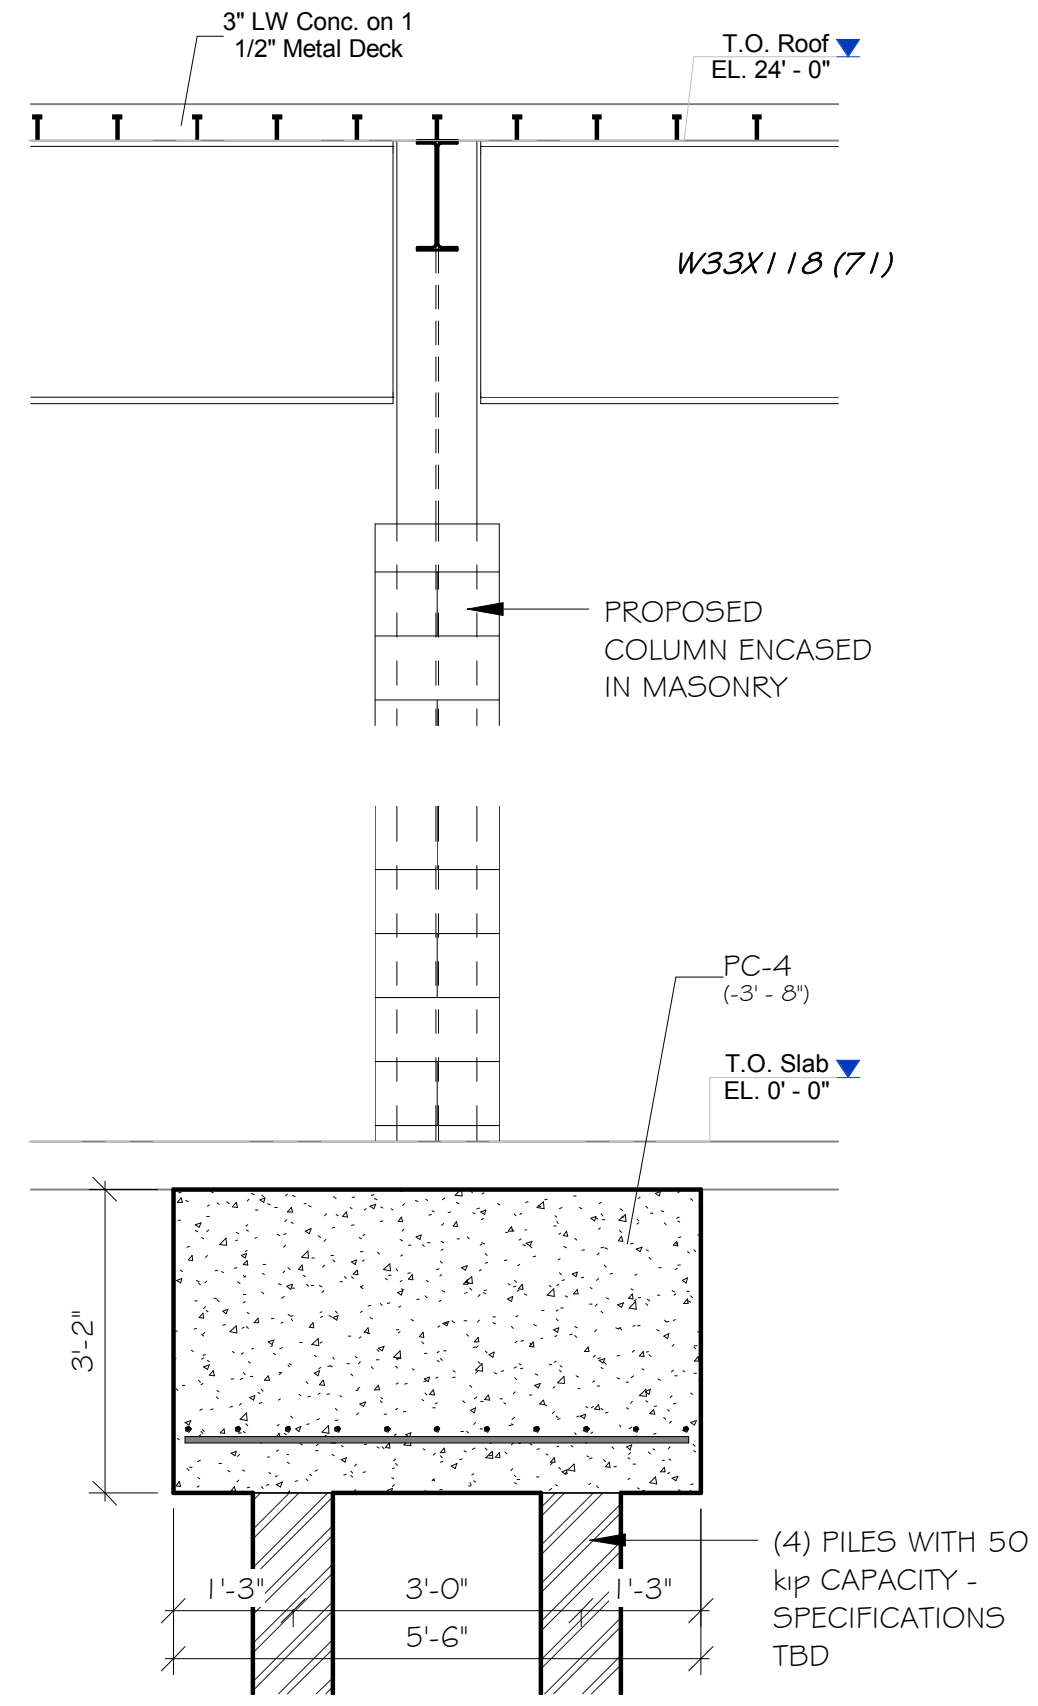

Section S-2:

Scale: 1/2" = 1'-0"

Partial - Proposed Roof Framing Plan @ 537 Johnson Ave (1 of 2):

Scale: 1/8" = 1'-0"

NOTES:

- TOP OF SLAB ELEVATION (T/S/L) IS NOTED THUS [+/-] ON PLAN
- PROPOSED ROOF SLAB IS 3" N. WT. CONCRETE ON 1-1/2x20 NON-COMPOSITE GA. MTL DECK, REINFORCED WITH WWM 6x6 - W1.4xW1.4.
- ARROW DENOTES THE DIRECTION OF THE METAL DECK
- TOP OF STRUCTURAL STEEL (T/S/T) IS 4 1/2" BELOW TOP OF SLAB (T/S/L) UNLESS NOTED THUS [+/-] ON PLAN, INDICATING DISTANCE ABOVE OR BELOW TOP OF SLAB.
- NUMBER OF SHEAR STUDS SHOWN AFTER THE BEAM SIZE (##)
- THE END REACTIONS OF THE BEAMS ARE SHOWN THUS (KIP) AT BEAM ENDS
- STEEL BEAMS SHALL BE EQUALLY SPACED WITHIN BAYS UNLESS OTHERWISE NOTED.
- BEAM SIZES NOT SHOWN SHALL BE A MINIMUM OF W12x19
- SEE DRAWINGS S-001 FOR GENERAL NOTES, LIST OF ABBREVIATIONS AND LEGEND
- FOR BRACING, SEE ELEVATIONS.
- FOR COLUMN SCHEDULE SEE S-008
- CONTRACTOR TO VERIFY ALL DIMENSIONS ON FIELD AND REPORT ANY DISCREPANCIES TO ENGINEER OF RECORD

Copyright © 2015 Rizwan A. Salam PE Consulting Engineers (RAS) - This drawing is an instrument of service and the sole property of the RAS or the Applicant of Record (AoR). Any use of this drawing without the consent of RAS is prohibited.
Drawing scales as indicated are for reference only and are not intended to accurately depict actual or designed conditions. Written dimensions shall govern.

CONTRACTOR SHALL VERIFY ALL FIELD CONDITIONS AND DIMENSIONS AND BE RESPONSIBLE FOR FIELD FIT AND QUALITY OF WORK. NO ALLOWANCES SHALL BE MADE IN BEHALF OF THE CONTRACTOR FOR ANY ERROR OR NEGLIGENCE ON HIS PART.

Client:

Tel: ---


Email:---

Contractor:

Cristom Construction Services
151-01 14th Avenue
Whitestone NY 11357

Tel: (718) 747-4747

Email: info@cristomconstruction.com

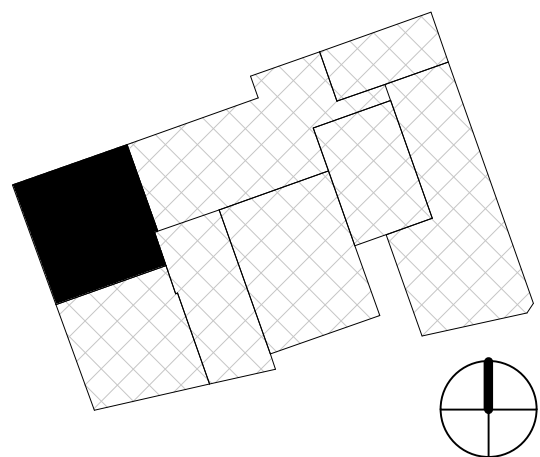

APPLICANT OF RECORD:



20 E 49TH ST. SUITE-3A
NEW YORK NY 10017

Tel: (212) 377-2456

Email: info@salamcons.com

5/12/2017 9:36:29 AM PLOT TIME/DATE

Date	Issue No.	Revision	Rev. Description

SCOPE OF WORK

ALT II STRUCTURAL RENOVATION
OF EXISTING ONE STORY
WAREHOUSE STRUCTURE

ADDRESS

537-561 Johnson Avenue
Brooklyn NY 11237

BLOCK: 2988

MAP #: 13b


LOT: 01, 49, 14

ZONING: M3-1

SHEET TITLE

Proposed Roof Framing Plan @
537 Johnson Avenue (1 of 2)

SEAL & SIGNATURE

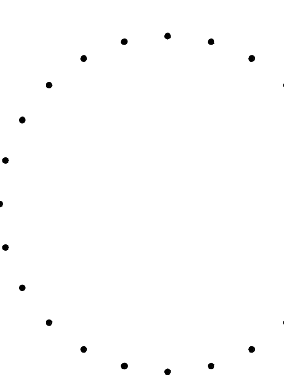

DATE: 7/28/2016

PROJECT NO.: 170102

DRAWING BY: HSK

CHK BY: RAS

DWG NO.:


S-008.00

File Directory:
484 Mid-151-01 14th Avenue 157
Whitestone Avenue 157

OF 5

Orient and affix BIS
job number label here

PROGRESS SET - NOT FOR CONSTRUCTION



Scale: 1/8" = 1'-0"

NOTES:

1. TOP OF CONC. SLAB ELEVATION (T/SU) IS SHOWN THUS (+/-) ON PLAN.
2. SLAB TO BE 6" THICK SLAB ON GRADE, REINFORCED W/6G6 - W2.9xW2.9 WWF ON VAPOR BARRIER.
3. EL. TO B.O. FOOTINGS ARE DENOTED THUS (+/-) ON PLAN RELATIVE TO BASEPLANE
4. ALL FOOTINGS SHALL BEAR ON SOIL WITH A MINIMUM 2.5 TON/SQ. FT. CAPACITY
5. WALL BUTTRESSES ARE TYPE WB1 UNLESS OTHERWISE NOTED
6. BOTTOM ELEVATION OF SPREAD FOOTING TO BE (-2'-2") FROM TOP OF SLAB, UNLESS OTHERWISE NOTED
7. EXISTING Tie (OR STRAP) BEAMS DENOTED AS GB-1 ARE 24" D X 16" W - WITH ASSUMED TOP AND BOTTOM REINFORCEMENT - 3 - (#6) EXTENDED A MINIMUM OF 3'-0" INTO THE FOOTINGS. STIRRUPS ARE TO BE #3 BARS @ 10' O.C.
8. PROPOSED Tie BEAMS ARE ALSO THUS DENOTED ON PLANS AS (GB-1)
9. FOR FOOTING, BUTTRESS, AND WALL REINFORCEMENT SEE SCHEDULES AND DETAILS SHOWN ON THIS DRAWING AND SECTION DETAILS.
10. SEE DRAWINGS 5-001 FOR GENERAL NOTES, LIST OF ABBREVIATIONS AND LEGEND
11. CONTRACTOR SHALL CONDUCT PRECONSTRUCTION SURVEY OF ADJACENT EXISTING BUILDINGS BEFORE EXCAVATION, UNDERPINNING OR STIFF SHEETING AS REQUIRED.

 Orient and affix BIS
job number label here 

Structural Framing Material Takeoff												
Family and Type	Material: Name	Structural Usage	Number of studs	Reference Level Elevation	Cut Length	Length	Volume	Material: Volume	Count	Weight (Pounds)	Steel Weight (US Tonnage)	Phase Created
W Shapes: W12X19	Steel ASTM A992	Joist	13	24' - 0"	24' - 0 1/8"	24' - 4 3/4"	0.93 CF	9.41 CF	10	4613.26	2.307	New Construction
W Shapes: W12X19	Steel ASTM A992	Joist		24' - 0"	29' - 2"	29' - 3 1/8"	1.13 CF	5.72 CF	5	2801.95	1.401	New Construction
W Shapes: W12X19	Steel ASTM A992	Joist		24' - 0"	29' - 2 1/2"	29' - 3 1/8"	1.13 CF	12.60 CF	11	6173.09	3.087	New Construction
W Shapes: W12X19	Steel ASTM A992	Joist		24' - 0"	30' - 8 3/4"	30' - 9 3/4"	1.19 CF	19.27 CF	16	9443.55	4.722	New Construction
W Shapes: W12X19	Steel ASTM A992	Joist		24' - 0"	31' - 6 1/4"	31' - 7 1/4"	1.22 CF	19.77 CF	16	9688.79	4.844	New Construction
W Shapes: W12X19	Steel ASTM A992	Girder		24' - 0"	63' - 4 3/8"	63' - 9"	2.45 CF	4.97 CF	2	2434.63	1.217	New Construction
W Shapes: W12X19	Steel ASTM A992	Girder		24' - 0"	75' - 5 3/8"	76' - 4 1/4"	2.92 CF	2.96 CF	1	1449.15	0.725	New Construction
W Shapes: W12X26	Steel ASTM A992	Joist	13	24' - 0"	23' - 6 5/8"	24' - 4 3/4"	1.24 CF	2.50 CF	2	1224.95	0.612	New Construction
W Shapes: W14X22	Steel ASTM A992	Girder	13	24' - 0"	23' - 6"	24' - 5"	1.04 CF	1.07 CF	1	522.49	0.261	New Construction
W Shapes: W14X22	Steel ASTM A992	Girder	13	24' - 0"	27' - 0 1/2"	27' - 6 1/2"	1.20 CF	1.23 CF	1	601.05	0.301	New Construction
W Shapes: W14X30	Steel ASTM A992	Girder		13' - 6"	11' - 10 1/4"	12' - 7 1/4"	0.72 CF	0.73 CF	1	359.17	0.180	New Construction
W Shapes: W14X30	Steel ASTM A992	Girder		13' - 6"	23' - 6 3/8"	24' - 3 3/8"	1.43 CF	1.45 CF	1	712.81	0.356	New Construction
W Shapes: W16X26	Steel ASTM A992	Joist	14	24' - 0"	26' - 6 3/4"	27' - 6 1/2"	1.40 CF	8.56 CF	6	4196.11	2.098	New Construction
W Shapes: W16X26	Steel ASTM A992	Joist	16	24' - 0"	29' - 10"	30' - 9 3/4"	1.57 CF	9.62 CF	6	4712.12	2.356	New Construction
W Shapes: W16X26	Steel ASTM A992	Girder	16	24' - 0"	29' - 10 3/4"	30' - 9 3/4"	1.58 CF	1.61 CF	1	787.00	0.393	New Construction
W Shapes: W18X35	Steel ASTM A992	Girder	17	24' - 0"	29' - 9 7/8"	30' - 3 3/4"	2.11 CF	2.14 CF	1	1050.32	0.525	New Construction
W Shapes: W18X35	Steel ASTM A992	Joist	16	24' - 0"	30' - 1 5/8"	31' - 1"	2.14 CF	2.17 CF	1	1061.50	0.531	New Construction
W Shapes: W18X35	Steel ASTM A992	Joist	16	24' - 0"	30' - 11"	31' - 10 3/8"	2.19 CF	2.22 CF	1	1088.83	0.544	New Construction
W Shapes: W18X35	Steel ASTM A992	Joist	17	24' - 0"	31' - 8 1/4"	32' - 7 5/8"	2.25 CF	2.28 CF	1	1116.15	0.558	New Construction
W Shapes: W18X35	Steel ASTM A992	Joist	17	24' - 0"	32' - 5 5/8"	33' - 5"	2.30 CF	2.33 CF	1	1143.48	0.572	New Construction
W Shapes: W18X35	Steel ASTM A992	Joist	18	24' - 0"	33' - 2"	34' - 2 1/2"	2.35 CF	28.60 CF	12	14016.20	7.008	New Construction
W Shapes: W18X35	Steel ASTM A992	Girder	17	24' - 0"	33' - 8 3/8"	34' - 2 1/4"	2.39 CF	2.42 CF	1	1186.73	0.593	New Construction
W Shapes: W18X35	Steel ASTM A992	Joist	18	24' - 0"	33' - 11 7/8"	34' - 11 1/4"	2.41 CF	2.44 CF	1	1197.13	0.599	New Construction
W Shapes: W18X35	Steel ASTM A992	Joist	18	24' - 0"	34' - 9"	35' - 8 3/8"	2.46 CF	2.50 CF	1	1223.90	0.612	New Construction
W Shapes: W18X35	Steel ASTM A992	Joist	19	24' - 0"	35' - 6"	36' - 5 3/8"	2.52 CF	2.55 CF	1	1250.45	0.625	New Construction
W Shapes: W18X35	Steel ASTM A992	Joist	19	24' - 0"	36' - 3"	37' - 2 1/2"	2.57 CF	2.61 CF	1	1277.00	0.638	New Construction
W Shapes: W18X35	Steel ASTM A992	Girder	17	24' - 0"	37' - 10 5/8"	37' - 11 1/2"	2.69 CF	2.72 CF	1	1334.32	0.667	New Construction
W Shapes: W21X48	Steel ASTM A992	Girder		13' - 6"	14' - 7"	15' - 0"	1.41 CF	1.43 CF	1	700.89	0.350	New Construction
W Shapes: W21X48	Steel ASTM A992	Girder		13' - 6"	14' - 10 1/4"	15' - 3 3/4"	1.43 CF	1.46 CF	1	714.00	0.357	New Construction
W Shapes: W21X48	Steel ASTM A992	Girder		24' - 0"	47' - 4"	47' - 5"	4.57 CF	4.64 CF	1	2275.38	1.138	New Construction
W Shapes: W21X48	Steel ASTM A992	Girder		24' - 0"	48' - 5"	49' - 2 1/8"	4.68 CF	4.75 CF	1	2326.89	1.163	New Construction
W Shapes: W27X84	Steel ASTM A992	Girder		24' - 0"	97' - 1 1/4"	97' - 5 3/8"	16.52 CF	16.72 CF	1	8195.16	4.098	New Construction
W Shapes: W27X94	Steel ASTM A992	Girder	45	24' - 0"	31' - 8"	32' - 1 1/2"	6.04 CF	6.10 CF	1	2989.64	1.495	New Construction
W Shapes: W27X94	Steel ASTM A992	Girder	45	24' - 0"	31' - 10 1/2"	32' - 9 1/2"	6.08 CF	6.14 CF	1	3009.31	1.505	New Construction
W Shapes: W27X94	Steel ASTM A992	Girder	45	24' - 0"	32' - 2 1/2"	32' - 9 1/2"	6.14 CF	6.21 CF	1	3040.77	1.520	New Construction
W Shapes: W27X94	Steel ASTM A992	Girder	45	24' - 0"	32' - 4 1/4"	31' - 10 1/4"	6.17 CF	6.23 CF	1	3054.54	1.527	New Construction
W Shapes: W27X94	Steel ASTM A992	Girder	45	24' - 0"	32' - 4 1/2"	32' - 1 1/2"	6.17 CF	6.24 CF	1	3056.51	1.528	New Construction
W Shapes: W27X94	Steel ASTM A992	Girder	45	24' - 0"	33' - 11 1/8"	34' - 7 1/4"	6.47 CF	6.54 CF	1	3203.49	1.602	New Construction
W Shapes: W33X118	Steel ASTM A992	Girder	71	24' - 0"	47' - 7 1/4"	48' - 6 1/4"	11.34 CF	11.48 CF	1	5624.44	2.812	New Construction
W Shapes: W33X118	Steel ASTM A992	Girder	71	24' - 0"	47' - 9 1/2"	48' - 3"	11.38 CF	23.05 CF	2	11293.19	5.647	New Construction
W Shapes: W33X118	Steel ASTM A992	Girder	71	24' - 0"	48' - 0 3/4"	48' - 6 1/4"	11.45 CF	34.77 CF	3	17035.78	8.518	New Construction
W Shapes: W33X118	Steel ASTM A992	Girder		24' - 0"	50' - 3 7/8"	51' - 0"	11.99 CF	12.14 CF	1	5946.23	2.973	New Construction
W Shapes: W33X118	Steel ASTM A992	Girder		24' - 0"	50' - 8 1/2"	51' - 0"	12.08 CF	12.23 CF	1	5990.63	2.995	New Construction
W-I-sections (with constant flange thickness)-Beam: W12X22	Steel ASTM A992	Joist	13	24' - 0"	23' - 4 1/2"	24' - 5"	1.04 CF	12.62 CF	12	6184.80	3.092	New Construction
W-I-sections (with constant flange thickness)-Beam: W12X22	Steel ASTM A992	Joist	13	24' - 0"	24' - 0 1/8"	24' - 4 3/4"	1.07 CF	2.16 CF	2	1059.02	0.530	New Construction
W-I-sections (with constant flange thickness)-Beam: W16X26	Steel ASTM A992	Joist	14	24' - 0"	26' - 3 7/8"	27' - 3 1/4"	1.38 CF	1.41 CF	1	688.46	0.344	New Construction
W-I-sections (with constant flange thickness)-Beam: W16X26	Steel ASTM A992	Joist	14	24' - 0"	26' - 6 3/4"	27' - 6 1/2"	1.39 CF	8.51 CF	6	4168.39	2.084	New Construction
W-I-sections (with constant flange thickness)-Beam: W16X26	Steel ASTM A992	Joist	16	24' - 0"	29' - 10"	30' - 9 3/4"	1.56 CF	7.96 CF	5	3900.82	1.950	New Construction
W-I-sections (with constant flange thickness)-Beam: W16X26	Steel ASTM A992	Joist	16	24' - 0"	29' - 10"	30' - 9 3/4"	1.86 CF	1.89 CF	1	927.28	0.464	New Construction
W-I-sections (with constant flange thickness)-Beam: W16X31	Steel ASTM A992	Joist	16	24' - 0"	30' - 6 3/4"	31' - 7 1/4"	1.91 CF	23.27 CF	12	11401.71	5.701	New Construction
W-I-sections (with constant flange thickness)-Beam: W16X31	Steel ASTM A992	Girder	16	24' - 0"	30' - 8 1/4"	31' - 7 1/4"	1.92 CF	1.95 CF	1	954.03	0.477	New Construction

Structural Framing Material Takeoff												
Family and Type	Material: Name	Structural Usage	Number of studs	Reference Level Elevation	Cut Length	Length	Volume	Material: Volume	Count	Weight (Pounds)	Steel Weight (US Tonnage)	Phase Created
W-I-sections (with constant flange thickness)-Beam: W18X35	Steel ASTM A992	Joist	15	24' - 0"	27' - 10 1/8"	28' - 9 1/2"	1.96 CF	1.99 CF	1	975.17	0.488	New Construction
W-I-sections (with constant flange thickness)-Beam: W18X35	Steel ASTM A992	Joist	15	24' - 0"	28' - 7 1/4"	29' - 6 5/8"	2.02 CF	2.04 CF	1	1001.80	0.501	New Construction
W-I-sections (with constant flange thickness)-Beam: W18X35	Steel ASTM A992	Girder	18	24' - 0"	33' - 3 1/2"	34' - 2 1/2"	2.35 CF	2.38 CF	1	1166.12	0.583	New Construction
W-I-sections (with constant flange thickness)-Beam: W18X40	Steel ASTM A992	Joist	15	24' - 0"	27' - 1"	28' - 0 3/8"	2.19 CF	2.21 CF	1	1084.35	0.542	New Construction
Grand total: 166							384.97 CF	166	188634.92	94.317		

Copyright © 2015 Rizwan A. Salam PE Consulting Engineers (RAS) - This drawing is an instrument of service and the sole property of the RAS or the Applicant of Record (AoR). Any use of this drawing without the consent of RAS is prohibited.
Drawing scales as indicated are for reference only and are not intended to accurately depict actual or designed conditions. Written dimensions shall govern.
CONTRACTOR SHALL VERIFY ALL FIELD CONDITIONS AND DIMENSIONS AND BE RESPONSIBLE FOR FIELD FIT AND QUALITY OF WORK. NO ALLOWANCES SHALL BE MADE IN BEHALF OF THE CONTRACTOR FOR ANY ERROR OR NEGLIGENCE ON HIS PART.

Client:

--

--

Tel: ---Email:---

Contractor:

Cristom Construction Services

151-01 14th Avenue

Whitestone NY 11357

Tel: (718) 747-4747Email: info@cristomconstruction.com

APPLICANT OF RECORD:



RAS P.E.
CONSULTING ENGINEERS
RIZWAN A. SALAM, P.E.

20 E 49TH ST. SUITE-3A
NEW YORK NY 10017

Tel: (212) 377-2456Email: info@salamcons.com

5/12/2017 9:36:33 AM	PLOT TIME/DATE
Date	Issue No. Rev. Description

SCOPE OF WORK

ALT II STRUCTURAL RENOVATION
OF EXISTING ONE STORY
WAREHOUSE STRUCTURE

ADDRESS

537-561 Johnson Avenue
Brooklyn NY 11237


BLOCK: 2988MAP #: 13b

LOT: 01, 49, 14ZONING:M3-1

SHEET TITLE

Steel Quantity Take-Off

SEAL & SIGNATURE

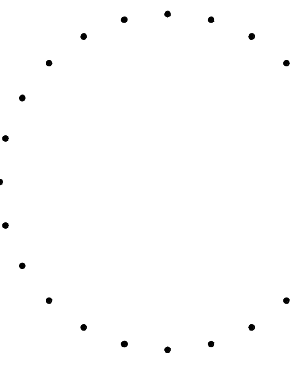

DATE: 7/28/2016
PROJECT NO.: 170102
DRAWING BY: HSK
CHK BY: RAS
DWG NO.:
S-XXX.00
File Directory:
8841 000 111-100 Johnson Avenue 157
Whitestone Avenue 01

0 OF 5